



INTERNATIONAL  
OLYMPIC  
COMMITTEE

SOG-2020-GEN-2.2 APP

# Olympic Data Feed



## ODF General Messages Interface Document

Technology and Information Department  
© International Olympic Committee

SOG-2020-GEN-2.2 APP  
4 September 2020

## License

The document accompanying this license and the information contained therein (the Document), whether in a paper or electronic format, is made available to you subject to the terms stated below. By using and/or copying all or part of the Document, you (the licensee) agree that you will comply with the following terms and conditions.

1. You may, on a non-exclusive basis, use the Document only on the condition that you abide by the terms of this license. Subject to this condition and other terms and restrictions contained herein, the Document and the information contained therein may be used (i) to further develop the standards described in the Document for use in relation with the Olympic and Paralympic Games and/or (ii) to develop similar standards for other events than the Olympic and Paralympic Games (both (i) and (ii) are hereinafter designated as the Permitted Use, and works further developing these standards for the Olympic and Paralympic Games or developing similar standards for other events are hereinafter referred to as Derivative Works), and copies of the Document or of Derivative Works may be made and distributed for the purpose of the Permitted Use, PROVIDED THAT the COPYRIGHT and references to the IOC appearing in the Document and the TERMS OF THIS LICENSE are included on ALL such COPIES, and further PROVIDED THAT you do not charge any fee or any other monetary compensation for the distribution of the Document to others. The copyright and other intellectual property rights in the Document remain vested in the IOC and the IOC remains entitled to assert his copyright or other intellectual property rights in the Document against any person or entity who does not comply with the terms of this License.
2. A copy of any Derivative Work shall be provided to the IOC free of charge. Moreover, the IOC is granted a worldwide, perpetual, unrestricted, royalty-free non-exclusive license to use any Derivative Work for the further development of the standards made by or for the IOC in relation to the Olympic and Paralympic Games (these standards and the documents describing them are hereinafter referred to as Further Standards) and to make or have made all kinds of exploitation of the Further Standards, with the right to grant sub-licenses.
3. Except if reproduced in the Document, the use of the name and trademarks of the IOC is strictly prohibited, including, without limitation, for advertising, publicity, or in relation to products or services and their names. Any use of the name or trademarks of the IOC, whether registered or not, shall require the specific written prior permission of the IOC.
4. NO WARRANTY, EXPRESSED OR IMPLIED, IS MADE REGARDING THE ACCURACY, ADEQUACY, COMPLETENESS, RELIABILITY OR USEFULNESS OF ANY INFORMATION CONTAINED IN THE DOCUMENT. The Document and the information contained herein are provided on an "as is" basis. THE IOC DISCLAIMS ALL WARRANTIES OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY WARRANTY OF NON-INFRINGEMENT OF PROPRIETARY RIGHTS, MERCHANTABILITY, OR FITNESS FOR A PARTICULAR PURPOSE. IN NO EVENT SHALL THE IOC BE LIABLE TO ANYONE FOR DAMAGES OF ANY KIND ARISING FROM OR RELATING TO YOUR ACQUISITION, USE, DUPLICATION, DISTRIBUTION, OR EXPLOITATION OF THE DOCUMENT OR ANY PORTION THEREOF, INCLUDING BUT NOT LIMITED TO, COMPENSATORY DAMAGES, LOST PROFITS, LOST DATA OR ANY FORM OF SPECIAL, INCIDENTAL, DIRECT, INDIRECT, CONSEQUENTIAL OR PUNITIVE DAMAGES, WHETHER BASED ON BREACH OF CONTRACT OR WARRANTY, TORT OR OTHERWISE. THE IOC FURTHER DISCLAIMS ANY LIABILITY FOR ANY DAMAGE CAUSED WHEN THE DOCUMENT IS USED IN A DERIVATIVE WORK. The IOC further disclaims any liability regarding the existence or inexistence of any intellectual property or other rights that might be claimed by third parties with respect to the implementation or use of the technology or information described in the Document.

The same conditions as those described in this Section shall apply mutatis mutandis to the license granted to the IOC on the Derivative Works in Section 2 above.

5. This License is perpetual subject to your conformance to its terms and conditions. The IOC may terminate this License immediately upon your breach of any of its terms and, upon such termination you will cease all use, duplication, distribution, and/or exploitation in any manner of the Document.
6. This License is governed by the laws of Switzerland. You agree that any disputes arising from or relating to this License will be resolved in the courts of Lausanne, Switzerland.

IF YOU DO NOT AGREE TO THESE TERMS YOU MUST CEASE ALL USE OF THE DOCUMENT NOW.



INTERNATIONAL  
OLYMPIC  
COMMITTEE

SOG-2020-GEN-2.2 APP

## Table of Contents

1 Introduction.....	<a href="#">12</a>
1.1 This document.....	<a href="#">12</a>
1.2 Objective.....	<a href="#">12</a>
1.3 Main Audience.....	<a href="#">12</a>
1.4 Glossary.....	<a href="#">12</a>
1.5 Related Documents.....	<a href="#">12</a>
2 Messages.....	<a href="#">13</a>
2.1 Data Messages.....	<a href="#">15</a>
2.1.1 Competition schedule / Competition schedule update.....	<a href="#">15</a>
2.1.1.1 Description.....	<a href="#">15</a>
2.1.1.2 Header Values.....	<a href="#">17</a>
2.1.1.3 Trigger and Frequency.....	<a href="#">17</a>
2.1.1.4 Message Structure.....	<a href="#">17</a>
2.1.1.5 Message Values.....	<a href="#">20</a>
2.1.1.6 Message Sort.....	<a href="#">27</a>
2.1.2 List of participants by discipline / List of participants by discipline update.....	<a href="#">28</a>
2.1.2.1 Description.....	<a href="#">28</a>
2.1.2.2 Header Values.....	<a href="#">28</a>
2.1.2.3 Trigger and Frequency.....	<a href="#">29</a>
2.1.2.4 Message Structure.....	<a href="#">29</a>
2.1.2.5 Message Values.....	<a href="#">30</a>
2.1.2.6 Message Sort.....	<a href="#">33</a>
2.1.3 List of teams / List of teams update.....	<a href="#">34</a>
2.1.3.1 Description.....	<a href="#">34</a>
2.1.3.2 Header Values.....	<a href="#">34</a>
2.1.3.3 Trigger and Frequency.....	<a href="#">35</a>
2.1.3.4 Message Structure.....	<a href="#">35</a>
2.1.3.5 Message Values.....	<a href="#">36</a>
2.1.3.6 Message Sort.....	<a href="#">39</a>
2.1.4 List of horses / List of horses update.....	<a href="#">40</a>
2.1.4.1 Description.....	<a href="#">40</a>
2.1.4.2 Header Values.....	<a href="#">40</a>
2.1.4.3 Trigger and Frequency.....	<a href="#">40</a>
2.1.4.4 Message Structure.....	<a href="#">40</a>
2.1.4.5 Message Values.....	<a href="#">41</a>
2.1.4.6 Message Sort.....	<a href="#">42</a>
2.1.5 Event Unit Start List and Results.....	<a href="#">43</a>
2.1.5.1 Description.....	<a href="#">43</a>
2.1.5.2 Header Values.....	<a href="#">43</a>
2.1.5.3 Trigger and Frequency.....	<a href="#">44</a>
2.1.5.4 Message Structure.....	<a href="#">44</a>
2.1.5.5 Message Values.....	<a href="#">54</a>
2.1.5.6 Message Sort.....	<a href="#">70</a>
2.1.6 Results Analysis.....	<a href="#">72</a>
2.1.6.1 Description.....	<a href="#">72</a>
2.1.6.2 Header Values.....	<a href="#">72</a>
2.1.6.3 Trigger and Frequency.....	<a href="#">72</a>
2.1.6.4 Message Structure.....	<a href="#">73</a>
2.1.6.5 Message Values.....	<a href="#">82</a>
2.1.6.6 Message Sort.....	<a href="#">98</a>
2.1.7 Current Information.....	<a href="#">99</a>
2.1.7.1 Description.....	<a href="#">99</a>
2.1.7.2 Header Values.....	<a href="#">99</a>
2.1.7.3 Trigger and Frequency.....	<a href="#">100</a>
2.1.7.4 Message Structure.....	<a href="#">100</a>



2.1.7.5 Message Values.....	<a href="#">106</a>
2.1.7.6 Message Sort.....	<a href="#">115</a>
2.1.8 Play by Play.....	<a href="#">116</a>
2.1.8.1 Description.....	<a href="#">116</a>
2.1.8.2 Header Values.....	<a href="#">116</a>
2.1.8.3 Trigger and Frequency.....	<a href="#">116</a>
2.1.8.4 Message Structure.....	<a href="#">116</a>
2.1.8.5 Message Values.....	<a href="#">119</a>
2.1.8.6 Message Sort.....	<a href="#">124</a>
2.1.9 Phase Results.....	<a href="#">125</a>
2.1.9.1 Description.....	<a href="#">125</a>
2.1.9.2 Header Values.....	<a href="#">125</a>
2.1.9.3 Trigger and Frequency.....	<a href="#">126</a>
2.1.9.4 Message Structure.....	<a href="#">126</a>
2.1.9.5 Message Values.....	<a href="#">130</a>
2.1.9.6 Message Sort.....	<a href="#">136</a>
2.1.10 Cumulative Results.....	<a href="#">137</a>
2.1.10.1 Description.....	<a href="#">137</a>
2.1.10.2 Header Values.....	<a href="#">137</a>
2.1.10.3 Trigger and Frequency.....	<a href="#">138</a>
2.1.10.4 Message Structure.....	<a href="#">138</a>
2.1.10.5 Message Values.....	<a href="#">143</a>
2.1.10.6 Message Sort.....	<a href="#">151</a>
2.1.11 Image.....	<a href="#">153</a>
2.1.11.1 Description.....	<a href="#">153</a>
2.1.11.2 Header Values.....	<a href="#">153</a>
2.1.11.3 Trigger and Frequency.....	<a href="#">153</a>
2.1.11.4 Message Structure.....	<a href="#">154</a>
2.1.11.5 Message Values.....	<a href="#">155</a>
2.1.11.6 Message Sort.....	<a href="#">159</a>
2.1.12 Press Photofinish.....	<a href="#">160</a>
2.1.12.1 Description.....	<a href="#">160</a>
2.1.12.2 Header Values.....	<a href="#">160</a>
2.1.12.3 Trigger and Frequency.....	<a href="#">160</a>
2.1.12.4 Message Structure.....	<a href="#">160</a>
2.1.12.5 Message Values.....	<a href="#">161</a>
2.1.12.6 Message Sort.....	<a href="#">161</a>
2.1.13 Pool Standings.....	<a href="#">162</a>
2.1.13.1 Description.....	<a href="#">162</a>
2.1.13.2 Header Values.....	<a href="#">162</a>
2.1.13.3 Trigger and Frequency.....	<a href="#">162</a>
2.1.13.4 Message Structure.....	<a href="#">163</a>
2.1.13.5 Message Values.....	<a href="#">167</a>
2.1.13.6 Message Sort.....	<a href="#">174</a>
2.1.14 Brackets.....	<a href="#">175</a>
2.1.14.1 Description.....	<a href="#">175</a>
2.1.14.2 Header Values.....	<a href="#">175</a>
2.1.14.3 Trigger and Frequency.....	<a href="#">175</a>
2.1.14.4 Message Structure.....	<a href="#">176</a>
2.1.14.5 Message Values.....	<a href="#">178</a>
2.1.14.6 Message Sort.....	<a href="#">183</a>
2.1.15 Statistics.....	<a href="#">184</a>
2.1.15.1 Description.....	<a href="#">184</a>
2.1.15.2 Header Values.....	<a href="#">184</a>
2.1.15.3 Trigger and Frequency.....	<a href="#">184</a>
2.1.15.4 Message Structure.....	<a href="#">184</a>
2.1.15.5 Message Values.....	<a href="#">188</a>
2.1.15.6 Message Sort.....	<a href="#">194</a>



2.1.16 Records.....	195
2.1.16.1 Description.....	195
2.1.16.2 Header Values.....	195
2.1.16.3 Trigger and Frequency.....	195
2.1.16.4 Message Structure.....	196
2.1.16.5 Message Values.....	198
2.1.16.6 Message Sort.....	203
2.1.17 Event Final Ranking.....	204
2.1.17.1 Description.....	204
2.1.17.2 Header Values.....	204
2.1.17.3 Trigger and Frequency.....	204
2.1.17.4 Message Structure.....	204
2.1.17.5 Message Values.....	208
2.1.17.6 Message Sort.....	213
2.1.18 Event's Medallists.....	214
2.1.18.1 Description.....	214
2.1.18.2 Header Values.....	214
2.1.18.3 Trigger and Frequency.....	214
2.1.18.4 Message Structure.....	215
2.1.18.5 Message Values.....	218
2.1.18.6 Message Sort.....	222
2.1.19 Medallists by discipline.....	223
2.1.19.1 Description.....	223
2.1.19.2 Header Values.....	223
2.1.19.3 Trigger and Frequency.....	223
2.1.19.4 Message Structure.....	223
2.1.19.5 Message Values.....	226
2.1.19.6 Message Sort.....	230
2.1.20 Configuration.....	231
2.1.20.1 Description.....	231
2.1.20.2 Header Values.....	231
2.1.20.3 Trigger and Frequency.....	231
2.1.20.4 Message Structure.....	231
2.1.20.5 Message Values.....	232
2.1.20.6 Message Sort.....	233
2.1.21 Communication.....	234
2.1.21.1 Description.....	234
2.1.21.2 Header Values.....	234
2.1.21.3 Trigger and Frequency.....	234
2.1.21.4 Message Structure.....	234
2.1.21.5 Message Values.....	237
2.1.21.6 Message Sort.....	240
2.1.22 Federation Ranking.....	241
2.1.22.1 Description.....	241
2.1.22.2 Header Values.....	241
2.1.22.3 Trigger and Frequency.....	241
2.1.22.4 Message Structure.....	241
2.1.22.5 Message Values.....	244
2.1.22.6 Message Sort.....	249
2.1.23 Weather conditions.....	250
2.1.23.1 Description.....	250
2.1.23.2 Header Values.....	250
2.1.23.3 Trigger and Frequency.....	250
2.1.23.4 Message Structure.....	250
2.1.23.5 Message Values.....	251
2.1.23.6 Message Sort.....	254
2.1.24 Medal Presenters.....	255
2.1.24.1 Description.....	255





2.1.24.2 Header Values.....	<a href="#">256</a>
2.1.24.3 Trigger and Frequency.....	<a href="#">256</a>
2.1.24.4 Message Structure.....	<a href="#">256</a>
2.1.24.5 Message Values.....	<a href="#">257</a>
2.1.24.6 Message Sort.....	<a href="#">259</a>
2.1.25 Discipline/Venue Start Transmission.....	<a href="#">259</a>
2.1.25.1 Description.....	<a href="#">259</a>
2.1.25.2 Header Values.....	<a href="#">259</a>
2.1.25.3 Trigger and Frequency.....	<a href="#">259</a>
2.1.25.4 Message Structure.....	<a href="#">259</a>
2.1.25.5 Message Values.....	<a href="#">259</a>
2.1.25.6 Sample.....	<a href="#">260</a>
2.1.25.7 Message sort.....	<a href="#">260</a>
2.1.26 Discipline/Venue Stop Transmission.....	<a href="#">260</a>
2.1.26.1 Description.....	<a href="#">260</a>
2.1.26.2 Header Values.....	<a href="#">260</a>
2.1.26.3 Trigger and Frequency.....	<a href="#">260</a>
2.1.26.4 Message Structure.....	<a href="#">260</a>
2.1.26.5 Message Values.....	<a href="#">260</a>
2.1.26.6 Sample.....	<a href="#">261</a>
2.1.26.7 Message sort.....	<a href="#">261</a>
2.1.27 Discipline/Venue Keep Alive.....	<a href="#">261</a>
2.1.27.1 Description.....	<a href="#">261</a>
2.1.27.2 Header Values.....	<a href="#">261</a>
2.1.27.3 Trigger and Frequency.....	<a href="#">261</a>
2.1.27.4 Message Structure.....	<a href="#">261</a>
2.1.27.5 Message Values.....	<a href="#">261</a>
2.1.27.6 Sample.....	<a href="#">261</a>
2.1.27.7 Message sort.....	<a href="#">261</a>
2.1.28 Participant Names.....	<a href="#">262</a>
2.1.28.1 Description.....	<a href="#">262</a>
2.1.28.2 Header Values.....	<a href="#">262</a>
2.1.28.3 Trigger and Frequency.....	<a href="#">262</a>
2.1.28.4 Message Structure.....	<a href="#">263</a>
2.1.28.5 Message Values.....	<a href="#">263</a>
2.1.28.6 Message Sort.....	<a href="#">264</a>
2.1.29 Medal Standings.....	<a href="#">264</a>
2.1.29.1 Description.....	<a href="#">264</a>
2.1.29.2 Header Values.....	<a href="#">264</a>
2.1.29.3 Trigger and Frequency.....	<a href="#">265</a>
2.1.29.4 Message Structure.....	<a href="#">265</a>
2.1.29.5 Message Values.....	<a href="#">265</a>
2.1.29.6 Sample.....	<a href="#">267</a>
2.1.29.7 Message Sort.....	<a href="#">267</a>
2.1.30 Medallists of the Day.....	<a href="#">268</a>
2.1.30.1 Description.....	<a href="#">268</a>
2.1.30.2 Header Values.....	<a href="#">268</a>
2.1.30.3 Trigger and Frequency.....	<a href="#">268</a>
2.1.30.4 Message Structure.....	<a href="#">268</a>
2.1.30.5 Message Values.....	<a href="#">269</a>
2.1.30.6 Sample.....	<a href="#">272</a>
2.1.30.7 Message Sort.....	<a href="#">272</a>
2.1.31 Global Good Morning.....	<a href="#">272</a>
2.1.31.1 Description.....	<a href="#">272</a>
2.1.31.2 Header Values.....	<a href="#">272</a>
2.1.31.3 Trigger and Frequency.....	<a href="#">273</a>
2.1.31.4 Message Structure.....	<a href="#">273</a>
2.1.31.5 Message Values.....	<a href="#">273</a>



2.1.31.6 Sample.....	273
2.1.31.7 Message sort.....	273
2.1.32 Global Good Night.....	273
2.1.32.1 Description.....	273
2.1.32.2 Header Values.....	273
2.1.32.3 Trigger and Frequency.....	274
2.1.32.4 Message Structure.....	274
2.1.32.5 Message Values.....	274
2.1.32.6 Sample.....	274
2.1.32.7 Message sort.....	274
2.1.33 Transmission Test.....	275
2.1.33.1 Description.....	275
2.1.33.2 Header Values.....	275
2.1.33.3 Trigger and Frequency.....	275
2.1.33.4 Message Structure.....	275
2.1.33.5 Message Values.....	275
2.1.33.6 Sample.....	275
2.1.33.7 Message sort.....	275
2.1.34 Background Document.....	276
2.1.34.1 Description.....	276
2.1.34.2 Header Values.....	276
2.1.34.3 Trigger and Frequency.....	276
2.1.34.4 Message Structure.....	277
2.1.34.5 Message Values.....	277
2.1.34.6 Sample.....	278
2.1.34.7 Message sort.....	279
2.1.35 Background Import Document.....	279
2.1.35.1 Description.....	279
2.1.35.2 Header Values.....	279
2.1.35.3 Trigger and Frequency.....	279
2.1.35.4 Message Structure.....	279
2.1.35.5 Message Values.....	279
2.1.35.6 Message sort.....	279
2.1.36 Participant Biography.....	280
2.1.36.1 Description.....	280
2.1.36.2 Header Values.....	280
2.1.36.3 Trigger and Frequency.....	280
2.1.36.4 Message Structure.....	280
2.1.36.5 Message Values.....	283
2.1.36.6 Sample.....	291
2.1.36.7 Message sort.....	291
2.1.37 Participant Biography Import.....	291
2.1.37.1 Description.....	291
2.1.37.2 Header Values.....	292
2.1.37.3 Trigger and Frequency.....	292
2.1.37.4 Message Structure.....	292
2.1.37.5 Message Values.....	292
2.1.37.6 Message sort.....	293
2.1.38 Team Biography.....	294
2.1.38.1 Description.....	294
2.1.38.2 Header Values.....	294
2.1.38.3 Trigger and Frequency.....	294
2.1.38.4 Message Structure.....	294
2.1.38.5 Message Values.....	295
2.1.38.6 Message sort.....	297
2.1.39 Team Biography Import.....	298
2.1.39.1 Description.....	298
2.1.39.2 Header Values.....	298





2.1.39.3 Trigger and Frequency.....	298
2.1.39.4 Message Structure.....	298
2.1.39.5 Message Values.....	298
2.1.39.6 Message sort.....	299
2.1.40 NOC/NPC Biography.....	299
2.1.40.1 Description.....	299
2.1.40.2 Header Values.....	299
2.1.40.3 Trigger and Frequency.....	299
2.1.40.4 Message Structure.....	299
2.1.40.5 Message Values.....	301
2.1.40.6 Message sort.....	303
2.1.41 NOC/NPC Biography Import.....	303
2.1.41.1 Description.....	303
2.1.41.2 Header Values.....	303
2.1.41.3 Trigger and Frequency.....	303
2.1.41.4 Message Structure.....	303
2.1.41.5 Message Values.....	303
2.1.41.6 Message sort.....	304
2.1.42 Horse Biography.....	304
2.1.42.1 Description.....	304
2.1.42.2 Header Values.....	304
2.1.42.3 Trigger and Frequency.....	304
2.1.42.4 Message Structure.....	304
2.1.42.5 Message Values.....	305
2.1.42.6 Message sort.....	306
2.1.43 Horse Biography Import.....	306
2.1.43.1 Description.....	306
2.1.43.2 Header Values.....	306
2.1.43.3 Trigger and Frequency.....	306
2.1.43.4 Message Structure.....	306
2.1.43.5 Message Values.....	307
2.1.43.6 Message sort.....	307
2.1.44 Flagbearers.....	308
2.1.44.1 Description.....	308
2.1.44.2 Header Values.....	308
2.1.44.3 Trigger and Frequency.....	308
2.1.44.4 Message Structure.....	309
2.1.44.5 Message Values.....	309
2.1.44.6 Sample.....	310
2.1.44.7 Message sort.....	310
2.1.45 Alert.....	311
2.1.45.1 Description.....	311
2.1.45.2 Header Values.....	311
2.1.45.3 Trigger and Frequency.....	311
2.1.45.4 Message Structure.....	311
2.1.45.5 Message Values.....	312
2.1.45.6 Sample.....	312
2.1.45.7 Message sort.....	312
2.1.46 TV Tracking.....	313
2.1.46.1 Description.....	313
2.1.46.2 Header Values.....	313
2.1.46.3 Trigger and Frequency.....	313
2.1.46.4 Message Structure.....	313
2.1.46.5 Message Values.....	314
2.1.46.6 Sample.....	315
2.1.46.7 Message sort.....	315
2.1.47 News Document.....	315
2.1.47.1 Description.....	316



- 2.1.47.2 Header Values..... [316](#)
- 2.1.47.3 Trigger and Frequency..... [316](#)
- 2.1.47.4 Message Structure..... [316](#)
- 2.1.47.5 Message Values..... [317](#)
- 2.1.47.6 Sample..... [319](#)
- 2.1.47.7 Message sort..... [320](#)
- 2.1.48 News Document Import..... [321](#)
  - 2.1.48.1 Description..... [321](#)
  - 2.1.48.2 Header Values..... [321](#)
  - 2.1.48.3 Trigger and Frequency..... [321](#)
  - 2.1.48.4 Message Structure..... [321](#)
  - 2.1.48.5 Message Values..... [321](#)
  - 2.1.48.6 Message sort..... [321](#)
- 2.1.49 Transport Document (Shuttle Service)..... [321](#)
  - 2.1.49.1 Description..... [321](#)
  - 2.1.49.2 Header Values..... [322](#)
  - 2.1.49.3 Trigger and Frequency..... [322](#)
  - 2.1.49.4 Message Structure..... [322](#)
  - 2.1.49.5 Message Values..... [323](#)
  - 2.1.49.6 Message sort..... [323](#)
- 2.1.50 Transport Document Import (Shuttle Service)..... [323](#)
  - 2.1.50.1 Description..... [323](#)
  - 2.1.50.2 Header Values..... [324](#)
  - 2.1.50.3 Trigger and Frequency..... [324](#)
  - 2.1.50.4 Message Structure..... [324](#)
  - 2.1.50.5 Message Values..... [324](#)
  - 2.1.50.6 Message sort..... [324](#)
- 2.1.51 Extended Start List..... [324](#)
  - 2.1.51.1 Description..... [324](#)
  - 2.1.51.2 Header Values..... [325](#)
  - 2.1.51.3 Trigger and Frequency..... [325](#)
  - 2.1.51.4 Message Structure..... [325](#)
  - 2.1.51.5 Message Values..... [333](#)
  - 2.1.51.6 Message sort..... [334](#)
- 2.1.52 Pictures..... [334](#)
  - 2.1.52.1 Description..... [334](#)
  - 2.1.52.2 Header Values..... [334](#)
  - 2.1.52.3 Trigger and Frequency..... [334](#)
  - 2.1.52.4 Message Structure..... [334](#)
  - 2.1.52.5 Message Values..... [335](#)
  - 2.1.52.6 Sample..... [335](#)
  - 2.1.52.7 Message sort..... [335](#)
- 2.1.53 Notification Message..... [335](#)
  - 2.1.53.1 Description..... [335](#)
  - 2.1.53.2 Header Values..... [335](#)
  - 2.1.53.3 Trigger and Frequency..... [336](#)
  - 2.1.53.4 Message Structure..... [336](#)
  - 2.1.53.5 Message Values..... [336](#)
  - 2.1.53.6 Sample..... [336](#)
  - 2.1.53.7 Message sort..... [336](#)
- 2.1.54 Schedule and Results by NOC..... [337](#)
  - 2.1.54.1 Description..... [337](#)
  - 2.1.54.2 Header Values..... [337](#)
  - 2.1.54.3 Trigger and Frequency..... [337](#)
  - 2.1.54.4 Message Structure..... [337](#)
  - 2.1.54.5 Message Values..... [339](#)
  - 2.1.54.6 Message sort..... [342](#)
- 2.1.55 List of Codes..... [343](#)



2.1.55.1 Description.....	343
2.1.55.2 Header Values.....	343
2.1.55.3 Trigger and Frequency.....	343
2.1.55.4 Message Structure.....	344
2.1.55.5 Message Values.....	344
2.1.55.6 Samples.....	346
2.1.55.7 Code Sets Included.....	346
2.1.55.8 Message sort.....	348
2.1.56 Venue Conditions.....	349
2.1.56.1 Description.....	349
2.1.56.2 Header Values.....	349
2.1.56.3 Trigger and Frequency.....	349
2.1.56.4 Message Structure.....	350
2.1.56.5 Message Values.....	351
2.1.56.6 Sample.....	354
2.1.56.7 Message sort.....	356
2.1.57 Weather Alerts.....	356
2.1.57.1 Description.....	356
2.1.57.2 Header Values.....	356
2.1.57.3 Trigger and Frequency.....	356
2.1.57.4 Message Structure.....	357
2.1.57.5 Message Values.....	357
2.1.57.6 Sample.....	358
2.1.57.7 Message sort.....	358
3 PDF Feed.....	359
3.1 PDF Feed Messages.....	359
3.1.1 PDF Message.....	359
3.1.1.1 Description.....	359
3.1.1.2 Header Values.....	359
3.1.1.3 Trigger and Frequency.....	360
3.1.1.4 Message Structure.....	360
3.1.1.5 Message Values.....	360
3.1.1.6 Sample (Good Morning).....	362
3.1.1.7 Sample (Normal Message).....	362
3.1.1.8 Message sort.....	362
4 Document Control.....	362

## 1 Introduction

### 1.1 This document

This document builds on the ODF Foundation Principles document to provide the details of the implementation of each message which forms part of ODF.

The ODF Foundation Principles should be read prior to reading this document.

### 1.2 Objective

The objective of this document is to provide a complete and formal definition of the ODF General Data Dictionary.

### 1.3 Main Audience

The main audience of this document is the IOC as the owner, ODF users such as the World News Press Agencies, Rights Holding Broadcasters, International Sports Federations and National Olympic Committees.

### 1.4 Glossary

The following abbreviations are used in this document.

Acronym	Description
Full RSC	Full 34 character results system code in the form: DDDGEEEEEEEEEEEEEEEEEEEEPPPPUUUUUUUU DDD according to CC @Discipline G according to CC @DisciplineGender EEEEEEEEEEEEEEEEEEEE according to CC @Event PPPP according to CC @Phase UUUUUUUU according to CC @Unit
IF	International Federation
IOC	International Olympic Committee
NOC	National Olympic Committee
ODF	Olympic Data Feed
RSC	Results System Code
WNPA	World News Press Agencies

### 1.5 Related Documents

Document Title	Document Description
ODF General Principles Document	The document explains the environment and general principles for ODF.
ODF Common Codes	The document describes the ODF Common codes
ODF Header Values	The document details the header values which shows which RSCs are used in which messages.
ORIS Sports Documents	These document details the sport specific requirements

## 2 Messages

Message Generation Responsibilities				
Document Type	OVR Provider	Central Provider	Other	Comment
DT_ALERT	OVR	Central		Central for TICKER, NEWS & SERVICE OVR for RESULTS
DT_BCK		Central		
DT_BCK_IMP			Content Provider	
DT_BIO_HOR		Central		
DT_BIO_HOR_IMP			Content Provider	
DT_BIO_NOC		Central		
DT_BIO_NOC_IMP			Content Provider	
DT_BIO_PAR		Central		
DT_BIO_PAR_IMP			Content Provider	
DT_BIO_TEA		Central		
DT_BIO_TEA_IMP			Content Provider	
DT_BRACKETS	OVR			
DT_CODES		Central		
DT_COMMUNICATION	OVR			
DT_CONFIG	OVR			
DT_CUMULATIVE_RESULT	OVR			
DT_CURRENT	OVR			
DT_ESL		Central		
DT_FED_RANKING	OVR			
DT_FLAGBEARER		Central		
DT_GLOBAL_GM		Central		
DT_GLOBAL_GN		Central		
DT_IMAGE	OVR	Central		Central for UNIFORM OVR for photofinish and play by play images
DT_KA	OVR	Central		OVR for sports venue, Central for central.
DT_LOCAL_OFF	OVR			
DT_LOCAL_ON	OVR			
DT_MEDALLISTS	OVR			
DT_MEDALLISTS_DAY		Central		
DT_MEDALLISTS_DISCIPLINE	OVR			
DT_MEDALS	OVR	Central		OVR by discipline, Central overall
DT_NEWS		Central		
DT_NEWS_IMP			OCOG	If applicable



Document Type	Message Generation Responsibilities			Comment
	OVR Provider	Central Provider	Other	
DT_NOTIFICATION		Central		
DT_PARTIC		Central		
DT_PARTIC_HORSES		Central		Equestrian only
DT_PARTIC_HORSES_UPDATE	OVR			Equestrian & Modern Pentathlon
DT_PARTIC_NAME		Central		Data by OCOG
DT_PARTIC_TEAMS		Central		
DT_PARTIC_TEAMS_UPDATE	OVR			
DT_PARTIC_UPDATE	OVR			
DT_PDF	OVR	Central		
DT_PHASE_RESULT	OVR			
DT_PIC		Central	HEADSHOT Provider	Central for ACR, provider for HEADSHOT
DT_PLAY_BY_PLAY	OVR			
DT_POOL_STANDING	OVR			
DT_PRESENTER	OVR			Central application, not OVR
DT_PRESSPHOTOFINISH_LK	OVR			
DT_RANKING	OVR			
DT_RECORD	OVR	Central		OVR for PARTIAL, Central for FULL
DT_RESULT	OVR			
DT_RESULT_ANALYSIS	OVR			
DT_SCHED_RES_NOC		Central		
DT_SCHEDULE		Central		
DT_SCHEDULE_UPDATE	OVR	Central		OVR for competition, Central for non-competition
DT_STATS	OVR			
DT_TRS				N/A
DT_TRS_IMP				N/A
DT_TV_TRACKING		Central		
DT_VEN_COND			Weather Provider	
DT_WEA_ALERT			Weather Provider	
DT_WEATHER			Weather Provider	



## **2.1 Data Messages**

### **2.1.1 Competition schedule / Competition schedule update**

#### **2.1.1.1 Description**

The Competition schedule is a bulk message provided for one discipline. As a general rule, it contains the complete schedule information for all event units needed to run a competition and excludes event units for activities such as unofficial training and press conferences.

This message contains the competition timetable for a complete discipline as well as status for each competition unit and is updated from OVR via the schedule update message.

All event units in codes which have the 'schedule' flag set to 'Y' or 'S' are included in schedule messages regardless of status (those without status must be sent as UNSCHEDULED if the schedule flag is 'Y' or 'S').

The arrival of the competition schedule message resets all the previous schedule information for one discipline.

The StartList component of the message is only included in the case that the Unit Type is one of HATH, HCOUP, HNOC or HTEAM and at least one of the competitors are known.

The Composition component (i.e. listing athletes) is only included in the case that the Unit Type is one of HATH or HCOUP.

For reference the applicable unit types (from common codes) are:

HATH Individual Head to Head units (e.g. ARC, BDM, TEN, SBD etc)

HCOUP Pairs/Couples Head to Head units (e.g. BDM, TEN etc)

HNOC NOC Head to Head units (e.g. ARC, ALP )

HTEAM Teams Head to Head units (e.g. BKB, VBV, HBL, CUR, IHO etc)

Managing when start times are not known.

In some disciplines the start time of each unit is not known and the unit are managed by order rather than time.

In these disciplines only the time of the first unit (or first unit per location) is known and distributed. In this case all units should be sent with the same start time and those following units flagged as HideStartDate (and finish). To be able to correctly order these units then the Order attribute is used (and must be sent from the venue).

To ensure there are no incorrectly ordered units then the start time must not be updated to the actual start time (there is an actual start time field to cater for this). For example:

Start Time	Display	Unit	HideStartDate	Location	Order
12:00	12:00	Unit 1	N	Court 2	1
12:00	Match 2	Court 2 Unit 2	Y	Court 2	2
12:00	Match 3	Court 2 Unit 3	Y	Court 2	3
16:30	Not before 16:30	Unit 4	Y	Court 2	4

If the discipline requires some text describing the order then StartText is used. Typical uses include "Not before 17:00" or "SUN 29 - 2nd match on CC" or "Follows".

Advice for end users - how to sort event units and use DT\_SCHEDULE:

- When displaying the schedule users must use the following sort order to display as intended:

1. By day (or filter by day)
2. By location if applicable (in a small number of sports, when EventOrder = LOC in Discipline codes)
3. By Time (regardless if HideStartDate="Y")
4. By Order

- The Order is sent for all units where HideStartDate="Y" or if special ordering is required else not sent. Start with 1 each new session each day

- End users should display StartText if HideStartDate="Y"

If a StartText value of "Not before hh:mm" is used then it is expected that the StartDate sent is the same hh:mm.

Competition schedule update:

Competition schedule update is an update message. It is not a complete schedule information message, but only the schedule data being modified.

The arrival of this message updates the previous schedule information for one particular event unit(s) or sessions(s), but does not notify any other change for the rest of the event units/sessions except for those contained in the message.

The key of the information updated is Unit @Code. Therefore, any new unit, deleted unit or updated unit will be identified by all this attribute.

It has to be understood that if one DT\_SCHEDULE message arrives, then all previous DT\_SCHEDULE\_UPDATE messages should be discarded.

When message is sent from Competition Schedule application in advance of the Games the element ExtendedInfos/EntendedInfo will contain following information:



- Type=CS, Code=VERSION, the attribute Value will indicate the version details from the competition schedule application

- Type=CS, Code=STATUS the attribute Value will indicate the status details from the competition schedule application

### 2.1.1.2 Header Values

The following table describes the message header attributes.

Attribute	Value	Comment
CompetitionCode	<a href="#">CC.@Competition</a>	Unique ID for competition
DocumentCode	<a href="#">CC.@Discipline</a>	Full RSC at the discipline level
DocumentType	DT_SCHEDULE DT_SCHEDULE_UPDATE /	Competition schedule bulk / update
Version	1...V	Version number associated to the message's content. Ascendant number
FeedFlag	"P"-Production "T"-Test	Test message or production message.
Date	Date	Date when the message is generated, expressed in the local time zone where the message was produced.
Time	Time	Time up to milliseconds when the message is generated, expressed in the local time zone where the message was produced.
LogicalDate	Date	Logical Date of events. This is the same as the physical day except when the unit or message transmission extends after midnight. See full explanation in ODF Foundation.
Source	<a href="#">SC.@Source</a>	Code indicating the system which generated the message.

### 2.1.1.3 Trigger and Frequency

The competition schedule will be sent as a bulk message (DocumentType="DT\_SCHEDULE") when available before the Games and then sent multiple times until a date to be confirmed after which only update messages will be sent (DocumentType="DT\_SCHEDULE\_UPDATE") by OVR. There is no automatic triggering and this (DT\_SCHEDULE) message must not be sent after the transfer of control to OVR.

The competition schedule update message should be triggered at any time there has been a competition schedule modification for any previously sent competition schedule bulk message or update message including the addition of start list details (H2H).

Generally start list details for H2H units should be sent immediately when officially known which should be as soon as possible after the preceding unit changes to official.

The triggers for status changes are described in each sport data dictionary where differences are needed.

If any text descriptions change in a message (as opposed to the code) then this message is not resent to correct previous messages however the new data is to be used in future messages.


### 2.1.1.4 Message Structure

The following table defines the structure of the message.

Level 1	Level 2	Level 3	Level 4	Level 5	Level 6	Level 7	Level 8	Level 9	Level 10
<a href="#">Competition (0.1)</a>									



	Gen		
	Sport		
	Codes		
	<a href="#">ExtendedInfos (0,1)</a>		
		<a href="#">ExtendedInfo (1,N)</a>	
			Type
			Code
			Pos
			Value
			<a href="#">Extension (0,N)</a>
			Code
			Pos
			Value
	<a href="#">Session (0,N)</a>		
		SessionCode	
		StartDate	
		EndDate	
		Leadin	
		Venue	
		VenueName	
		ModificationIndicator	
		SessionStatus	
		SessionType	
		Medal	
		<a href="#">SessionName (1,N)</a>	
			Language
			Value
	<a href="#">Unit (0,N)</a>		
		Code	
		PhaseType	
		UnitNum	
		ScheduleStatus	
		StartDate	
		HideStartDate	
		EndDate	
		HideEndDate	
		ActualStartDate	
		ActualEndDate	
		Order	
		Medal	
		Venue	
		Location	
		MediaAccess	
		SessionCode	

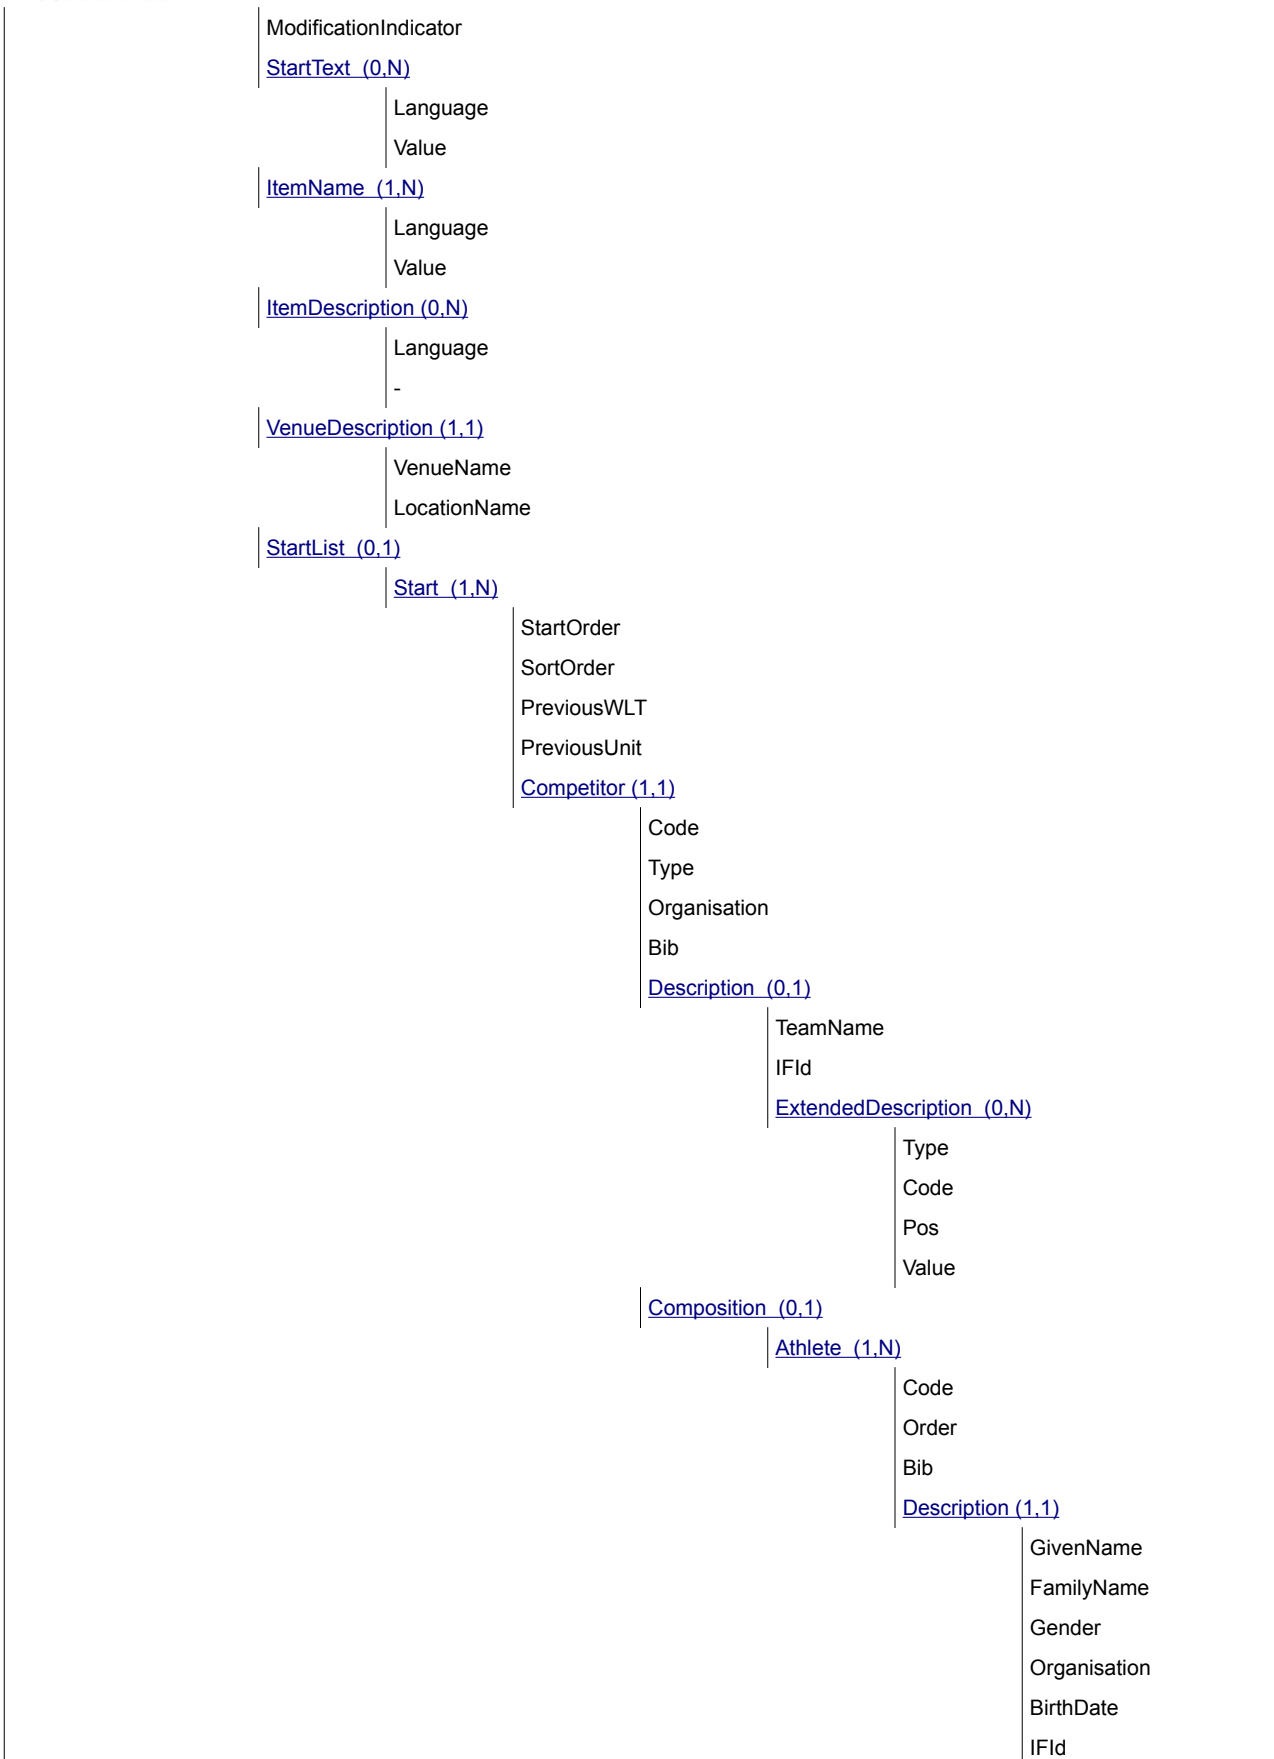

	Class
	Horse
	GuideID
	GuideFamilyName
	GuideGivenName
	<a href="#">ExtendedDescription</a> (0..N)
	Type
	Code
	Pos
	Value

### 2.1.1.5 Message Values

Element Competition (0,1)			
Attribute	M/O	Value	Description
Gen	O	S(20)	Version of the General Data Dictionary applicable to the message
Sport	O	S(20)	Version of the Sport Data Dictionary applicable to the message
Codes	O	S(20)	Version of the Codes applicable to the message

#### Sample (Sample)

<Competition Gen="SOG-2020-1.10" Sport="SOG-2020-DDD-1.10" Codes="SOG-2020-1.20" >

Element Competition /ExtendedInfos /ExtendedInfo (1,N)			
Attribute	M/O	Value	Description
Type	M	See sport specific definition	
Code	M	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Table comment: Attribute to be set Mandatory from Optional or redefined. Refer to the ODF Sport Data Dictionary for each of the disciplines

Element Competition /ExtendedInfos /ExtendedInfo /Extension (0,N)			
Attribute	M/O	Value	Description
Code	M	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element Competition /Session (0,N)			
Attribute	M/O	Value	Description
SessionCode	M	S(10)	Code of the sports competition session which contains this





			event unit. Usually in the format DDD00. DDD is the discipline and 00 is the session number within the discipline. For example ARC02 for the second session in Archery.
StartDate	M	DateTime	Start date. Example: 2006-02-26T10:00:00+01:00
EndDate	M	DateTime	End date. Example: 2006-02-26T10:00:00+01:00
LeadIn	O	m:ss	Amount of time from session start to first scheduled unit.
Venue	M	<a href="#">CC @VenueCode</a>	Venue where the session takes place
VenueName	M	S(25)	Venue Description (not code) from Common Codes
ModificationIndicator	O	S(1)	Attribute is mandatory in the DT_SCHEDULE_UPDATE message. N = New or U = Update.
SessionStatus	O	<a href="#">CC @ScheduleStatus</a>	Only use CANCELLED if applicable. All other sessions are assumed to be scheduled. There is no change to running or finished.
SessionType	O	<a href="#">CC @SessionType</a>	Session type of the Session.
Medal	O	S(1)	Send Y if this session includes at least one unit where a medal (any type of medal) is to be decided. Do not send if no such unit. Intended for use in Beijing 2022.

Element Competition /Session /SessionName (1,N)			
Attribute	M/O	Value	Description
Language	M	<a href="#">CC @Language</a>	Language of the Session Description
Value	M	S(40)	Name of the sports competition session

### Sample (Sample)

```
<Session SessionCode="ATH01" StartDate="2016-08-12T10:00:00+01:00" EndDate="2016-08-12T14:00:00+05:00" LeadIn="5:00" Venue="STA" VenueName="Olympic Stadium" >
  <SessionName Language="ENG" Value="Athletics Session 1" />
</Session>
<Session Code="ATH02" StartDate="2016-08-12T18:00:00+01:00" EndDate="2016-08-12T21:00:00+05:00" LeadIn="5:00" Venue="STA" VenueName="Olympic Stadium" >
  <SessionName Language="ENG" Value="Athletics Session 2" />
</Session>
```

Element Competition /Unit (0,N)			
Attribute	M/O	Value	Description
Code	M	<a href="#">CC @Unit</a>	Full RSC for the unit
PhaseType	M	<a href="#">CC @PhaseType</a>	Phase type for the unit
UnitNum	O	S(15)	Match / Game / Bout / Race Number or similar
ScheduleStatus	M	<a href="#">CC @ScheduleStatus</a>	Unit Status
StartDate	O	DateTime	Start date. This attribute may not be sent when the @ScheduleStatus is UNSCHEDULED. For other statuses the StartDate is expected otherwise ordering is display is incorrert (including CANCELLED and POSTPONED).  This is the scheduled Start date and time and will not be updated when an event unit starts (updated only with RESCHEDULED status)



			<p>Where HideStartDate="Y" then this should be filled with the session start time or the start time of a group of units for all similar units and Order used for sorting. This method is not used in team sports where HideStartDate="Y" is only used temporarily to remove times.</p> <p>Example: 2006-02-26T10:00:00+01:00</p>
HideStartDate	O	S(1)	<p>Send 'Y' if StartDate (scheduled start time) should not be displayed. It may be an estimate or 'fake' time. Do not send if StartDate (scheduled start time) is to be displayed.</p> <p>Start times of some units depend on the finalisation of previous event units and therefore there is no fixed start time in these cases this field is set to 'Y'.</p> <p>When the flag is set to 'Y' then the time is used for sorting purposes but should not be displayed.</p>
EndDate	O	DateTime	<p>End date. This attribute may not be sent when the @ScheduleStatus is UNSCHEDULED, POSTPONED or CANCELLED.</p> <p>Example: 2006-02-26T10:00:00+01:00</p>
HideEndDate	O	S(1)	<p>Send 'Y' if EndDate scheduled end time is not to be displayed.</p> <p>Some event units have a scheduled end time well bounded, however, some event units in some circumstances have a scheduled end time not quite variable (example, some press conferences or tennis matches, etc.) in these cases this field is set to 'Y' and should not be displayed.</p>
ActualStartDate	O	DateTime	<p>This attribute is expected once the event unit has started.</p> <p>Example: 2006-02-26T10:03:22+01:00</p>
ActualEndDate	O	DateTime	<p>This attribute is expected once the event unit has finished.</p> <p>Example: 2006-02-26T12:43:51+01:00</p>
Order	O	Numeric ###0	<p>Order of the units when displayed. This field is considered in two situations:</p> <ol style="list-style-type: none"> <li>1. If HideStartDate = 'Y' then send at least for all Units in an affected session though it is suggested to be sent for all units in a discipline where the concept is used in the discipline.</li> <li>2. If some units start at the same time and a particular order of the units is expected.</li> </ol> <p>It is generally recommended to start at 1 in each session each day though may be ordered independently by location starting at 1 for each location in each session (where the schedule is ordered by location) or using other numbers to ensure the order of two using starting at the same time are displayed in the appropriate order.</p>
Medal	O	<a href="#">SC @UnitMedalType</a>	Indicator of medal awarded for this unit.
Venue	O	<a href="#">CC @VenueCode</a>	Venue where the unit takes place Mandatory unless UNSCHEDULED Can use TBD if the Venue is not known yet (see CC).
Location	O	<a href="#">CC @Location</a>	Location where the unit takes place. Mandatory unless UNSCHEDULED. Can use TBD if the Location is not known yet or a generic code for the discipline (see CC).
MediaAccess	O	S(6)	Only applicable for non-competition. If unit is open to media send "Open", if the unit is closed then send "Closed".
SessionCode	O	S(10)	Code of the sports competition session which contains this event unit. Usually in the format DDD00. DDD is the discipline and 00 is the session number within the discipline. For

			example ARC02 for the second session in Archery. If a unit finishes in a different session (due to interruption) from the starting one then the SessionCode remains the starting code.
ModificationIndicator	O	N, U	Attribute is mandatory in the DT_SCHEDULE_UPDATE message only  N-New event unit U-Update event unit If ModificationIndicator='N', then include new event unit. It will be rarely used as most added units were available in "UNSCHEDULED" status.  If ModificationIndicator="U", then update the event unit.

**Element Competition /Unit /StartText (0,N)**

This element is only used for Competition Schedules when HideStartDate is 'Y'. In this case, English Language is mandatory.

Attribute	M/O	Value	Description
Language	M	<a href="#">CC @Language</a>	Code Language of the @Value
Value	M	S(20) or a code set to be defined discipline by discipline	Text to be displayed in the case that StartDate is not to be displayed (e.g. "After M.1" or "Followed by") Using a code set or fixed text will also be directly displayed and allow end user translation.

Table comment: Attribute to be set Mandatory from Optional or redefined. Refer to the ODF Sport Data Dictionary for each of the disciplines

**Element Competition /Unit /ItemName (1,N)**

Attribute	M/O	Value	Description
Language	M	<a href="#">CC @Language</a>	Code Language of the @Value
Value	M	S(40)	Item Name / Unit Description.  For competition units show the short unit description from common codes which matches the RSC. As in all messages with a description. Only the ENG description is expected.  For non-competition schedules (where the item description is not in common codes) then add the description.

**Element Competition /Unit /ItemDescription (0,N)**

Attribute	M/O	Value	Description
Language	M	<a href="#">CC @Language</a>	Code Language of the @Value
-	M	Free Text	Item Description for non-competition schedule

**Element Competition /Unit /VenueDescription (1,1)**

Attribute	M/O	Value	Description
VenueName	M	S(25)	Venue name in first language. This is the CC value from unit/venue
LocationName	M	S(30)	Location name in first language. This is the CC value from unit/location.

**Element Competition /Unit /StartList /Start (1,N)**



**StartList information is only sent in the case that the Unit type is one of HATH, HCOUP, HNOC or HTEAM and at least one of the competitors are known. (Sent as soon as known for applicable units)**

Attribute	M/O	Value	Description
StartOrder	O	Numeric	Competitor's start order
SortOrder	M	Numeric	Used to sort competitors in an event unit (for example, if there is no StartOrder). It is mainly used for display purposes.
PreviousWLT	O	S(1)	W or L for winner of loser of a particular previous unit plays in this unit. This attribute is only filled if the competitors are 100% confirmed as participating at this time and not subject to change depending on TV times etc. Further, the data is removed when the real teams are known.
PreviousUnit	O	<a href="#">CC @Unit</a>	The full RSC of the unit where this competitor came from. This attribute is only filled if the competitors are 100% confirmed as participating at this time and not subject to change depending on TV times etc. Further, the data is removed when the real teams are known.

**Element Competition /Unit /StartList /Start /Competitor (1,1)**

Attribute	M/O	Value	Description
Code	M	S(20) with no leading zeroes or SC @CompetitorPlace.	Competitor's ID or another indicator (SC @CompetitorPlace) which may include possible options of: TBD in case that the competitor is unknown at this time but will be available NOCOMP is sent when there is no competitor (and will not come later) BYE is used when there is a scheduled match of BYE.
Type	M	S(1)	A for athlete, T for team
Organisation	O	<a href="#">CC @Organisation</a>	Should be sent when known
Bib	O	Same as in the Start List message for each discipline	Team bib number (if Competitor @Type="T")

**Element Competition /Unit /StartList /Start /Competitor /Description (0,1)**

Attribute	M/O	Value	Description
TeamName	M	S(73)	Team Name where known, must send when available
IFId	O	S(16)	Team IF number, send if available

**Element Competition /Unit /StartList /Start /Competitor /Description /ExtendedDescription (0,N)**

Attribute	M/O	Value	Description
Type	M	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

**Element Competition /Unit /StartList /Start /Competitor /Composition /Athlete (1,N)**

**Only send in the case that the Unit type is one of HATH (AR, BD, TE etc) or HCOUP (BD, TE etc),**

**In case of the Competitor @Code='TBD' the Competitor element should not be sent.**

Attribute	M/O	Value	Description
Code	M	S(20) with no leading zeroes	Athlete's ID, corresponding to either a team member or an individual athlete in the event unit.



Order	M	Numeric	Order attribute used to sort team members in a team (if Competitor @Type="T") or 1 if Competitor @Type="A".
Bib	O	Same as in the Start List message for each discipline	Individual athlete's bib number (if Competitor @Type="A") or team member's bib number (if Competitor @Type="T").

Element Competition /Unit /StartList /Start /Competitor /Composition /Athlete /Description (1,1)			
Attribute	M/O	Value	Description
GivenName	O	S(25)	Given name in WNPA format (mixed case). Send if not null.
FamilyName	M	S(25)	Family name in WNPA format (mixed case)
Gender	M	<a href="#">CC @PersonGender</a>	Participant's gender
Organisation	M	<a href="#">CC @Organisation</a>	Organisation ID
BirthDate	O	YYYY-MM-DD	Date of birth.
IFId	O	S(16)	Athlete IF number, send if available, only for the current discipline.
Class	O	CC @DisplineClass	Code to identify the sport class in the case of events with athletes with a disability (e.g: Paralympic Games).  This attribute is optional because it is not used in events without such athletes.
Horse	O	S(25)	Name of the athlete's horse
GuideID	O	S(20) without leading zeros	ID of the Guide, used for some athletes with a disability (e.g: Paralympic Games).
GuideFamilyName	O	S(25)	Family Name of the athlete's guide (mixed case). Used for some athletes with a disability (e.g: Paralympic Games).
GuideGivenName	O	S(25)	Given Name of the athlete's guide (mixed case). Used for some athletes with a disability (e.g: Paralympic Games).

Element Competition /Unit /StartList /Start /Competitor /Composition /Athlete /Description /ExtendedDescription (0,N)			
Attribute	M/O	Value	Description
Type	M	See sport specific definition	
Code	M	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

### Sample (Team Head to Head)



```
<Unit Code="BKBMTTEAM5-----GPA-0001----" PhaseType="3" UnitNum="11"
ScheduleStatus="SCHEDULED" StartDate="2016-08-12T15:00:00+05:00" EndDate="2016-08-
12T17:00:00+05:00" Medal="1" Venue="NGA" Location="BK2" SessionCode="BKB01" >
  <ItemName Language="ENG" Value="Men's Preliminary Round Pool A"/>
  <VenueDescription VenueName="Green Arena" LocationName="Green Arena"/>
  <StartList>
    <Start SortOrder="1" StartOrder="1">
      <Competitor Code="BKBMTTEAM5---CZE01" Type="T" Organisation="CZE">
        <Description TeamName="Czech Republic" />
      </Competitor>
    </Start>
    <Start SortOrder="2" StartOrder="2">
      <Competitor Code="BKBMTTEAM5---USA01" Type="T" Organisation="USA">
        <Description TeamName="United States" />
      </Competitor>
    </Start>
  </StartList>
</Unit>
```

### Sample (Individual Head to Head)

```
<Unit Code="TENMSINGLES-----FNL-0001----" PhaseType="3" UnitNum="11"
ScheduleStatus="SCHEDULED" StartDate="2016-08-05T13:00:00+05:00" HideStartDate="Y"
EndDate="2016-08-05T13:30:00+05:00" HideEndDate="Y" Medal="1" Venue="WEM" Location="TE0"
SessionCode="TEN12" >
  <StartText Language="ENG" Value="followed by"/>
  <ItemName Language="ENG" Value="Men's Singles Gold Medal Match"/>
  <VenueDescription VenueName="Wimbledon" LocationName="Centre Court"/>
  <StartList>
    <Start SortOrder="1" StartOrder="1">
      <Competitor Code="1051631" Type="A" Organisation="BLR">
        <Composition>
          <Athlete Code="1051631" Order="1">
            <Description GivenName="Barry" FamilyName="Smith" Gender="M" Organisation="BLR"
            BirthDate="1983-07-23" IFId="397806" />
          </Athlete>
        </Composition>
      </Competitor>
    </Start>
    <Start SortOrder="2" StartOrder="2">
      <Competitor Code="1131104" Type="A" Organisation="USA">
        <Composition>
          <Athlete Code="1131104" Order="1">
            <Description GivenName="Bobby" FamilyName="Jones" Gender="M" Organisation="USA"
            BirthDate="1969-10-23" IFId="573006" />
          </Athlete>
        </Composition>
      </Competitor>
    </Start>
  </StartList>
</Unit>
```

### Sample (Non Head to Head)





```
<Unit Code="ATHM100M-----FNL-0001----" PhaseType="3"  
ScheduleStatus="SCHEDULED" StartDate="2016-08-12T15:00:00+05:00" EndDate="2016-08-  
12T17:00:00+05:00" Medal="1" Venue="NGA" Location="BK2" SessionCode="ATH12" >  
  <ItemName Language="ENG" Value="Men's 100m Final"/>  
  <VenueDescription VenueName="Olympic Stadium" LocationName="Olympic Stadium"/>  
</Unit>
```

### 2.1.1.6 Message Sort

Sort by Session @SessionCode.

The message is sorted by Unit@StartDate then by Unit@Order then Unit@Code.

In case of event unit with no Unit@StartDate defined (example, they are in an event unit status such as UNSCHEDULED), they will be listed at the end in Unit@Code order.

## 2.1.2 List of participants by discipline / List of participants by discipline update

### 2.1.2.1 Description

A participant is considered to be any individual (type athlete, participating or not in the current games) or any official in one or several disciplines or a competitor being part of a team (team member).

Although the participant may participate in more than one event or more than one discipline, this message just contains the information for the discipline of the message, listing the information of all the events for that discipline.

This message includes historical athletes that do not participate in the current competition. Historical athletes will not be registered to any event.

It is important to note that all the sport messages that make references to athletes (event unit start list and results, phase results, medallists etc.) will always match the athlete ID with the athlete ID in this message. The historical athletes will be used to match historical athlete information as it appears in the records message when sending the previous record information and this previous record was an historical record not being broken in the current competition.

List of participants by discipline (DT\_PARTIC) is a bulk message, provided for each discipline. It is a complete participant information message for one particular discipline. The arrival of this message resets all the previous participants' information for one particular discipline. This message includes a list of current athletes, officials, coaches, guides, technical officials, reserves and historical athletes regardless of their status.

List of participants by discipline update (DT\_PARTIC\_UPDATE) is an update message. It is not a complete list of participants' information by discipline message, only the participant data being modified, i.e. if some data of one participant changes, the element Participant for it with all its children and attributes must be sent.

The key of the information updated consists of the following attribute: Participant @Code. Therefore, any new or updated Participant Discipline-Event will be identified by all these attributes.

### 2.1.2.2 Header Values

The following table describes the message header attributes.

Attribute	Value	Comment
CompetitionCode	<a href="#">CC @Competition</a>	Unique ID for competition
DocumentCode	<a href="#">CC @Discipline</a>	Full RSC at the discipline level
DocumentType	DT_PARTIC DT_PARTIC_UPDATE	/ List of participants by discipline message
Version	1..V	Version number associated to the message's content. Ascendant number
FeedFlag	"P"-Production "T"-Test	Test message or production message.
Date	Date	Date when the message is generated, expressed in the local time zone where the message was produced.
Time	Time	Time up to milliseconds when the message is generated, expressed in



		the local time zone where the message was produced.
LogicalDate	Date	Logical Date of events. This is the same as the physical day except when the unit or message transmission extends after midnight. See full explanation in ODF Foundation.
Source	<a href="#">SC.@Source</a>	Code indicating the system which generated the message.

### 2.1.2.3 Trigger and Frequency

The DT\_PARTIC message is sent as a bulk message prior to the Games. It is sent several times up to the date of transfer of control to OVR after which only DT\_PARTIC\_UPDATE messages are sent.

The DT\_PARTIC\_UPDATE message is triggered when there is a modification in the data for any individual after the transfer of control to OVR.

### 2.1.2.4 Message Structure

The following table defines the structure of the message.

Level 1	Level 2	Level 3	Level 4	Level 5	Level 6
<a href="#">Competition (0.1)</a>	Gen Sport Codes				
	<a href="#">Participant (1.N)</a>	Code Parent Status GivenName FamilyName PassportGivenName PassportFamilyName PrintName PrintInitialName TVName TVInitialName TVFamilyName LocalFamilyName LocalGivenName Gender Organisation BirthDate Height Weight PlaceofBirth CountryofBirth PlaceofResidence CountryofResidence Nationality			



### 2.1.2.5 Message Values

Element Competition (0,1)			
Attribute	M/O	Value	Description
Gen	O	S(20)	Version of the General Data Dictionary applicable to the message
Sport	O	S(20)	Version of the Sport Data Dictionary applicable to the message
Codes	O	S(20)	Version of the Codes applicable to the message

#### Sample (Versions)

<Competition Gen="SOG-2020-1.10" Sport="SOG-2020-DDD-1.10" Codes="SOG-2020-1.20" >

Element Participant (1,N)			
Attribute	M/O	Value	Description
Code	M	S(20) with no leading zeroes	Participant's ID. It identifies an athlete or an official and the holding participant's valid information for one particular period of time.



			<p>It is used to link other messages to the participant's information.</p> <p>Participant's information (example @Organisation) will not be the latest for the athlete/official, unless the @Code attribute is the same as the @Parent attribute. However, this information could be the one being valid in the particular moment of a start list, event unit results, etc.</p> <p>When the participant is an historical one, then this ID will start with "A" when it is an Athlete, "C" when Coach and "O" when Official.</p>
Parent	M	S(20) with no leading zeroes	<p>Participant's parent ID, which is used to link to the latest valid information for one participant. @Parent attribute should be linked to the latest participant's information, by retrieving that Athlete/Official whose @Code attribute is the same as @Parent.</p> <p>The participant containing @Code attribute being the same as the @Parent attribute will be the one with the latest information for the participant.</p> <p>The @Parent attribute will only be different from @Code in the case that critical personal information has changed from previous competitions. The typical examples are Organisation (for change of country) or Name (particularly for women changing their name at marriage). Further to be clear, @Parent and @Code can only be different if Current = "false".</p>
Status	O	<a href="#">CC @ParticStatus</a>	<p>Participant's accreditation status this attribute is Mandatory in the case of @Current="true" and it is optional in the case that @Current="false".</p> <p>To delete a participant, a specific value of the Status attribute is used.</p>
GivenName	O	S(25)	Given name in WNPA format (mixed case)
FamilyName	M	S(25)	Family name in WNPA format (mixed case)
PassportGivenName	O	S(25)	Passport Given Name (Uppercase).
PassportFamilyName	O	S(25)	Passport Family Name (Uppercase).
PrintName	M	S(35)	Print name (family name in upper case + given name in mixed case)
PrintInitialName	M	S(18)	Print Initial name (for the given name it is sent just the initial, without dot)
TVName	M	S(35)	TV name
TVInitialName	M	S(18)	TV initial name
TVFamilyName	M	S(25)	TV family name
LocalFamilyName	O	S(25)	Family name in the local language in the appropriate case for the local language (usually mixed case)
LocalGivenName	O	S(25)	Given name in the local language in the appropriate case for the local language (usually mixed case)
Gender	M	<a href="#">CC @PersonGender</a>	Participant's gender
Organisation	M	<a href="#">CC @Organisation</a>	Organisation ID
BirthDate	O	YYYY-MM-DD	Date of birth. This information may not be known at the very beginning, but it will be completed for all participants after successive updates
Height	O	S(3)	Height in centimetres. It will be included if this information is available. This information is not needed in the case of officials/referees. "." may be used where the data is not available.
Weight	O	S(3)	Weight in kilograms. It will be included if this information is available. This information is not needed in the case of officials/referees.



			Do not send attribute if data not available.
PlaceofBirth	O	S(75)	Place of Birth
CountryofBirth	O	<a href="#">CC @Country</a>	Country ID of Birth
PlaceofResidence	O	S(75)	Place of Residence
CountryofResidence	O	<a href="#">CC @Country</a>	Country ID of Residence
Nationality	O	<a href="#">CC @Country</a>	Participant's nationality.  Although this attribute is optional, in very exceptional situations it will not be known, and for this reason not ready to be sent.
MainFunctionId	O	<a href="#">CC @ResultsFunction</a>	Main function  In the Case of Current="true" this attribute is Mandatory.
Current	M	boolean	It defines if a participant is participating in the games (true) or is a Historical participant (false).
OlympicSolidarity	O	S(1)	Send Y if the participant is a member of the Solidarity / Scholarship Program else not sent.
ModificationIndicator	M	S(1)	'N' or 'U' Attribute is mandatory in the DT_PARTIC_UPDATE message only  N-New participant (in the case that this information comes as a late entry) U-Update participant  If ModificationIndicator='N', then include new participant to the previous bulk-loaded list of participants  If ModificationIndicator='U', then update the participant to the previous bulk-loaded list of participants  To delete a participant, a specific value of the Status attribute is used.

**Element Participant /Discipline (1,1)**

All participating athletes will be assigned at least one discipline, it could be more. Each accredited official will be assigned at least one discipline, but it could be more. If an athlete or official is assigned to more than one discipline, it will be included in the participant message of both disciplines.

Attribute	M/O	Value	Description
Code	M	<a href="#">CC @Discipline</a>	Full RSC of the Discipline. It is the discipline code used to fill the OdfBody @DocumentCode attribute.
IFId	O	S(16)	IF ID (competitor's federation number for the discipline if it is assigned).

**Element Participant /Discipline /DisciplineEntry (0,N)**

Send if there is specific discipline information.

Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

**Element Participant /Discipline /RegisteredEvent (0,N)**

All accredited athletes will be assigned to one or more events. There is one exception: in some sports, substitutes may be accredited without any associated event. Historical athletes are not registered to any event.



Attribute	M/O	Value	Description
Event	M	<a href="#">CC @Event</a>	Full RSC of the Event
Bib	O	See table comment	Bib number.  Bib number is in fact a special Event Entry. However, since it is very meaningful in the sports that make use of this attribute, it has been considered as an attribute, although it was part of EventEntry in the previous versions.  Send only in the Case of Current="true".
Class	O	CC @DisciplineClass	Code to identify the handicap class in the case of events with handicapped athletes (e.g: paralympic games).  This attribute is optional because is not used in other type of events without handicapped athletes. Send only in the Case of Current="true".
Status	O	See table comment	Participant status in the event
Substitute	O	See table comment	Substitute information. By default send "Y" if substitute else do not send but can vary by discipline.

Table comment: Attribute to be set Mandatory from Optional or redefined. Refer to the ODF Sport Data Dictionary for each of the disciplines

Element Participant /Discipline /RegisteredEvent /EventEntry (0,N)			
Send if there are specific athlete's event entries.			
Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element Participant /OfficialFunction (0,N)			
Send if the official has optional functions. Do not send, otherwise.			
Attribute	M/O	Value	Description
FunctionId	M	<a href="#">CC @ResultsFunction</a>	Additional officials' function code

### 2.1.2.6 Message Sort

The message is sorted by Participant @Code

## 2.1.3 List of teams / List of teams update

### 2.1.3.1 Description

DT\_PARTIC\_TEAMS contains the list of teams related to the current competition.

A team is a type of competitor, being a group of two or more individual athletes participating together in one event. Pairs (tennis, figure skating, etc.) are also defined as team of two competitors. One team participates in one event of one discipline. When one team participates in multiple events, there will be one team for each event for the same group. Also when the same organisation participates in the same event twice, there will be different teams.

A historical team is defined as a group of athletes (team members) competing in the past in a competition event for an organisation. The historical team members appearing in this message will be listed in the list of historical athletes' messages. The list of historical teams just associates historical team members with the corresponding historical teams. Historical teams will not be registered to any event.

For equestrian one athlete and one horse are not considered a team, the horse is an attribute of the athlete.

List of teams (DT\_PARTIC\_TEAMS) is a bulk message by discipline. The list is always complete. The arrival of this message resets all the previous participant teams' information for that discipline. It is assumed that all teams appearing in this list are valid, in the meaning that they are participating or they could participate in one event.

List of teams update (DT\_PARTIC\_TEAMS\_UPDATE) is an update message. It is not a complete list of teams' information message. It only contains the data of a team being modified.

### 2.1.3.2 Header Values

The following table describes the message header attributes.

Attribute	Value	Comment
CompetitionCode	<a href="#">CC @Competition</a>	Unique ID for competition
DocumentCode	<a href="#">CC @Discipline</a>	Full RSC at the discipline level
DocumentType	DT_PARTIC_TEAMS / DT_PARTIC_TEAMS_UPDATE	List of participant teams message
Version	1..V	Version number associated to the message's content. Ascendant number
FeedFlag	"P"-Production "T"-Test	Test message or production message.
Date	Date	Date when the message is generated, expressed in the local time zone where the message was produced.
Time	Time	Time up to milliseconds when the message is generated, expressed in the local time zone where the message was produced.
LogicalDate	Date	Logical Date of events. This is the same as the physical day except when the unit or message transmission extends after midnight. See full explanation in ODF Foundation.
Source	<a href="#">SC @Source</a>	Code indicating the system which generated the message.





### 2.1.3.3 Trigger and Frequency


The DT\_PARTIC\_TEAMS message is sent as a bulk message before the Games. It is sent several times up to the date of transfer of control to OVR after which only DT\_PARTIC\_TEAMS\_UPDATE messages are sent.

The DT\_PARTIC\_TEAMS\_UPDATE message is triggered when there is a modification in the data for any team after the transfer of control to OVR.

### 2.1.3.4 Message Structure

The following table defines the structure of the message.

Level 1	Level 2	Level 3	Level 4	Level 5	Level 6	Level 7
<a href="#">Competition (0,1)</a>						
	Gen					
	Sport					
	Codes					
	<a href="#">Team (1,N)</a>					
		Code				
		Organisation				
		Number				
		Name				
		ShortName				
		TVTeamName				
		Gender				
		Current				
		TeamType				
		ModificationIndicator				
		<a href="#">Composition (0,1)</a>				
			<a href="#">Athlete (0,N)</a>			
				Code		
				Order		
			<a href="#">Team (0,N)</a>			
				Code		
				Number		
				Name		
				Gender		
				IFld		
				<a href="#">Composition (0,1)</a>		
					<a href="#">Athlete (1,N)</a>	
						Code
						Order
				<a href="#">RegisteredEvent (0,1)</a>		
					Event	
					<a href="#">EventEntry (0,N)</a>	
						Type
						Code

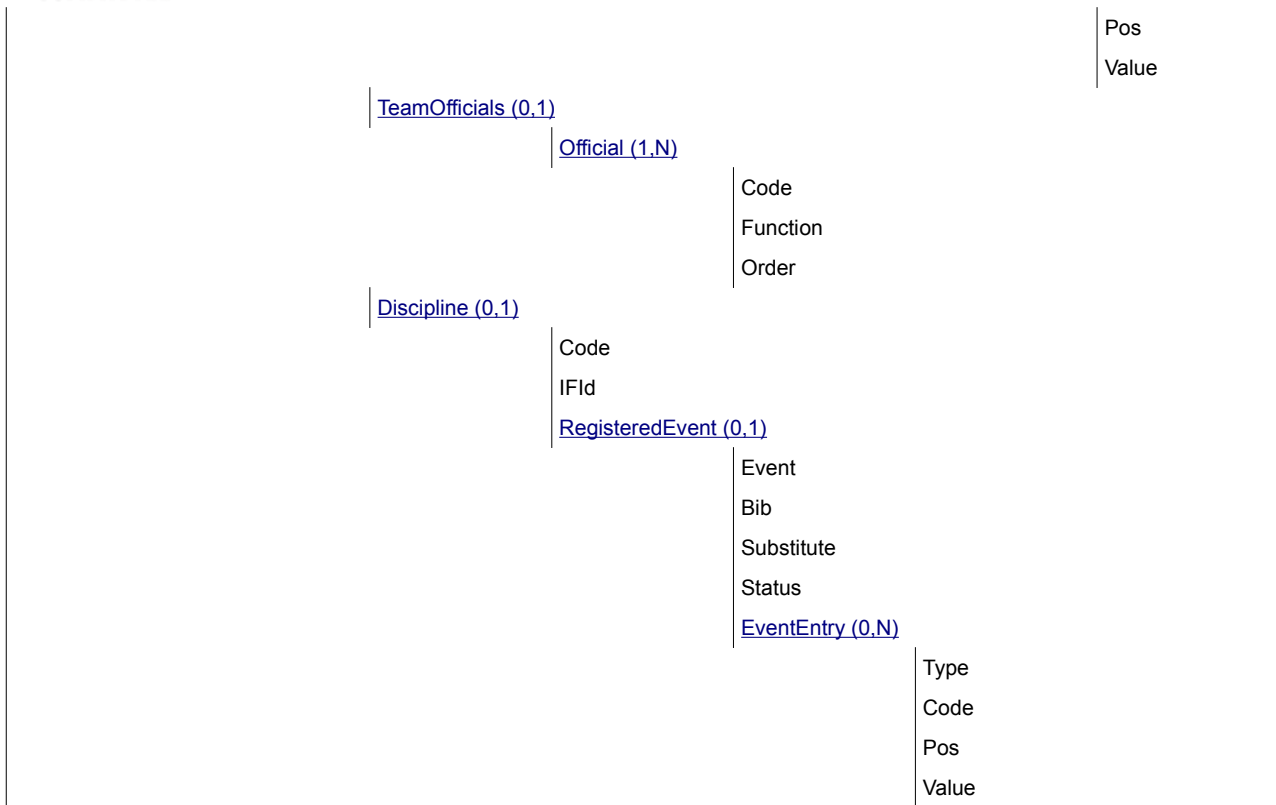

### 2.1.3.5 Message Values

Element Competition (0,1)			
Attribute	M/O	Value	Description
Gen	O	S(20)	Version of the General Data Dictionary applicable to the message
Sport	O	S(20)	Version of the Sport Data Dictionary applicable to the message
Codes	O	S(20)	Version of the Codes applicable to the message

Element Team (1,N)			
Attribute	M/O	Value	Description
Code	M	S(20) with no leading zeroes	Team's ID (example ATHM4X400M--ESP01, 393553) When the Team is an historical one, then this ID starts with "T".
Organisation	M	<a href="#">CC_@Organisation</a>	Team organisation's ID
Number	O	Numeric #0	Team's number.  If there is not more than one team for one organisation participating in one event, it is 1. Otherwise, it will be incremental, 1 for the first organisation's team, 2 for the second organisation's team, etc.  Required in the case of current teams.
Name	M	S(73)	Team name
ShortName	O	S(40)	Team Short Name ** MANDATORY IN BEIJING **
TVTeamName	M	S(21)	TV Team Name



Gender	M	CC @SportGender	Gender Code of the Team
Current	M	boolean	It defines if a team is participating in the games (true) or it is a Historical team (false)
TeamType	O	SC @TeamType	Send the team type. This is how the name is constructed to allow clients to build in other languages. ** MANDATORY IN BEIJING **
ModificationIndicator	M	N, U, D	Attribute is mandatory in the DT_PARTIC_TEAMS_UPDATE message only  N-New team (in the case that this information comes as a late entry) U-Update team D-Delete team  If ModificationIndicator='N', then include new team to the previous bulk-loaded list of teams  If ModificationIndicator='U', then update the team to the previous bulk-loaded list of teams  If ModificationIndicator='D', then delete the team to the previous bulk-loaded list of teams

**Element Team /Composition /Athlete (0,N)**

In the case of current teams the number of athletes is 2 or more.

Attribute	M/O	Value	Description
Code	M	S(20) with no leading zeroes	Athlete's ID of the listed team's member.  Therefore, he/she makes part of the team's composition.
Order	O	Numeric	Team member order

**Element Team /Composition /Team (0,N)**

Table comment: Attribute to be set Mandatory from Optional or redefined. Refer to the ODF Sport Data Dictionary for each of the disciplines

Attribute	M/O	Value	Description
Code	M	S(20) with no leading zeroes	Team's ID (example ATHM4X400m--ESP01, 393553) When the Team is an historical one, then this ID starts with "T".
Number	M	Numeric #0	Team's number. Incremental number for each team within the team.
Name	O	S(73)	Team's name. It will apply to some of the disciplines. If there is not any special rule for that discipline, send the Description of the code CC@Organisation.
Gender	M	<a href="#">CC @DisciplineGender</a>	Discipline Gender Code of the Team
IFld	O	S(16)	Federation number for the corresponding discipline (include if the discipline assigns international federation codes to teams)

**Element Team /Composition /Team /Composition /Athlete (1,N)**

Attribute	M/O	Value	Description
Code	M	S(20) with no leading zeroes	Athlete's ID of the listed team's member. Therefore, he/she is part of the team's composition.
Order	O	Numeric	Team member order



<b>Element Team /Composition /Team /RegisteredEvent (0,1)</b>			
<b>Each current team is assigned to one event. Historical teams will not be registered to any event.</b>			
<b>Attribute</b>	<b>M/O</b>	<b>Value</b>	<b>Description</b>
Event	M	<a href="#">CC @Unit</a>	Full RSC of the subevent

<b>Element Team /Composition /Team /RegisteredEvent /EventEntry (0,N)</b>			
<b>Send if there are specific team's event entries.</b>			
<b>Attribute</b>	<b>M/O</b>	<b>Value</b>	<b>Description</b>
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

<b>Element Team /TeamOfficials /Official (1,N)</b>			
<b>Send if there are specific officials for the team. Does not apply to historical teams.</b>			
<b>Attribute</b>	<b>M/O</b>	<b>Value</b>	<b>Description</b>
Code	M	S(20) with no leading zeroes	Official's ID of the listed team's official. Therefore, he/she makes part of the team's officials.
Function	M	<a href="#">CC @ResultsFunction</a>	Official's function for the team.
Order	O	Numeric #0	Official's order in the team.

<b>Element Team /Discipline (0,1)</b>			
<b>Each team is assigned just to one discipline. Discipline is expected unless ModificationIndicator="D"</b>			
<b>Attribute</b>	<b>M/O</b>	<b>Value</b>	<b>Description</b>
Code	M	<a href="#">CC @Discipline</a>	Full RSC of the Discipline
IFld	O	S(16)	Federation number for the corresponding discipline (include if the discipline assigns international federation codes to teams)

<b>Element Team /Discipline /RegisteredEvent (0,1)</b>			
<b>Each current team is assigned to one event. Historical teams will not be registered to any event.</b>			
<b>Attribute</b>	<b>M/O</b>	<b>Value</b>	<b>Description</b>
Event	M	<a href="#">CC @Event</a>	Full RSC of the Event
Bib	O	See table comment	Bib number.
Substitute	O	See table comment	Substitute information. By default send "Y" if substitute else do not send but can vary by discipline.
Status	O	See table comment	Team status in the event

Table comment: Attribute to be set Mandatory from Optional or redefined. Refer to the ODF Sport Data Dictionary for each of the disciplines

<b>Element Team /Discipline /RegisteredEvent /EventEntry (0,N)</b>			
<b>Send if there are specific team's event entries.</b>			
<b>Attribute</b>	<b>M/O</b>	<b>Value</b>	<b>Description</b>
Type	O	See sport specific definition	
Code	O	See sport specific definition	



Pos	O	See sport specific definition	
Value	O	See sport specific definition	

### **2.1.3.6 Message Sort**

The message is sorted by Team @Code.

## 2.1.4 List of horses / List of horses update

### 2.1.4.1 Description

The List of horses is a bulk message containing a complete list of horses and provided only for equestrian (not for the horses in modern pentathlon). The arrival of this message resets all the previous equestrian horses' information.

List of horses update (DT\_PARTIC\_HORSES\_UPDATE) is not a complete list, it only contains the data that has been modified and it is available for both equestrian and modern pentathlon.

The key of the information updated consists of the following attribute: Horse @Code. Therefore, any new or updated Horse will be identified by all these attributes.

### 2.1.4.2 Header Values

The following table describes the message header attributes.

Attribute	Value	Comment
CompetitionCode	<a href="#">CC @Competition</a>	Unique ID for competition
DocumentCode	<a href="#">CC @Discipline</a>	Full RSC at the discipline level
DocumentType	DT_PARTIC_HORSES_UPDAT E / DT_PARTIC_HORSES	List of horses message
Version	1..V	Version number associated to the message's content. Ascendant number
FeedFlag	"P"-Production "T"-Test	Test message or production message.
Date	Date	Date when the message is generated, expressed in the local time zone where the message was produced.
Time	Time	Time up to milliseconds when the message is generated, expressed in the local time zone where the message was produced.
LogicalDate	Date	Logical Date of events. This is the same as the physical day except when the unit or message transmission extends after midnight. See full explanation in ODF Foundation.
Source	<a href="#">SC @Source</a>	Code indicating the system which generated the message.

### 2.1.4.3 Trigger and Frequency

The DT\_PARTIC\_HORSES message is sent as a bulk message approximately one month before the Games. It is sent several times up to the date of transfer of control to OVR after which only DT\_PARTIC\_HORSES\_UPDATE messages are sent.

The DT\_PARTIC\_HORSES\_UPDATE message is triggered when there is a modification in the data for any horse after the transfer of control to OVR.

### 2.1.4.4 Message Structure

The following table defines the structure of the message.

Level 1	Level 2	Level 3	Level 4
<a href="#">Competition (0.1)</a>			
	Gen		
	Sport		



	Codes		
	<a href="#">Horse (1,N)</a>		
		Code	
		Name	
		Organisation	
		Sex	
		YearBirth	
		Passport	
		ColourCode	
		BreedCode	
		Sire	
		Owner	
		SecondOwner	
		Groom	
		ModificationIndicator	
		<a href="#">Entry (0,N)</a>	
			Type
			Code
			Pos
			Value

### 2.1.4.5 Message Values

Element Competition (0,1)			
Attribute	M/O	Value	Description
Gen	O	S(20)	Version of the General Data Dictionary applicable to the message
Sport	O	S(20)	Version of the Sport Data Dictionary applicable to the message
Codes	O	S(20)	Version of the Codes applicable to the message

Element Horse (1,N)			
Attribute	M/O	Value	Description
Code	M	S(20) with no leading zeroes	Horse's ID
Name	M	S(25)	Horse's name in upper case.
Organisation	O	<a href="#">CC @Organisation</a>	Horse's organisation. It's mandatory except for the message List of Horses Update of Modern Pentathlon.
Sex	O	<a href="#">CC @HorseSex</a>	Horse's sex. Send when information is available
YearBirth	O	Numeric ####	Horse's year of birth. Send when information is available
Passport	O	S(12)	Horse's passport. Send if the information is available
ColourCode	O	<a href="#">CC @HorseColour</a>	Horse's colour code. Send when information is available
BreedCode	O	<a href="#">CC @HorseBreed</a>	Horse's breed code. Send when information is available
Sire	O	S(25)	Horse's sire. Send when information is available. The content is expected in upper case.
Owner	O	S(35)	Horse's primary (first) owner. Send when information is



			available. The content is expected in upper case.
SecondOwner	O	S(35)	Horse's secondary owner. Send when available. The content is expected in upper case.
Groom	O	S(35)	Horse's groom. Send when information is available. The content is expected in upper case.
ModificationIndicator	M	N, U, D	Attribute is mandatory in the DT_PARTIC_HORSES_UPDATE message only  N - New horse (any horse but particularly for modern pentathlon when it is sent the first time) U - Update horse D - Delete horse  If ModificationIndicator='N', then adds the new horse to the previous bulk-loaded list of horses  If ModificationIndicator='U', then updates the horse information to the existing one  If ModificationIndicator='D', then deletes the horse

**Element Horse /Entry (0,N)**

**Only when there are entries specific for the horse.**

Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

**2.1.4.6 Message Sort**

The message will be sorted by Horse @Code



## 2.1.5 Event Unit Start List and Results

### 2.1.5.1 Description

The Event Unit Start List and Results is a message containing both the start list and results information of the competitors in one (individual or team) event unit.

The Event Unit Start List and Results is a mandatory message for all sports. The definition includes as much generic information as possible due to the fact that each discipline and event has its own format for the results information (example: score of a match, time in a race, distance in a throw...).

This is always a full message and all applicable elements and attributes are always sent.

### 2.1.5.2 Header Values

The following table describes the message header attributes.

Attribute	Value	Comment
CompetitionCode	<a href="#">CC @Competition</a>	Unique ID for competition
DocumentCode	Full RSC	Each ODF Sport Data Dictionary will have to update the definition of this attribute
DocumentSubcode	To be defined in each ODF Data Dictionary	Provides greater granularity for document if DocumentCode is not sufficient.
DocumentType	DT_RESULT	Event Unit Start List and Results message
DocumentSubtype	S(20) To be defined in each ODF Data Dictionary	Attribute used to extend DocumentType for some messages. Optional attribute only for special cases in result messages.
Version	1..V	Version number associated to the message's content. Ascendant number
ResultStatus	<a href="#">SC @ResultStatus</a>	It indicates whether the result is official or unofficial (or intermediate etc). START_LIST OFFICIAL UNOFFICIAL PARTIAL (used after competition is started and is not finished, but some results are already known and will not change, other results are missing due to athletes still competing) INTERMEDIATE (used after the competition has started and is not finished but not currently live) LIVE (used during the competition when nothing else applies). UNCONFIRMED (used after the competition is completed and before either UNOFFICIAL or OFFICIAL. It may be sent multiple times if modifications are required and the status has not changed)  Note: For the use of UNCONFIRMED / UNOFFICIAL / OFFICIAL there will be variations defined in the sport data dictionaries as some statuses may not apply in some sports. PROTESTED
FeedFlag	"P"-Production "T"-Test	Test message or production message.
Date	Date	Date when the message is generated, expressed in the local time zone where the message was produced.
Time	Time	Time up to milliseconds when the message is generated, expressed in the local time zone where the message was produced.
LogicalDate	Date	Logical Date of events. This is the same as the physical day except when the unit or message transmission extends after midnight. See full explanation in ODF Foundation.
Source	<a href="#">SC @Source</a>	Code indicating the system which generated the message.

### 2.1.5.3 Trigger and Frequency

This message is sent with ResultStatus 'START\_LIST' as soon as the expected information is available and any changes to the information. Possible information is:

- \* Event Unit related information like ExtendedInfos and Officials
- \* Event Unit competitors
- \* Addition of IRMs prior to the start of the unit

This message is then sent with ResultStatus 'LIVE' as soon as the unit starts and continues to be triggered on all updates. The message is also sent with ResultStatus 'UNCONFIRMED' when the competition finishes. In relation to the above mentioned ResultStatuses, the following generic rules apply:

- \* Use UNCONFIRMED when the action in FOP is finished but still some data need to be entered or photo finish needs to be evaluated or UNOFFICIAL/OFFICIAL cannot be used for some other specific reason;
- \* Use UNOFFICIAL once all data has been captured or this status has a particular meaning in a sport;
- \* Use OFFICIAL as soon as results are approved by the competition authority
  
- \* The purpose of UNCONFIRMED is to send out results as soon as competition is over without any delay due to competition procedures
- \* The purpose of UNOFFICIAL is to notify that all results have been captured but approval is still pending. Use of UNOFFICIAL should be minimised. New version of UNOFFICIAL results should be expected in case of disqualification or any sanction which is the outcome of detailed review against competition rules
- \* The purpose of OFFICIAL is to notify that results data has been validated by competition authorities. A new version of OFFICIAL results should be expected in case of corrections of results data after official approval due to any reason.

This message also must be triggered immediately after a DT\_CONFIG message is sent for the same unit if a DT\_RESULT was previously distributed.

This message is also sent when the event unit finishes and the results are still unofficial. Also, this message is expected when the results become official. The official/unofficial status is included in the ODF headers (ResultStatus attribute). The message is sent as 'INTERMEDIATE' during extended breaks (including unplanned due to weather conditions etc).


Trigger also after any change.


If there is any kind of sport specific rule, this can be overwritten in the corresponding ODF Sport Data Dictionaries.


### 2.1.5.4 Message Structure

The following table defines the structure of the message.

Level 1	Level 2	Level 3	Level 4	Level 5	Level 6	Level 7	Level 8	Level 9	Level 10	Level 11
<a href="#">Competition (0.1)</a>										
	Gen									

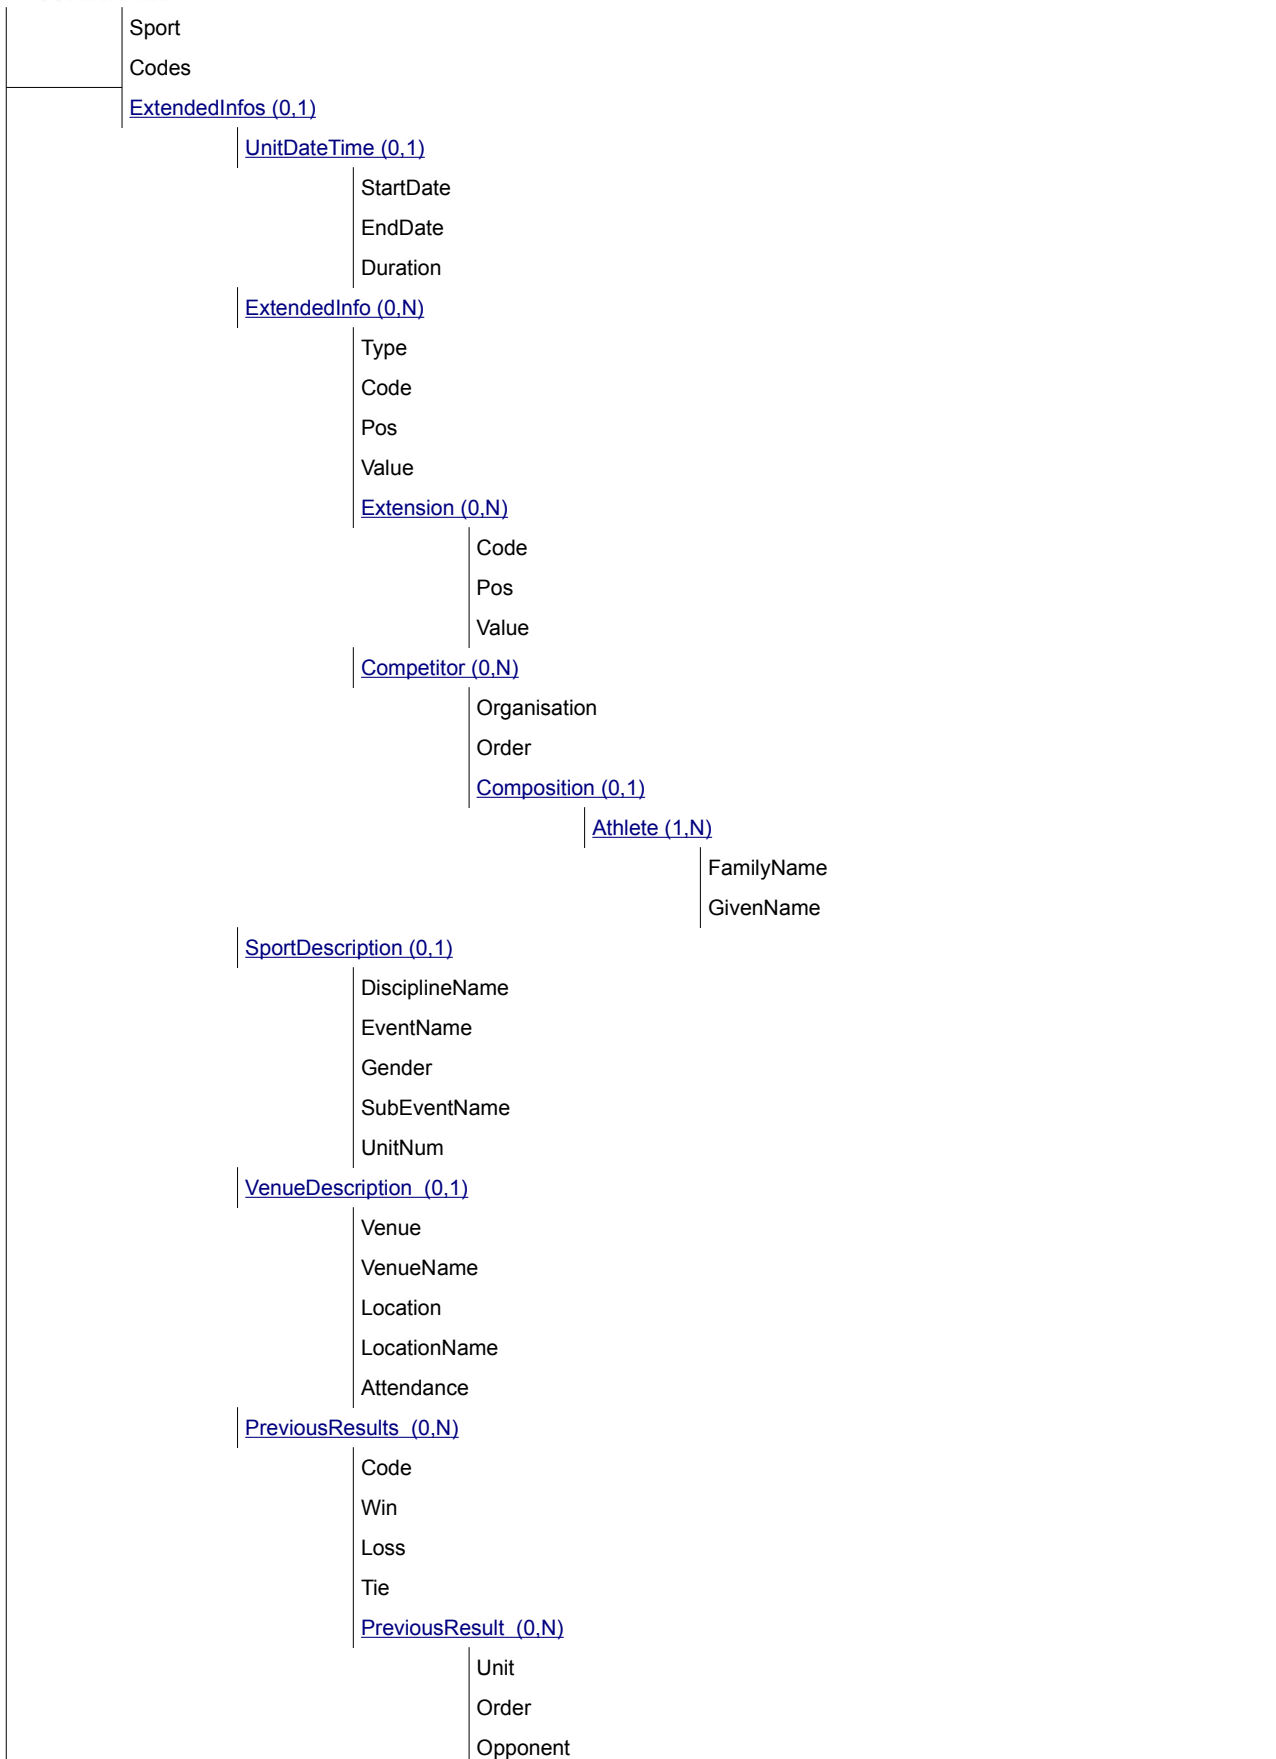

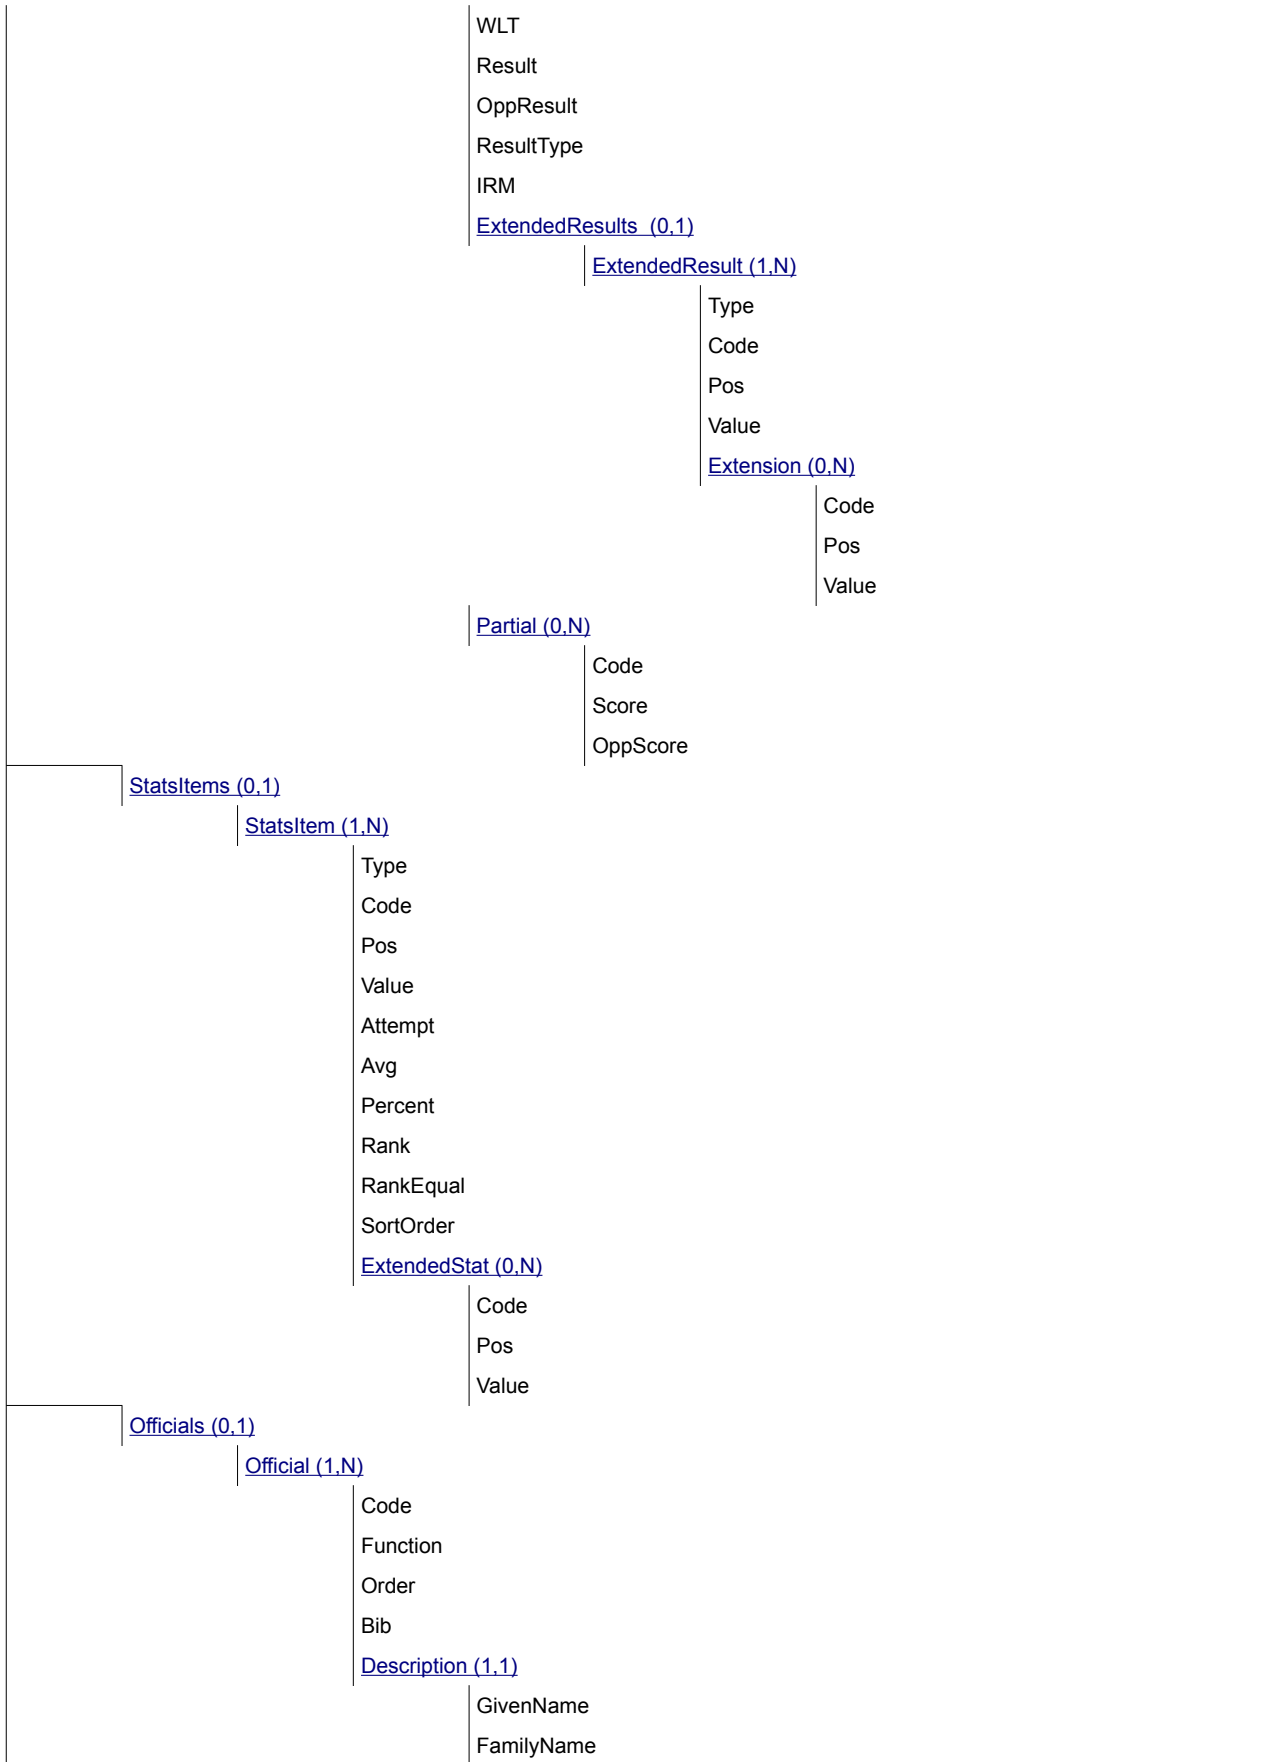

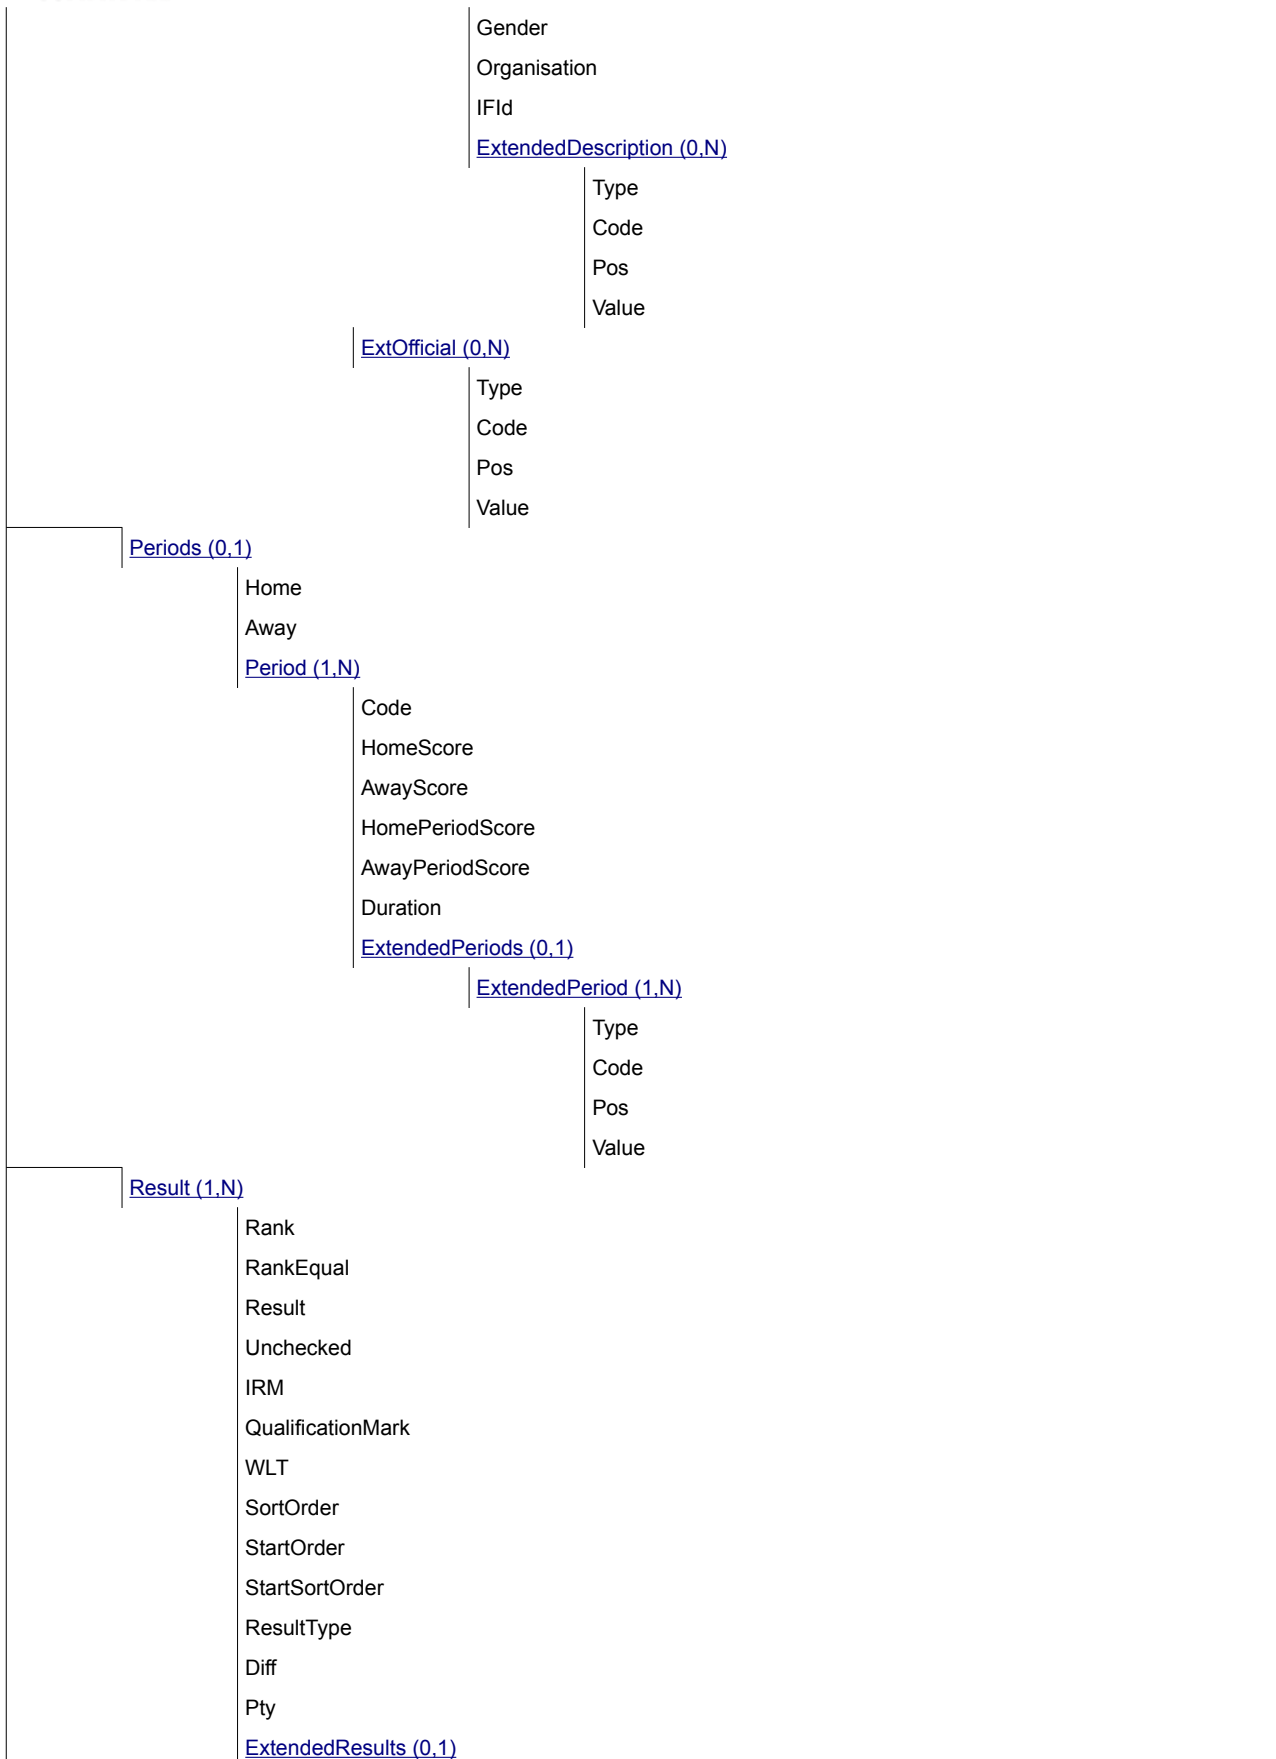



ExtendedResult (1,N)

- Type
- Code
- Pos
- Value
- Value2
- ValueType
- IRM
- Rank
- RankEqual
- SortOrder
- Diff
- Speed
- Move
- Pty
- Discard
- Arrive
- Unchecked

Extension (0,N)

- Code
- Pos
- Value

RecordIndicators (0,1)

RecordIndicator (1,N)

- Order
- Code
- RecordType
- Equalled


ResultItems (0,1)


ResultItem (1,N)

- Unit
- Order

Result (1,1)

- Rank
- RankEqual
- ResultType
- Unchecked
- Result
- ResultPoints
- IRM
- QualificationMark
- Diff
- WLT
- SortOrder

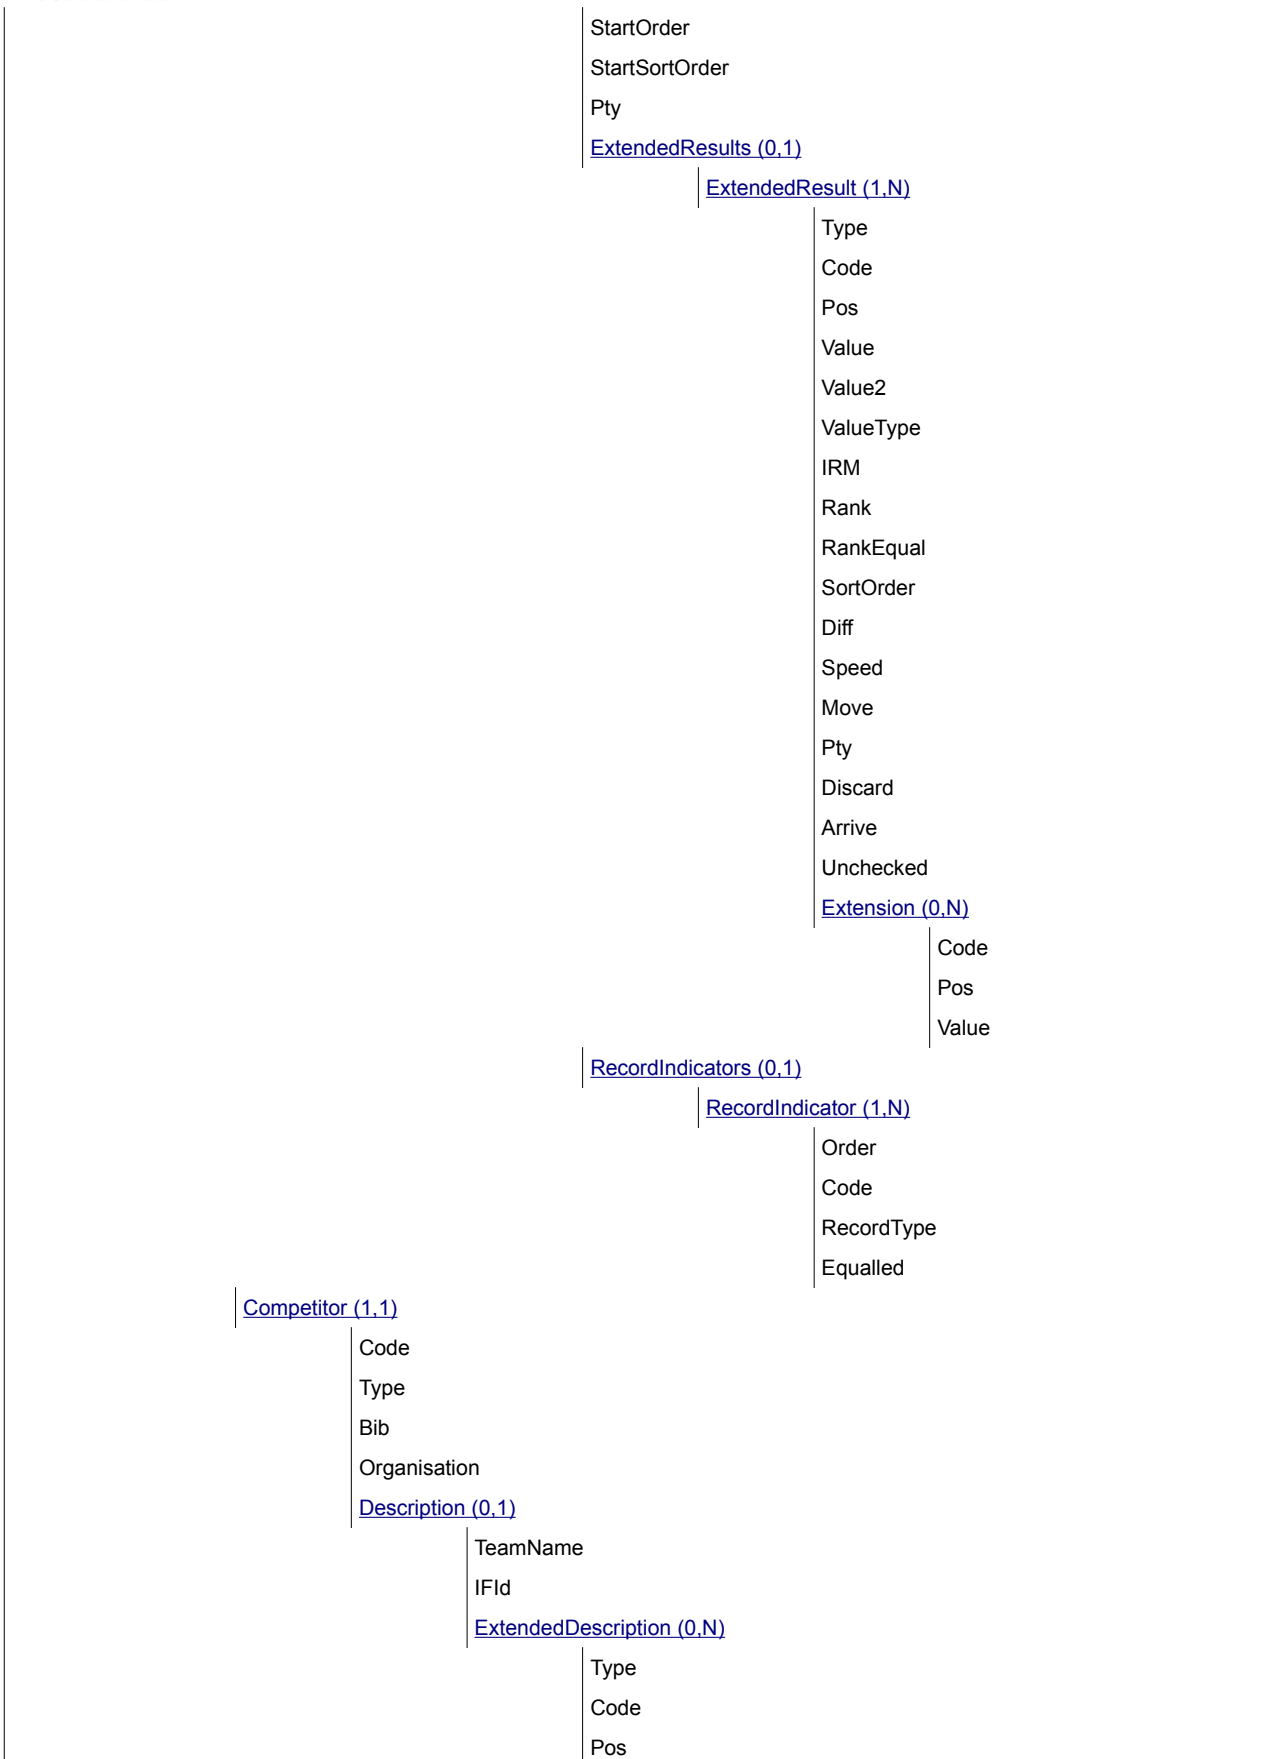

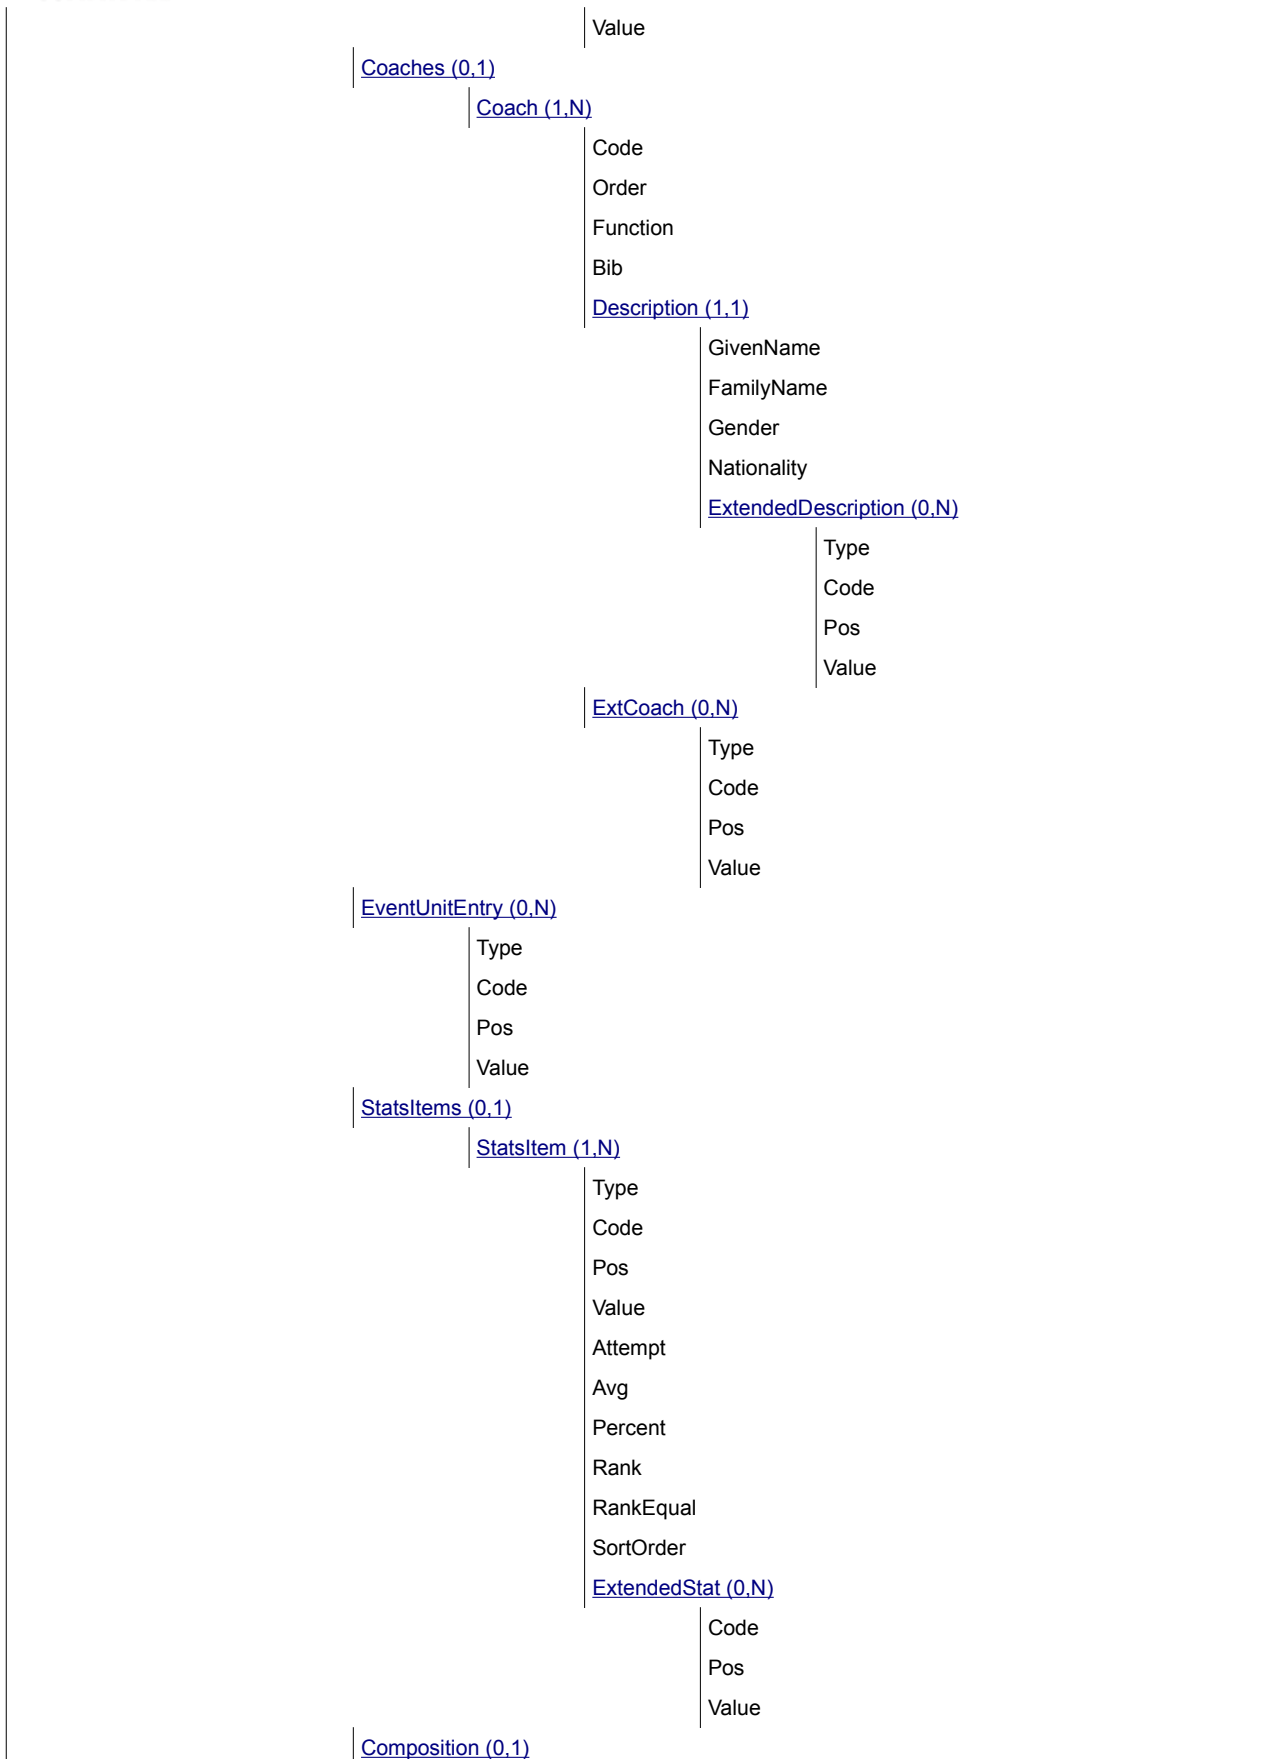





Athlete (0..N)

Code  
Order  
StartOrder  
StartSortOrder  
Bib

Description (1..1)

GivenName  
FamilyName  
Gender  
Organisation  
BirthDate  
IFId  
Class  
Horse  
GuideID  
GuideFamilyName  
GuideGivenName  
ExtendedDescription (0..N)

Type  
Code  
Pos  
Value


EventUnitEntry (0..N)


Type  
Code  
Pos  
Value

ExtendedResults (0..1)

ExtendedResult (1..N)

Type  
Code  
Pos  
Value  
Value2  
ValueType  
IRM  
Rank  
RankEqual  
SortOrder  
Diff  
Speed  
Move  
Pty

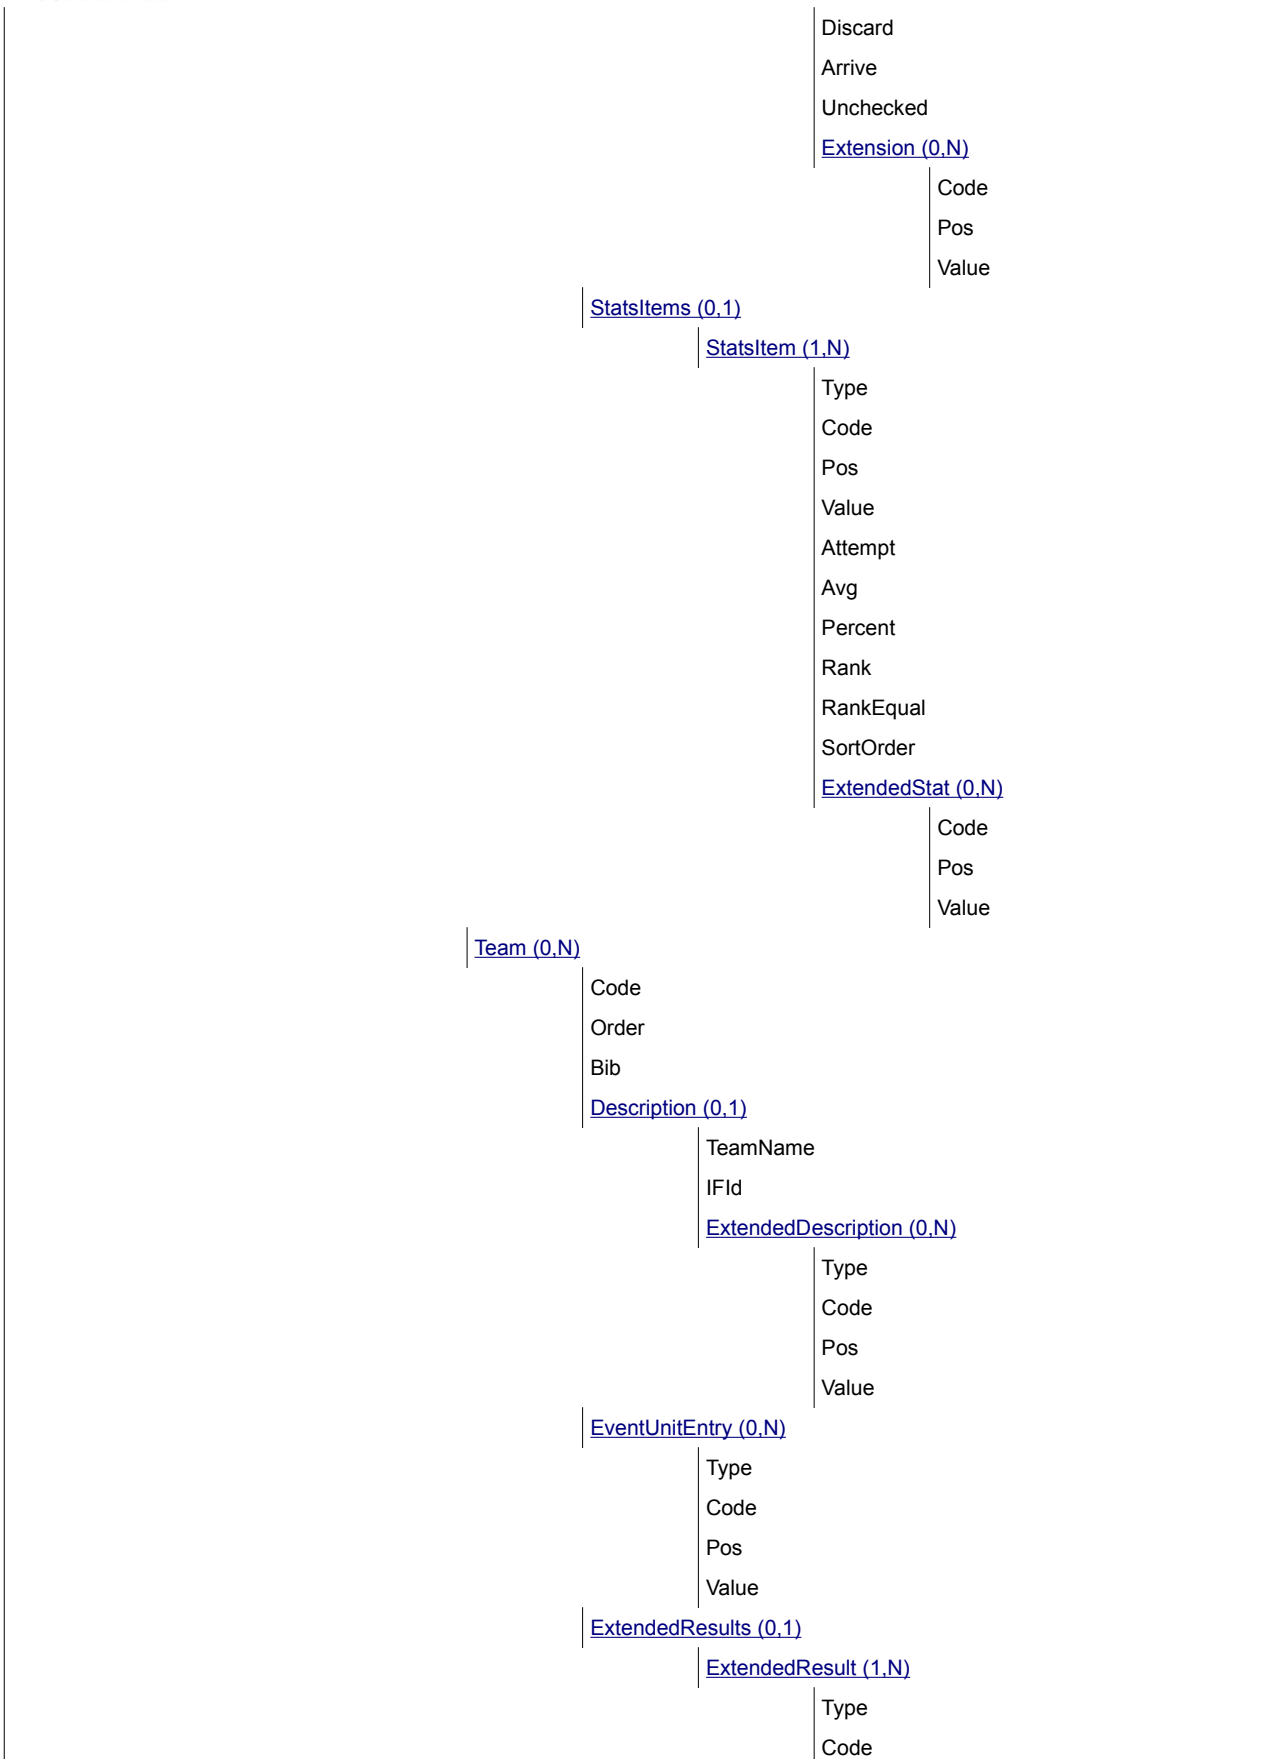

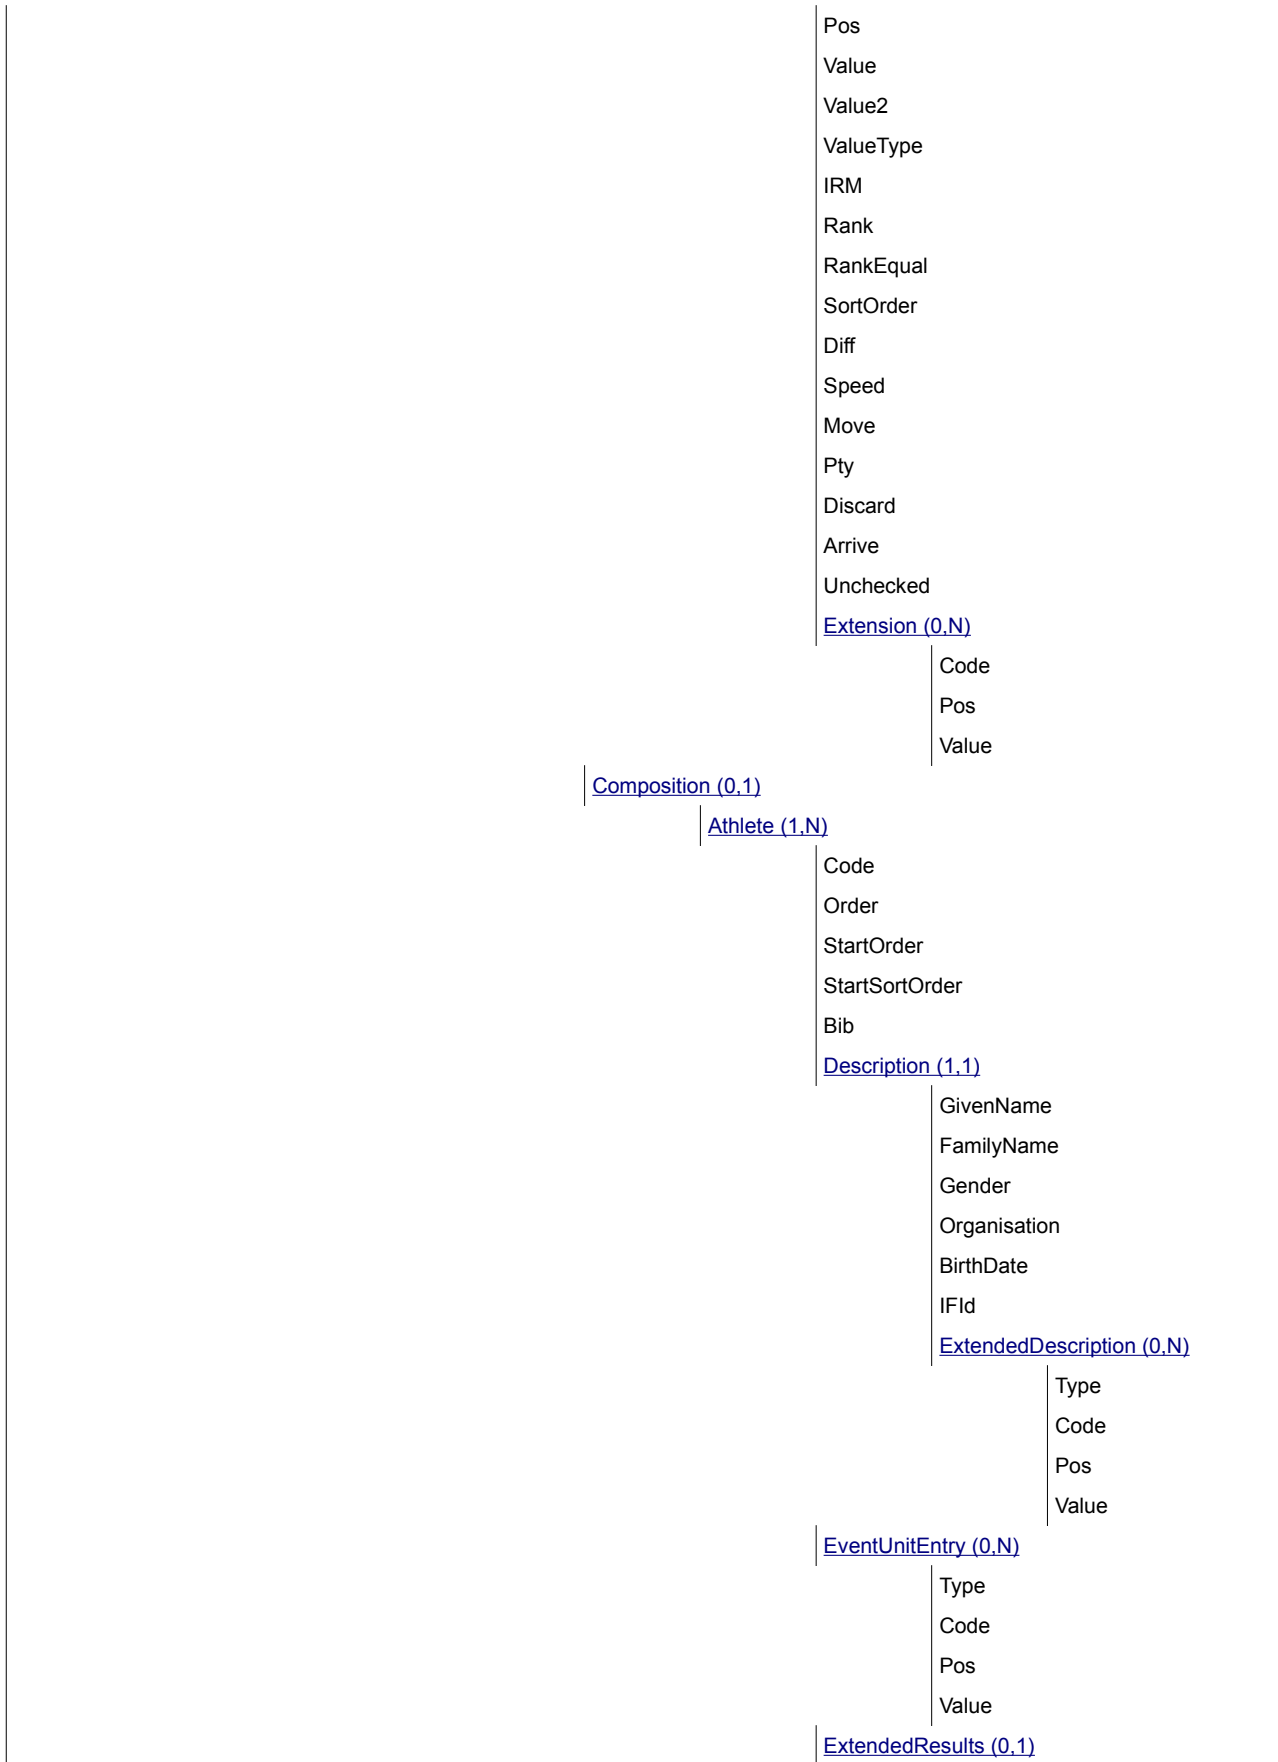



		<a href="#">ExtendedResult (1,N)</a>
		Type
		Code
		Pos
		Value
		Value2
		ValueType
		IRM
		Rank
		RankEqual
		SortOrder
		Diff
		Speed
		Move
		Pty
		Discard
		Arrive
		Unchecked
		<a href="#">Extension (0,N)</a>
		Code
		Pos
		Value

### 2.1.5.5 Message Values

Element Competition (0,1)			
Attribute	M/O	Value	Description
Gen	O	S(20)	Version of the General Data Dictionary applicable to the message
Sport	O	S(20)	Version of the Sport Data Dictionary applicable to the message
Codes	O	S(20)	Version of the Codes applicable to the message

#### Sample (Versions)

<Competition Gen="SOG-2020-1.10" Sport="SOG-2020-DDD-1.10" Codes="SOG-2020-1.20" >

Element ExtendedInfos /UnitDateTime (0,1)			
Actual start date and time / end date and time. (do not include until unit starts)			
Attribute	M/O	Value	Description
StartDate	O	DateTime	Actual start date and time. For multi-day units, the start time is on the first day. (do not include until unit has started)
EndDate	O	DateTime	Actual end date-time (The attribute should only be included when required in the particular sport). Generally do not include.
Duration	O	h:mm	Duration of the unit as defined in the sport.



Table comment: Attribute to be set Mandatory from Optional or redefined. Refer to the ODF Sport Data Dictionary for each of the disciplines

Element ExtendedInfos /ExtendedInfo (0,N)			
Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element ExtendedInfos /ExtendedInfo /Extension (0,N)			
Attribute	M/O	Value	Description
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element ExtendedInfos /ExtendedInfo /Competitor (0,N)			
Used for forerunners and similar who do not participate in the competition. Not usually part of DT_PARTIC.			
Attribute	M/O	Value	Description
Organisation	O	<a href="#">CC_@Organisation</a>	Organisations ID
Order	O	Numeric	Order of the competitor associated to the ExtendedInfo, if more than one competitor associated. Send 1 if only one.

Element ExtendedInfos /ExtendedInfo /Competitor /Composition /Athlete (1,N)			
Used when the ExtendedInfo is related to a person or a team member.			
The FamilyName and GivenName because, in many cases, the person related to the ExtendedInfo is not an athlete.			
Attribute	M/O	Value	Description
FamilyName	M	S(25)	Family name of the person associated to the ExtendedInfo.  This person may not be appearing in the List of athletes by discipline message. For this reason a @Code attribute is not possible.
GivenName	O	S(25)  See table comment	Given name of the person associated to the ExtendedInfo  This person may not be appearing in the List of athletes by discipline message. For this reason a @Code attribute is not possible.

Table comment: Attribute to be set Mandatory from Optional or redefined. Refer to the ODF Sport Data Dictionary for each of the disciplines

Element ExtendedInfos /SportDescription (0,1)			
Sport Descriptions in Text.			
Attribute	M/O	Value	Description

DisciplineName	M	S(40)	Discipline name (not code) from Common Codes
EventName	M	S(40)	Event name (not code) from Common Codes
Gender	M	CC @SportGender	Gender code for the event unit
SubEventName	O	S(40)	EventUnit short name (not code) from Common Codes
UnitNum	O	S(15)	Match / Game / Bout / Race Number or similar if applicable

Element ExtendedInfos /VenueDescription (0,1)			
Venue Names in Text.			
Attribute	M/O	Value	Description
Venue	M	<a href="#">CC @VenueCode</a>	Venue Code
VenueName	M	S(25)	Venue Description (not code) from Common Codes
Location	M	<a href="#">CC @Location</a>	Location code
LocationName	M	S(30)	Location Description (not code) from Common Codes
Attendance	O	Numeric #####0	Total attendance (do not send if unknown)

Element ExtendedInfos /PreviousResults (0,N)			
PreviousResults is normally only added to the message after all previous units for the competitors involved are complete.			
Attribute	M/O	Value	Description
Code	M	S(20) with no leading zeroes	Competitor's ID
Win	O	See sport specific definition	Number of matches won
Loss	O	See sport specific definition	Number of matches lost
Tie	O	See sport specific definition	Number of matches tied

Table comment: Attribute to be set Mandatory from Optional or redefined. Refer to the ODF Sport Data Dictionary for each of the disciplines

Element ExtendedInfos /PreviousResults /PreviousResult (0,N)			
Attribute	M/O	Value	Description
Unit	O	S(40)	Full RSC of the previous event unit. Must always send unless it does not exist (like for a bye)
Order	M	Numeric #0	Order of the units. This will be chronological with the most recent at the bottom.
Opponent	O	S(20) with no leading zeroes or BYE	Competitor ID of the opponent or in the case of a bye send BYE
WLT	O	S(1)	Indicates if the competitor at PreviousResults/Code is the winner (W), loser (L) or tied (T)
Result	O	See sport specific definition	
OppResult	O	See sport specific definition	
ResultType	O	See sport specific definition	
IRM	O	See sport specific definition	

Table comment: Attribute to be set Mandatory from Optional or redefined. Refer to the ODF Sport Data Dictionary for each of the disciplines

Element ExtendedInfos /PreviousResults /PreviousResult /ExtendedResults /ExtendedResult (1,N)			
Attribute	M/O	Value	Description

Type	M	See sport specific definition	
Code	M	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Table comment: Attribute to be set Mandatory from Optional or redefined. Refer to the ODF Sport Data Dictionary for each of the disciplines

Element	ExtendedInfos	/PreviousResults	/PreviousResult	/ExtendedResults	/ExtendedResult	/Extension (0,N)
Attribute	M/O	Value	Description			
Code	M	See sport specific definition				
Pos	O	See sport specific definition				
Value	O	See sport specific definition				

Table comment: Attribute to be set Mandatory from Optional or redefined. Refer to the ODF Sport Data Dictionary for each of the disciplines

### Sample (Tennis)

```
<PreviousResults Code="123456" Win="2" Loss="0">
  <PreviousResult Unit="TENWSINGLES-----R64-0001----" Order="1" Opponent="2222" WLT="W" Result="2"
  OppResult="0">
    <Partial Code="S1" Score="6" OppScore="3" />
    <Partial Code="S2" Score="6" OppScore="2" /> </PreviousResult>
  <PreviousResult Unit="TENWSINGLES-----R32-0002----" Order="2" Opponent="4444" WLT="W" Result="2"
  OppResult="1">
    <Partial Code="S1" Score="6" OppScore="3" />
    <Partial Code="S2" Score="3" OppScore="6" />
    <Partial Code="S3" Score="6" OppScore="0" />
  </PreviousResult>
</PreviousResults>
```

### Sample (Ice Hockey)

```
<PreviousResults Code="IHOMTEAM6---USA01" Win="2" Loss="0">
  <PreviousResult Unit="IHOMTEAM6-----GPA-0001----" Order="1" Opponent="IHOMTEAM6---FRA01"
  WLT="W" Result="7" OppResult="2" />
  <PreviousResult Unit="IHOMTEAM6-----GPA-0004----" Order="2" Opponent="IHOMTEAM6---
  NOR01" WLT="W" Result="2" OppResult="1" />
</PreviousResults>
```

### Sample (Basketball)

```
<PreviousResults Code="BKBWTEAM5---FRA01" Win="2" Loss="1">
  <PreviousResult Unit="BKBWTEAM5-----GPA-0001----" Order="1" Opponent="BKBWTEAM5---NZL01"
  WLT="W" Result="76" OppResult="76" />
  <PreviousResult Unit="BKBWTEAM5-----GPA-0004----" Order="2" Opponent="BKBWTEAM5---USA01"
  WLT="L" Result="75" OppResult="77" />
  <PreviousResult Unit="BKBWTEAM5-----GPA-0007----" Order="3" Opponent="BKBWTEAM5---RSA01"
  WLT="W" ResultType="IRM" IRM="DSQ" />
</PreviousResults>
```



**Sample (Wrestling)**

```
<PreviousResults Code="123456" Win="2" Loss="0">
<PreviousResult Unit="WREW59K-----R32-0001----" Order="1" Opponent="2222"
WLT="W" Result="5" OppResult="0"/>
<PreviousResult Unit="WREW59K-----8FNL-0001----" Order="2" Opponent="4444"
WLT="W" Result="4" OppResult="0"/>
</PreviousResults>
```

Element ExtendedInfos /PreviousResults /PreviousResult /Partial (0,N)				
Attribute	M/O	Value		Description
Code	M	See sport	specific	
Score	O	See sport	specific	Usually for the competitor in the period
OppScore	O	See sport	specific	Usually for the opposing competitor in the period

Table comment: Attribute to be set Mandatory from Optional or redefined. Refer to the ODF Sport Data Dictionary for each of the disciplines

Element Competition /StatsItems /StatsItem (1,N)				
Attribute	M/O	Value		Description
Type	O	See sport	specific definition	
Code	O	See sport	specific definition	
Pos	O	See sport	specific definition	
Value	O	See sport	specific definition	
Attempt	O	See sport	specific definition	
Avg	O	See sport	specific definition	Related to average
Percent	O	See sport	specific definition	Related to percentage
Rank	O	See sport	specific definition	Rank for this statistic
RankEqual	O	S(1)		Send Y where Rank for this statistic is equalled else not sent.
SortOrder	O	See sport	specific definition	Similar to rank but considering all data for this statistic

Table comment: Attribute to be set Mandatory from Optional or redefined. Refer to the ODF Sport Data Dictionary for each of the disciplines

Element Competition /StatsItems /StatsItem /ExtendedStat (0,N)				
Attribute	M/O	Value		Description
Code	O	See sport	specific definition	
Pos	O	See sport	specific definition	
Value	O	See sport	specific definition	

Table comment: Attribute to be set Mandatory from Optional or redefined. Refer to the ODF Sport Data Dictionary for each of the disciplines

Element Officials /Official (1,N)				
Attribute	M/O	Value		Description
Code	M	S(20)	with no leading	Official's code



		zeroes	
Function	M	<a href="#">CC @ResultsFunction</a>	Official's function. Can be different from the function sent in the DT_PARTIC message.
Order	O	See table comment	Official's order (if the discipline specificity required it).
Bib	O	See table comment	Official's Bib number

Table comment: Attribute to be set Mandatory from Optional or redefined. Refer to the ODF Sport Data Dictionary for each of the disciplines

Element Officials /Official /Description (1,1)			
Officials extended information.			
Attribute	M/O	Value	Description
GivenName	O	S(25)	Given name in WNPA format (mixed case)
FamilyName	M	S(25)	Family name in WNPA format (mixed case)
Gender	M	<a href="#">CC @PersonGender</a>	Gender of the official
Organisation	M	<a href="#">CC @Organisation</a>	Officials' organisation
IFId	O	S(16)	International Federation ID

Element Officials /Official /Description /ExtendedDescription (0,N)			
Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element Officials /Official /ExtOfficial (0,N)			
Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element Periods (0,1)			
Attribute	M/O	Value	Description
Home	O	S(20) with no leading zeroes	Home Competitor ID
Away	O	S(20) with no leading zeroes	Away Competitor ID

Element Periods /Period (1,N)			
Period in which the event unit message arrives.			
Attribute	M/O	Value	Description
Code	M	See table comment	Period's code
HomeScore	M	See table comment	Overall score of the home competitor at the end of the period
AwayScore	M	See table comment	Overall score of the away competitor at the end of the period
HomePeriodScore	O	See table comment	Score of the home competitor just for this period



AwayPeriodScore	O	See table comment	Score of the away competitor just for this period
Duration	O	See table comment	Duration of the period

Table comment: Attribute to be set Mandatory from Optional or redefined. Refer to the ODF Sport Data Dictionary for each of the disciplines

<b>Element Periods /Period /ExtendedPeriods /ExtendedPeriod (1,N)</b>			
<b>ExtendedPeriod information.</b>			
<b>Attribute</b>	<b>M/O</b>	<b>Value</b>	<b>Description</b>
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

<b>Element Result (1,N)</b>			
<b>For each Event Unit Results message, there must be at least one competitor with a result element in the event unit.</b>			
<b>Attribute</b>	<b>M/O</b>	<b>Value</b>	<b>Description</b>
Rank	O	Text  See table comment	Rank of the competitor
RankEqual	O	S(1)	Identifies if a rank has been equalled. Send Y if applicable else not sent.
Result	O	See table comment	The result of the competitor in the event unit
Unchecked	O	See table comment	Send with ="Y" in the case that there is a value which needs to be validated. For example by reading photo to change from transponder times. Do not send if not ="Y"
IRM	O	See table comment	The invalid result mark, in case it is assigned
QualificationMark	O	See table comment	Indicates the qualification of the competitor for the next round of the competition
WLT	O	See table comment	The code whether a competitor won, lost or tied the match / game
SortOrder	M	Numeric  See table comment	Used to sort all the results of an event unit  Before the start of any event unit this will be the same as the StartSortOrder and is used as the primary sort except in the case where a Rank is available (from earlier event units) and in this case the SortOrder will consider Rank in the same way as if the competition had already started.  During the event unit any sort order change from the initial start list order for any competitor will be provided in this attribute regardless the competitor is ranked or not.
StartOrder	O	Numeric  See table comment	Competitor's start order
StartSortOrder	M	Numeric  See table comment	Used to sort all start list competitors in an event unit.
ResultType	O	See table comment	Type of the @Result attribute.
Diff	O	See table comment	Display the time / value behind the leader. All fill when applicable, 0.0 for leader, negative for in front of leader, positive for behind. For example +3.45 means 3.45 sec behind



			the leader, -1.23 means -1.23 sec in front of (better than) the leader.
Pty	O	See table comment	Penalty information

Table comment: Attribute to be set Mandatory from Optional or redefined. Refer to the ODF Sport Data Dictionary for each of the disciplines

Element Result /ExtendedResults /ExtendedResult (1,N)			
Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	
Value2	O	See sport specific definition	
ValueType	O	See sport specific definition	ValueType should be used to describe the type of data @Value
IRM	O	See sport specific definition	Send appropriate IRM code if IRM at this ExtendedResult
Rank	O	See sport specific definition	Rank of the competitor for this specific ExtendedResult.
RankEqual	O	S(1)	Send Y where Rank at this specific ExtendedResult is equalled else not sent.
SortOrder	O	See sport specific definition	Similar to rank but considering all competitors (those with IRM or no rank at this ExtendedResult
Diff	O	See sport specific definition	Time/Points etc behind leader at this ExtendedResult
Speed	O	See sport specific definition	Speed at this ExtendedResult
Move	O	See sport specific definition	Change in rank compared to the previous ExtendedResult
Pty	O	See sport specific definition	Penalty information
Discard	O	See sport specific definition	Used when data is to be discarded
Arrive	O	See sport specific definition	Related to arrival information
Unchecked	O	S(1)	Send Y where the result @Value has not been appropriately validated (sport specific) else do not send.

Element Result /ExtendedResults /ExtendedResult /Extension (0,N)			
Attribute	M/O	Value	Description
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element Result /RecordIndicators /RecordIndicator (1,N)			
Result's record indicator.			
Attribute	M/O	Value	Description
Order	M	Numeric	The hierarchy (priority) for types of record from 1 to n. (Can use the Order column from CC @RecordType for reference).
Code	M	<a href="#">CC @RecordCode</a>	Code which describes the record broken by the result value.
RecordType	M	<a href="#">CC @RecordType</a>	Code which specifies the level at which the record is broken.
Equalled	O	S(1)	Send "Y" in the case that the record has been equalled else do not send.

Element Result /ResultItems /ResultItem (1,N)			
---	--	--	--



Identifier of unit, for the item included the result summary. ResultItem /Result will be for one particular previous unit.			
Attribute	M/O	Value	Description
Unit	M	See sport specific documentation	Unit code of the related sub-unit. It may be at phase or unit level.
Order	O	Numeric #0	Logical order of the sub-units, usually schedule order.

Element Result /ResultItems /ResultItem /Result (1,1) For any Event Unit Results message, there should be at least one competitor being awarded a result for the event unit.			
Attribute	M/O	Value	Description
Rank	O	Text See table comment	Rank of the competitor in the result for the event unit or phase identified by /ResultItems /ResultItem.
RankEqual	O	S(1)	Identifies if a rank has been equalled. Send Y if applicable else not sent.
ResultType	O	See table comment	Type of the @Result attribute for the event unit or phase identified by /ResultItems /ResultItem. This is relative the value in Result below.
Unchecked	O	See table comment	Send with ="Y" in the case that there is a value which needs to be validated. For example by reading photo to change from transponder times. Do not send if ="Y"
Result	O	See table comment	The result of the competitor in the event unit for the event unit or phase identified by /ResultItems /ResultItem. This is usually the 'raw' result but is detailed in each data dictionary.
ResultPoints	O	See table comment	If the 'raw' score is converted to points to calculate the overall result then put the points here.
IRM	O	See table comment	The invalid rank mark, in case it is assigned for the event unit or phase identified by /ResultItems /ResultItem
QualificationMark	O	See table comment	The code which gives an indication on the qualification of the competitor for the next round of the competition for the event unit or phase identified by /ResultItems /ResultItem
Diff	O	See table comment	Display the time / value behind the leader. All fill when applicable, 0.0 for leader, negative for in front of leader, positive for behind. For example +3.45 means 3.45 sec behind the leader, -1.23 means -1.23 sec in front of (better than) the leader.
WLT	O	See table comment	The code whether a competitor won, lost or tied the match / game for the event unit identified by /ResultItems /ResultItem. It just applied to event units
SortOrder	O	Numeric ##0	Used to sort all results in an event unit or phase identified by /ResultItems /ResultItem
StartOrder	O	See table comment	Start order for display if applicable
StartSortOrder	O	See table comment	Order at the start for sorting, not display.
Pty	O	See table comment	Penalty information

Element Result /ResultItems /ResultItem /Result /ExtendedResults /ExtendedResult (1,N)			
Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	



Value2	O	See sport specific definition	
ValueType	O	See sport specific definition	ValueType should be used to describe the type of data @Value
IRM	O	See sport specific definition	Send appropriate IRM code if IRM at this ExtendedResult
Rank	O	See sport specific definition	Rank of the competitor for this specific ExtendedResult.
RankEqual	O	S(1)	Send Y where Rank at this specific ExtendedResult is equalled else not sent.
SortOrder	O	See sport specific definition	Similar to rank but considering all competitors (those with IRM or no rank at this ExtendedResult)
Diff	O	See sport specific definition	Time/Points etc behind leader at this ExtendedResult
Speed	O	See sport specific definition	Speed at this ExtendedResult
Move	O	See sport specific definition	Change in rank compared to previous ExtendedResult
Pty	O	See sport specific definition	Penalty information
Discard	O	See sport specific definition	Used when data is to be discarded
Arrive	O	See sport specific definition	Related to arrive information
Unchecked	O	S(1)	Send Y where the result @Value has not been appropriately validated (sport specific) else do not send.

Element Result /ResultItems /ResultItem /Result /ExtendedResults /ExtendedResult /Extension (0,N)			
Attribute	M/O	Value	Description
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element Result /ResultItems /ResultItem /Result /RecordIndicators /RecordIndicator (1,N)			
Attribute	M/O	Value	Description
Order	M	Numeric	The hierarchy (priority) for types of record from 1 to n. Can use the Order column from CC@RecordType for reference).
Code	M	<a href="#">CC @RecordCode</a>	Code which describes the record broken by the result value.
RecordType	M	<a href="#">CC @RecordType</a>	Code which specifies the level at which the record is broken.
Equalled	O	S(1)	Send Y in the case that the record has been equalled else do not send.

Element Result /Competitor (1,1)			
Competitor related to the result of one event unit.			
Attribute	M/O	Value	Description
Code	M	S(20) with no leading zeroes or SC @CompetitorPlace	Competitor's ID or another indicator (SC @CompetitorPlace) which may include possible options of: TBD in case that the competitor is unknown at this time but will be available NOCOMP is sent when there is no competitor (and will not come later) BYE is used when there is a scheduled match of BYE.
Type	M	S(1)	A for athlete, T for team, H for Horse
Bib	O	See table comment	Bib number
Organisation	O	<a href="#">CC @Organisation</a>	Competitor's organisation

Table comment: Attribute to be set Mandatory from Optional or redefined. Refer to the ODF Sport Data Dictionary for each of the disciplines



**Element Result /Competitor /Description (0,1)**

**Competitors extended information.**

Attribute	M/O	Value	Description
TeamName	M	S(73)	Name of the team. Only applies for teams / groups. Not usually for pairs (figure skating & beach volleyball are the exceptions).
IFId	O	S(16)	International Federation ID

Table comment: Attribute to be set Mandatory from Optional or redefined. Refer to the ODF Sport Data Dictionary for each of the disciplines

**Element Result /Competitor /Description /ExtendedDescription (0,N)**

Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

**Element Result /Competitor /Coaches /Coach (1,N)**

**Competitor's Coach**

Attribute	M/O	Value	Description
Code	O	S(20) with no leading zeroes	Official code. This code is normally expected though there may be rare exceptions.
Order	O	See table comment	Coach order (if more than one coach is needed). Send 1 if only one.
Function	O	See table comment	Official function
Bib	O	See table comment	Official Bib number

Table comment: Attribute to be set Mandatory from Optional or redefined. Refer to the ODF Sport Data Dictionary for each of the disciplines

**Element Result /Competitor /Coaches /Coach /Description (1,1)**

**Coach extended information.**

Attribute	M/O	Value	Description
GivenName	O	S(25)	Given name in WNPA format (mixed case)
FamilyName	M	S(25)	Family name in WNPA format (mixed case)
Gender	M	<a href="#">CC @PersonGender</a>	Gender of the official
Nationality	M	<a href="#">CC @Country</a>	Coach's nationality

**Element Result /Competitor /Coaches /Coach /Description /ExtendedDescription (0,N)**

Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

**Element Result /Competitor /Coaches /Coach /ExtCoach (0,N)**

Attribute	M/O	Value	Description
-----------	-----	-------	-------------



Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Table comment: Attribute to be set Mandatory from Optional or redefined. Refer to the ODF Sport Data Dictionary for each of the disciplines

Element Result /Competitor /EventUnitEntry (0,N)			
For team event information			
Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element Result /Competitor /StatsItems /StatsItem (1,N)			
Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	
Attempt	O	See sport specific definition	
Avg	O	See sport specific definition	Related to average
Percent	O	See sport specific definition	Related to percentage
Rank	O	See sport specific definition	Rank of the competitor for this statistic.
RankEqual	O	S(1)	Send Y where Rank for this statistic is equalled else not sent.
SortOrder	O	See sport specific definition	Similar to rank but considering all competitors for this statistic

Element Result /Competitor /StatsItems /StatsItem /ExtendedStat (0,N)			
Extended information for the statistics.			
Attribute	M/O	Value	Description
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element Result /Competitor /Composition /Athlete (0,N)			
Attribute	M/O	Value	Description
Code	M	S(20) with no leading zeroes	Athlete's ID. Can belong to a team member or an individual athlete.
Order	M	Numeric 0	Order attribute used to sort team members in a team (if Competitor @Type="T") on the results or 1 if Competitor @Type="A".
StartOrder	O	Numeric See table comment	Order of team members in a team (if Competitor @Type="T") on the start list. This is only used where the order changes from the start order to a different order during a competition or in results.



StartSortOrder	O	Numeric See table comment	Order attribute used to sort team members in a team (if Competitor @Type="T") on the start list. This is only used where the order changes from the start order to a different order during a competition or in results.
Bib	O	See table comment	Bib number

Table comment: Attribute to be set Mandatory from Optional or redefined. Refer to the ODF Sport Data Dictionary for each of the disciplines

Element Result /Competitor /Composition /Athlete /Description (1,1)			
Athletes extended information.			
Attribute	M/O	Value	Description
GivenName	O	S(25)	Given name in WNPA format (mixed case)
FamilyName	M	S(25)	Family name in WNPA format (mixed case)
Gender	M	<a href="#">CC @PersonGender</a>	Gender of the athlete
Organisation	M	<a href="#">CC @Organisation</a>	Athletes' organisation
BirthDate	O	Date	Birth date (example: YYYY-MM-DD). Must include if the data is available
IFId	O	S(16)	International Federation ID
Class	O	CC @DisplineClass	Code to identify the sport class in the case of events with athletes with a disability (e.g: Paralympic Games).  This attribute is optional because it is not used in events without such athletes.
Horse	O	S(25)	Name of the athlete's horse
GuideID	O	S(20) without leading zeros	ID of the Guide, used for some athletes with a disability (e.g: Paralympic Games).
GuideFamilyName	O	S(25)	Family Name of the athlete's guide (mixed case).  Used for some athletes with a disability (e.g: Paralympic Games).
GuideGivenName	O	S(25)	Given Name of the athlete's guide (mixed case).  Used for some athletes with a disability (e.g: Paralympic Games).

Element Result /Competitor /Composition /Athlete /Description /ExtendedDescription (0,N)			
Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element Result /Competitor /Composition /Athlete /EventUnitEntry (0,N)			
Individual athletes entry information.			
Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	





Element Result /Competitor /Composition /Athlete /ExtendedResults /ExtendedResult (1,N)			
Team member or individual athlete's extended result.			
Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	
Value2	O	See sport specific definition	
ValueType	O	See sport specific definition	ValueType should be used to describe the type of data @Value
IRM	O	See sport specific definition	Send appropriate IRM code if IRM at this ExtendedResult
Rank	O	See sport specific definition	Rank of the competitor for this specific ExtendedResult.
RankEqual	O	S(1)	Send Y where Rank at this specific ExtendedResult is equalled else not sent.
SortOrder	O	See sport specific definition	Similar to rank but considering all competitors (those with IRM or no rank at this ExtendedResult
Diff	O	See sport specific definition	Time/Points etc behind leader at this ExtendedResult
Speed	O	See sport specific definition	Speed at this ExtendedResult
Move	O	See sport specific definition	Change in rank compared to the previous ExtendedResult
Pty	O	See sport specific definition	Penalty information
Discard	O	See sport specific definition	Used when data is to be discarded
Arrive	O	See sport specific definition	Related to arrival information
Unchecked	O	S(1)	Send Y where the result @Value has not been appropriately validated (sport specific) else do not send.

Element Result /Competitor /Composition /Athlete /ExtendedResults /ExtendedResult /Extension (0,N)			
Attribute	M/O	Value	Description
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element Result /Competitor /Composition /Athlete /StatsItems /StatsItem (1,N)			
Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	
Attempt	O	See sport specific definition	
Avg	O	See sport specific definition	Related to average
Percent	O	See sport specific definition	Related to Percentage
Rank	O	See sport specific definition	Rank of the competitor for this statistic
RankEqual	O	S(1)	Send Y where Rank for this statistic is equalled else not sent.
SortOrder	O	See sport specific definition	Similar to rank but considering all competitors at this statistic

Element Result /Competitor /Composition /Athlete /StatsItems /StatsItem /ExtendedStat (0,N)			
Extended information for the statistics.			



Attribute	M/O	Value	Description
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element Result /Competitor /Composition /Team (0,N)			
Only applicable in the case of team of teams.			
Attribute	M/O	Value	Description
Code	M	S(20) with no leading zeroes	Team's ID (example ATHM4X400m--ESP01, 393553) When the Team is an historical one, then this ID starts with "T".
Order	M	Numeric	Order attribute used to sort the teams if there are multiple teams else 1.
Bib	O	Defined by Discipline	Bib number, send if available (team bib)

Element Result /Competitor /Composition /Team /Description (0,1)			
Attribute	M/O	Value	Description
TeamName	M	S(73)	Name of the team.
IFld	O	S(16)	International Federation ID

Element Result /Competitor /Composition /Team /Description /ExtendedDescription (0,N)			
Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element Result /Competitor /Composition /Team /EventUnitEntry (0,N)			
For team entry information			
Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element Result /Competitor /Composition /Team/ExtendedResults/ExtendedResult (1,N)			
Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	
Value2	O	See sport specific definition	
ValueType	O	See sport specific definition	ValueType should be used to describe the type of data @Value
IRM	O	See sport specific definition	Send appropriate IRM code if IRM at this ExtendedResult
Rank	O	See sport specific definition	See sport specific definition
RankEqual	O	S(1)	Send Y where Rank at this specific ExtendedResult is equalled

			else not sent.
SortOrder	O	See sport specific definition	Similar to rank but considering all competitors (those with IRM or no rank at this ExtendedResult)
Diff	O	See sport specific definition	Time/Points etc behind leader at this ExtendedResult
Speed	O	Speed at this ExtendedResult	Speed at this ExtendedResult
Move	O	See sport specific definition	Change in rank compared to the previous ExtendedResult
Pty	O	See sport specific definition	Penalty information
Discard	O	See sport specific definition	Used when data is to be discarded
Arrive	O	See sport specific definition	Related to arrival information
Unchecked	O	S(1)	Send Y where the result @Value has not been appropriately validated (sport specific) else do not send.

Table comment: Attribute to be set Mandatory from Optional or redefined. Refer to the ODF Sport Data Dictionary for each of the disciplines

Element Result /Competitor /Composition /Team/ExtendedResults/ExtendedResult/Extension (0,N)			
Attribute	M/O	Value	Description
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Table comment: Attribute to be set Mandatory from Optional or redefined. Refer to the ODF Sport Data Dictionary for each of the disciplines

Element Result /Competitor /Composition /Team /Composition /Athlete (1,N)			
Attribute	M/O	Value	Description
Code	M	S(20) with no leading zeros	Athlete ID of the listed team's member. Therefore, he/she is a member of the team.
Order	O	Numeric	Team member order
StartOrder	O	See sport specific definition	Order of team members in a team on the start list. This is only used where the order changes from the start order to a different order during a competition or in results.
StartSortOrder	O	Numeric but see sport specific definition for any redefinition	Order attribute used to sort team members in a team on the start list. This is only used where the order changes from the start order to a different order during a competition or in results.
Bib	O	See sport specific definition	Bib number

Element Result /Competitor /Composition /Team /Composition /Athlete /Description (1,1)			
Attribute	M/O	Value	Description
GivenName	O	S(25)	Given name in WNPA format (mixed case)
FamilyName	M	S(25)	Family name in WNPA format (mixed case)
Gender	M	<a href="#">CC @PersonGender</a>	Gender of the athlete
Organisation	M	<a href="#">CC @Organisation</a>	Athletes' organisation
BirthDate	O	Date	Birth date (example: YYYY-MM-DD). Must include if the data is available
IFId	O	S(16)	International Federation ID



Element Result /Competitor /Composition /Team /Composition /Athlete /Description /ExtendedDescription (0,N)			
Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element Result /Competitor /Composition /Team /Composition /Athlete /EventUnitEntry (0,N)			
Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element Result /Competitor /Composition /Team /Composition /Athlete /ExtendedResults /ExtendedResult (1,N)			
Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	
Value2	O	See sport specific definition	
ValueType	O	See sport specific definition	ValueType should be used to describe the type of data @Value
IRM	O	See sport specific definition	Send appropriate IRM code if IRM at this ExtendedResult
Rank	O	See sport specific definition	Rank of the competitor for this specific ExtendedResult.
RankEqual	O	S(1)	Send Y where Rank at this specific ExtendedResult is equalled else not sent.
SortOrder	O	See sport specific definition	Similar to rank but considering all competitors (those with IRM or no rank at this ExtendedResult)
Diff	O	See sport specific definition	Time/Points etc behind leader at this ExtendedResult
Speed	O	See sport specific definition	Speed at this ExtendedResult
Move	O	See sport specific definition	Change in rank compared to the previous ExtendedResult
Pty	O	See sport specific definition	Penalty information
Discard	O	See sport specific definition	Used when data is to be discarded
Arrive	O	See sport specific definition	Related to arrival information
Unchecked	O	S(1)	Send Y where the result @Value has not been appropriately validated (sport specific) else do not send.

Element Result /Competitor /Composition /Team /Composition /Athlete /ExtendedResults /ExtendedResult /Extension (0,N)			
Attribute	M/O	Value	Description
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

### 2.1.5.6 Message Sort

Sort by Result @SortOrder



INTERNATIONAL  
OLYMPIC  
COMMITTEE

SOG-2020-GEN-2.2 APP

## 2.1.6 Results Analysis

### 2.1.6.1 Description

The Results Analysis is a message containing additional information for the start list and/or results.

Results Analysis is only used in sports where the results can be split and may not need to be updated as frequently. For example detailed splits in triathlon and diving details.

### 2.1.6.2 Header Values

The following table describes the message header attributes.

Attribute	Value	Comment
CompetitionCode	<a href="#">CC @Competition</a>	Unique ID for competition
DocumentCode	<a href="#">CC @Unit</a>	Each ODF Sport Data Dictionary will have to update the definition of this attribute
DocumentType	DT_RESULT_ANALYSIS	Event Unit Result Analysis message
DocumentSubtype	S(20) To be defined in each ODF Data Dictionary	Attribute used to extend DocumentType for some messages.
Version	1..V	Version number associated to the message's content. Ascendant number
ResultStatus	<a href="#">SC @ResultStatus</a>	It indicates whether the result is official or unofficial (or intermediate etc). START_LIST OFFICIAL UNOFFICIAL INTERMEDIATE (used when the competition is not finished but not currently live) LIVE (used during the competition when nothing else applies) UNCONFIRMED (used after the competition is completed and before either UNOFFICIAL or OFFICIAL. It may be sent multiple times if modifications are required)
FeedFlag	"P"-Production "T"-Test	Test message or production message.
Date	Date	Date when the message is generated, expressed in the local time zone where the message was produced.
Time	Time	Time up to milliseconds when the message is generated, expressed in the local time zone where the message was produced.
LogicalDate	Date	Logical Date of events. This is the same as the physical day except when the unit or message transmission extends after midnight. See full explanation in ODF Foundation.
Source	<a href="#">SC @Source</a>	Code indicating the system which generated the message.

### 2.1.6.3 Trigger and Frequency

The triggered is defined on a sport by sport basis but in principle is updated each time there is a change.

This message is also sent when the event unit finishes and the results are still unofficial. Also, this message is expected when the results become official. The official/unofficial status is included in the ODF headers (ResultStatus attribute). The message is sent as 'INTERMEDIATE' during extended breaks (including unplanned due to weather conditions etc).


If there is any kind of sport specific rule, this can overwrite in the corresponding ODF Sport Data Dictionaries the general trigger rule




### 2.1.6.4 Message Structure


The following table defines the structure of the message.


Level 1	Level 2	Level 3	Level 4	Level 5	Level 6	Level 7	Level 8	Level 9	Level 10	Level 11
<a href="#">Competition (0.1)</a>										
	Gen									
	Sport									
	Codes									
	<a href="#">ExtendedInfos (0.1)</a>									
		<a href="#">UnitDateTime (0.1)</a>								
			StartDate							
			EndDate							
			Duration							
		<a href="#">ExtendedInfo (0.N)</a>								
			Type							
			Code							
			Pos							
			Value							
		<a href="#">Extension (0.N)</a>								
				Code						
				Pos						
				Value						
		<a href="#">Competitor (0.N)</a>								
			Organisation							
			Order							
			<a href="#">Composition (0.1)</a>							
				<a href="#">Athlete (1.N)</a>						
					FamilyName					
					GivenName					
		<a href="#">SportDescription (0.1)</a>								
			DisciplineName							
			EventName							
			Gender							
			SubEventName							
			UnitNum							
		<a href="#">VenueDescription (0.1)</a>								
			Venue							
			VenueName							
			Location							
			LocationName							
			Attendance							
		<a href="#">PreviousResults (0.N)</a>								
			Code							
			Win							
			Loss							

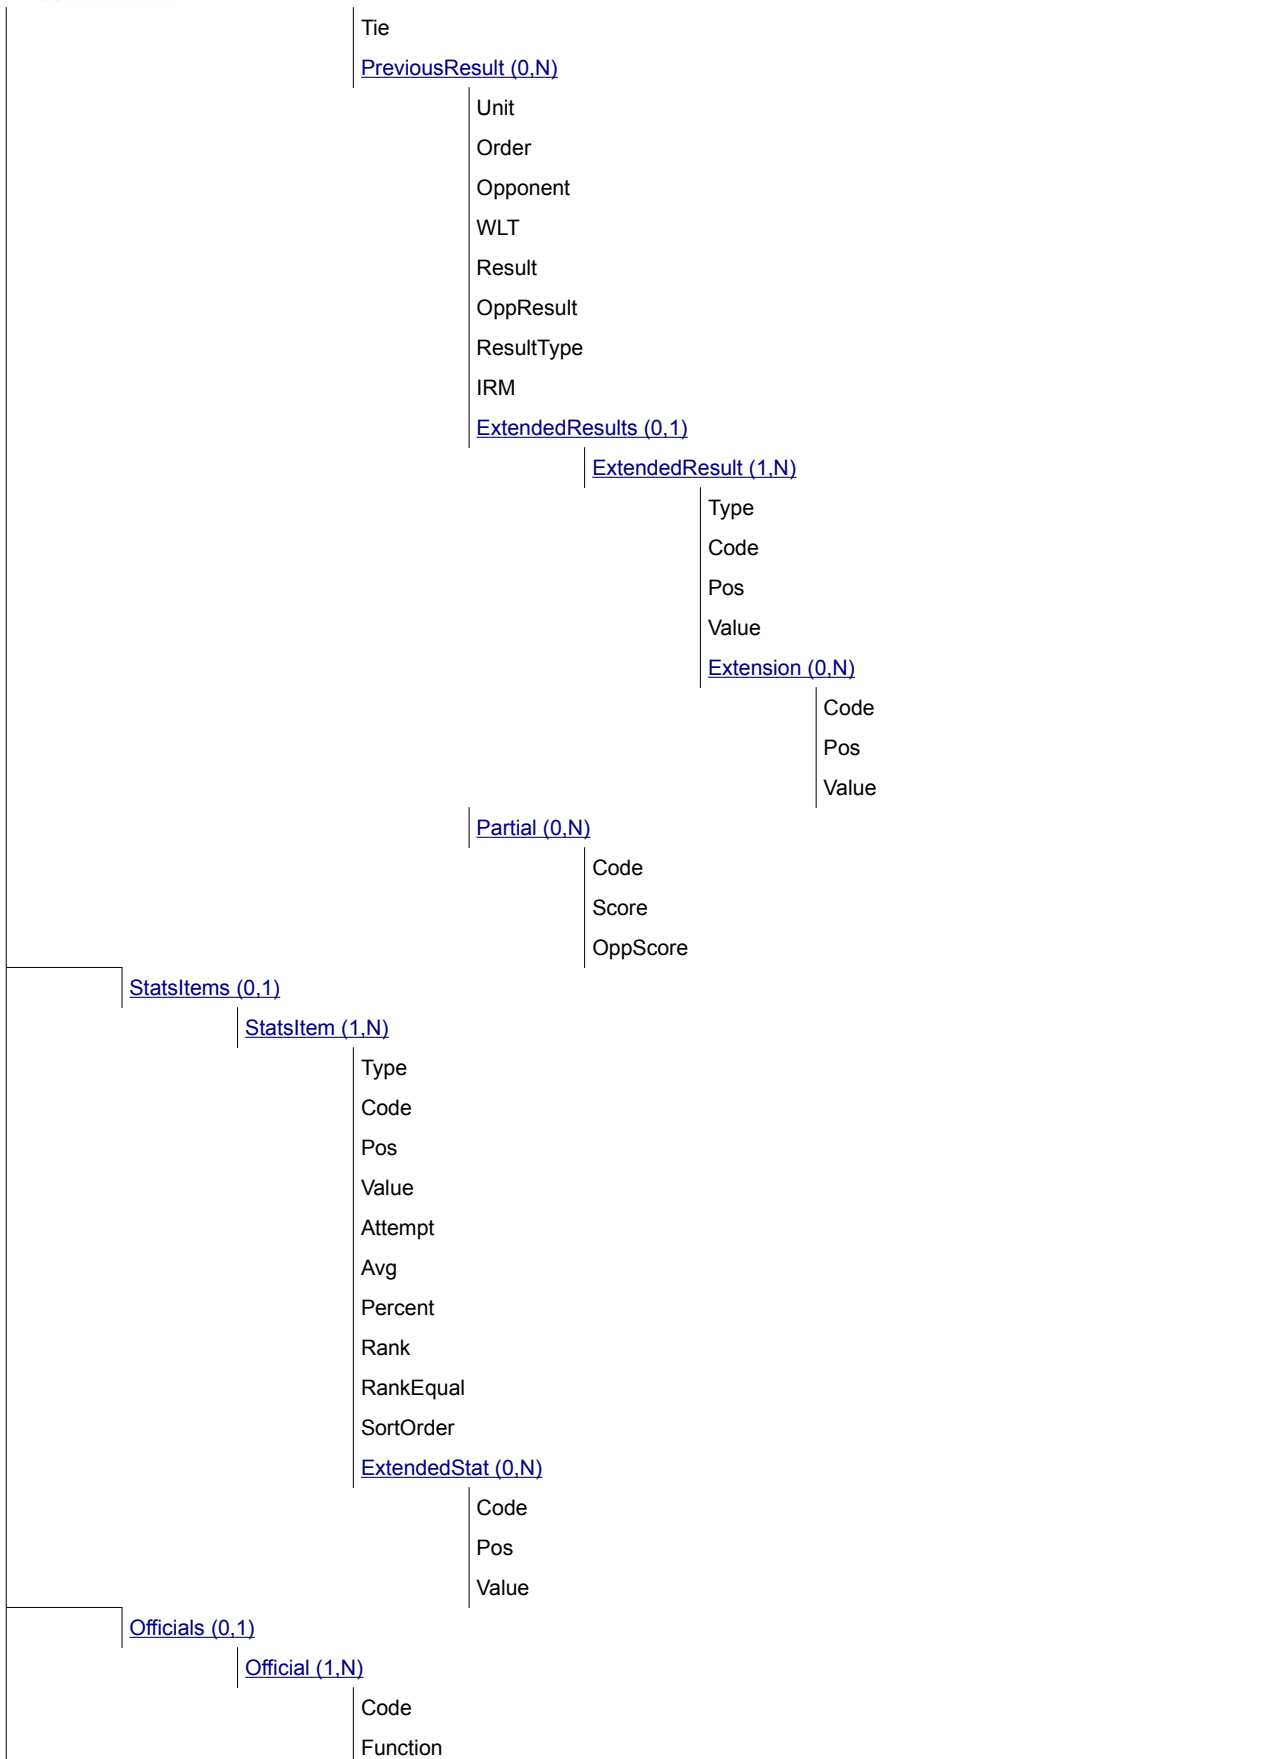





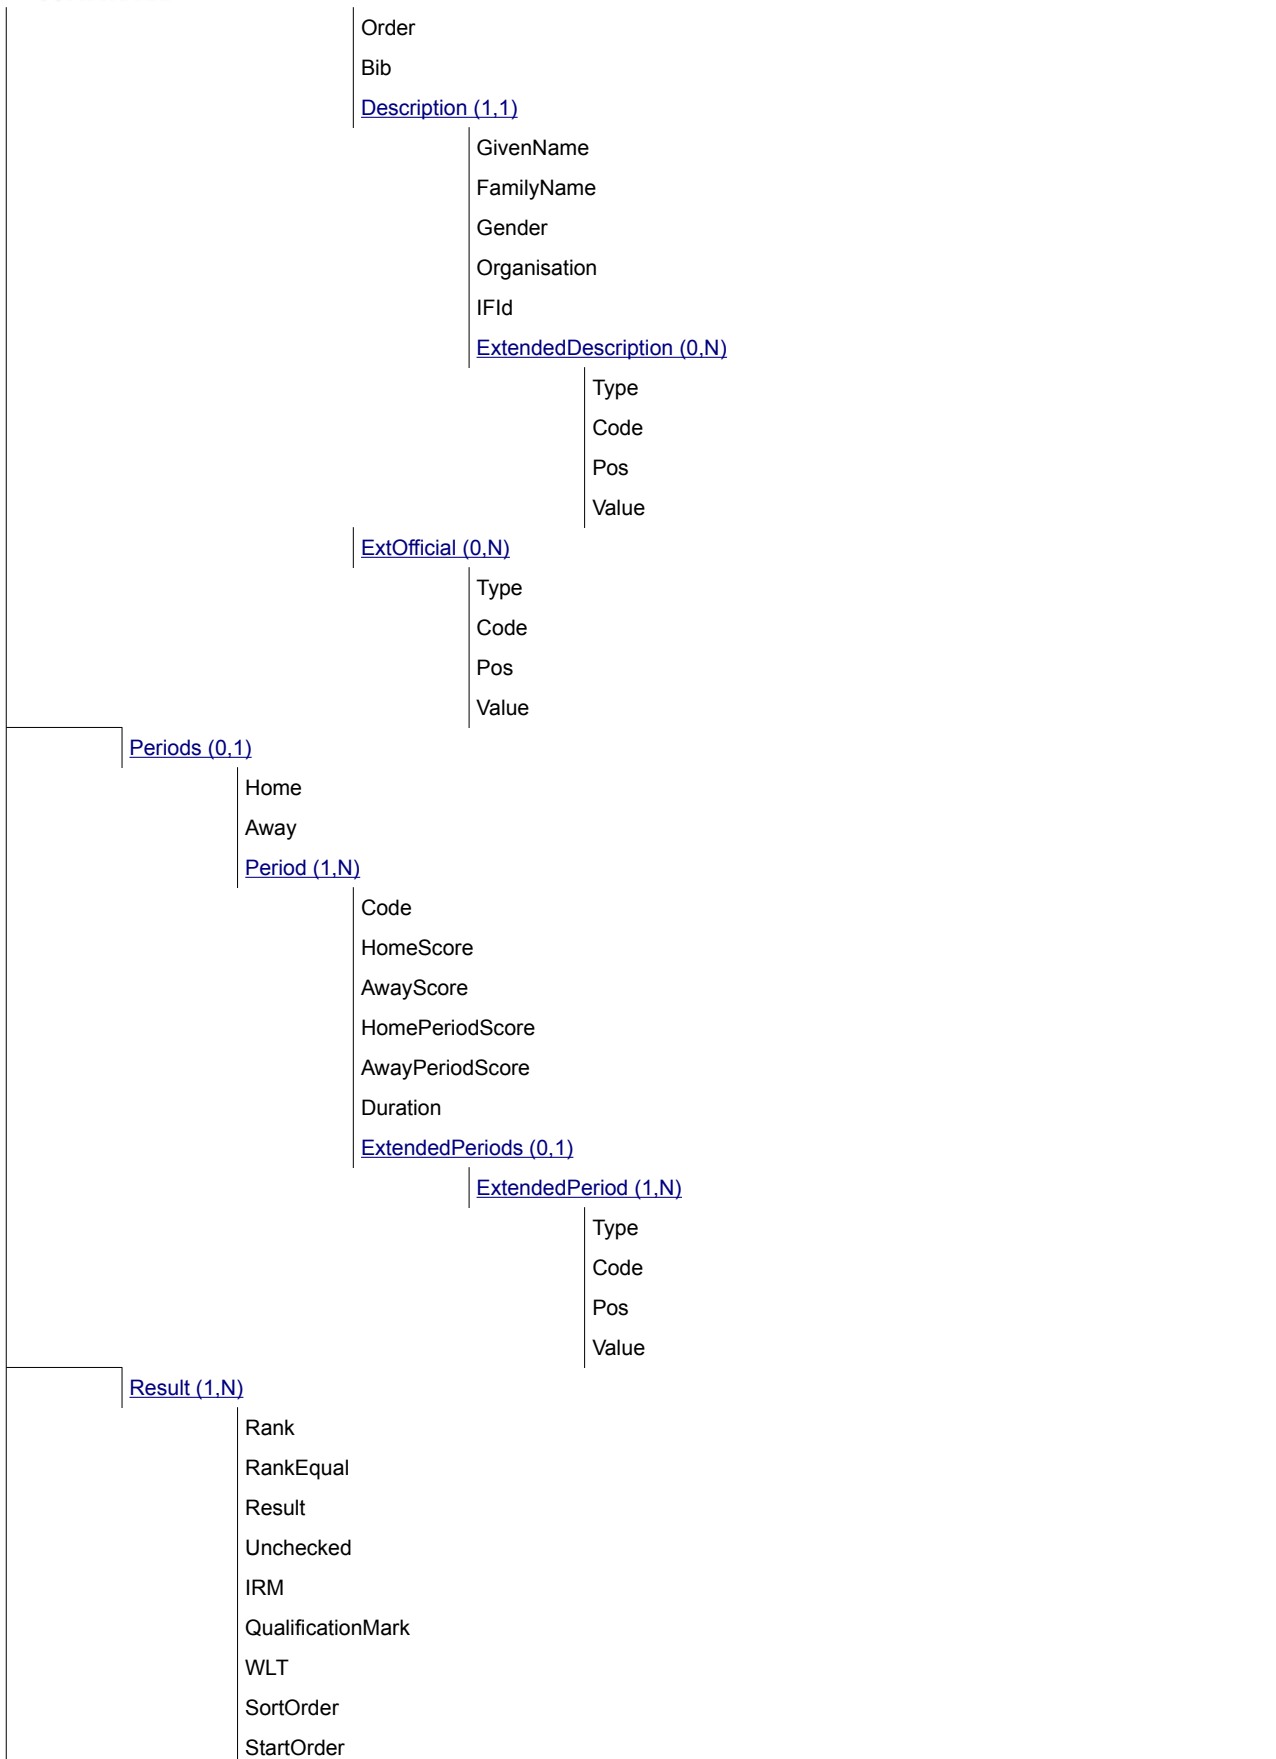


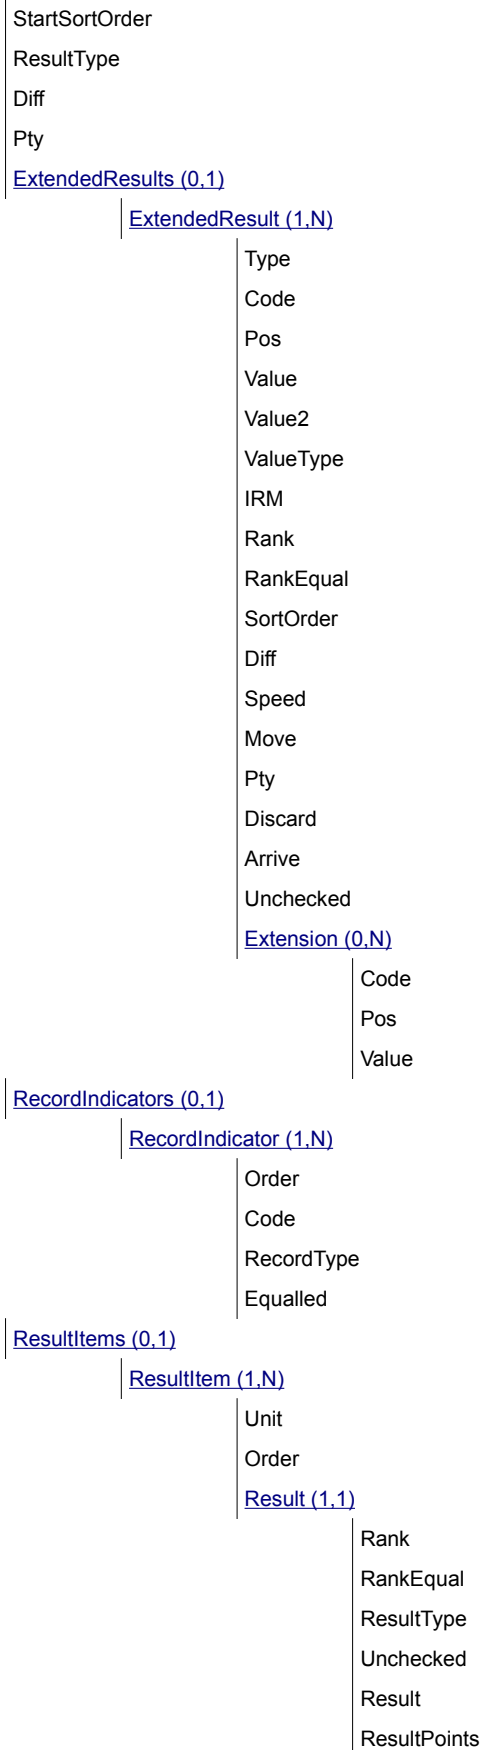


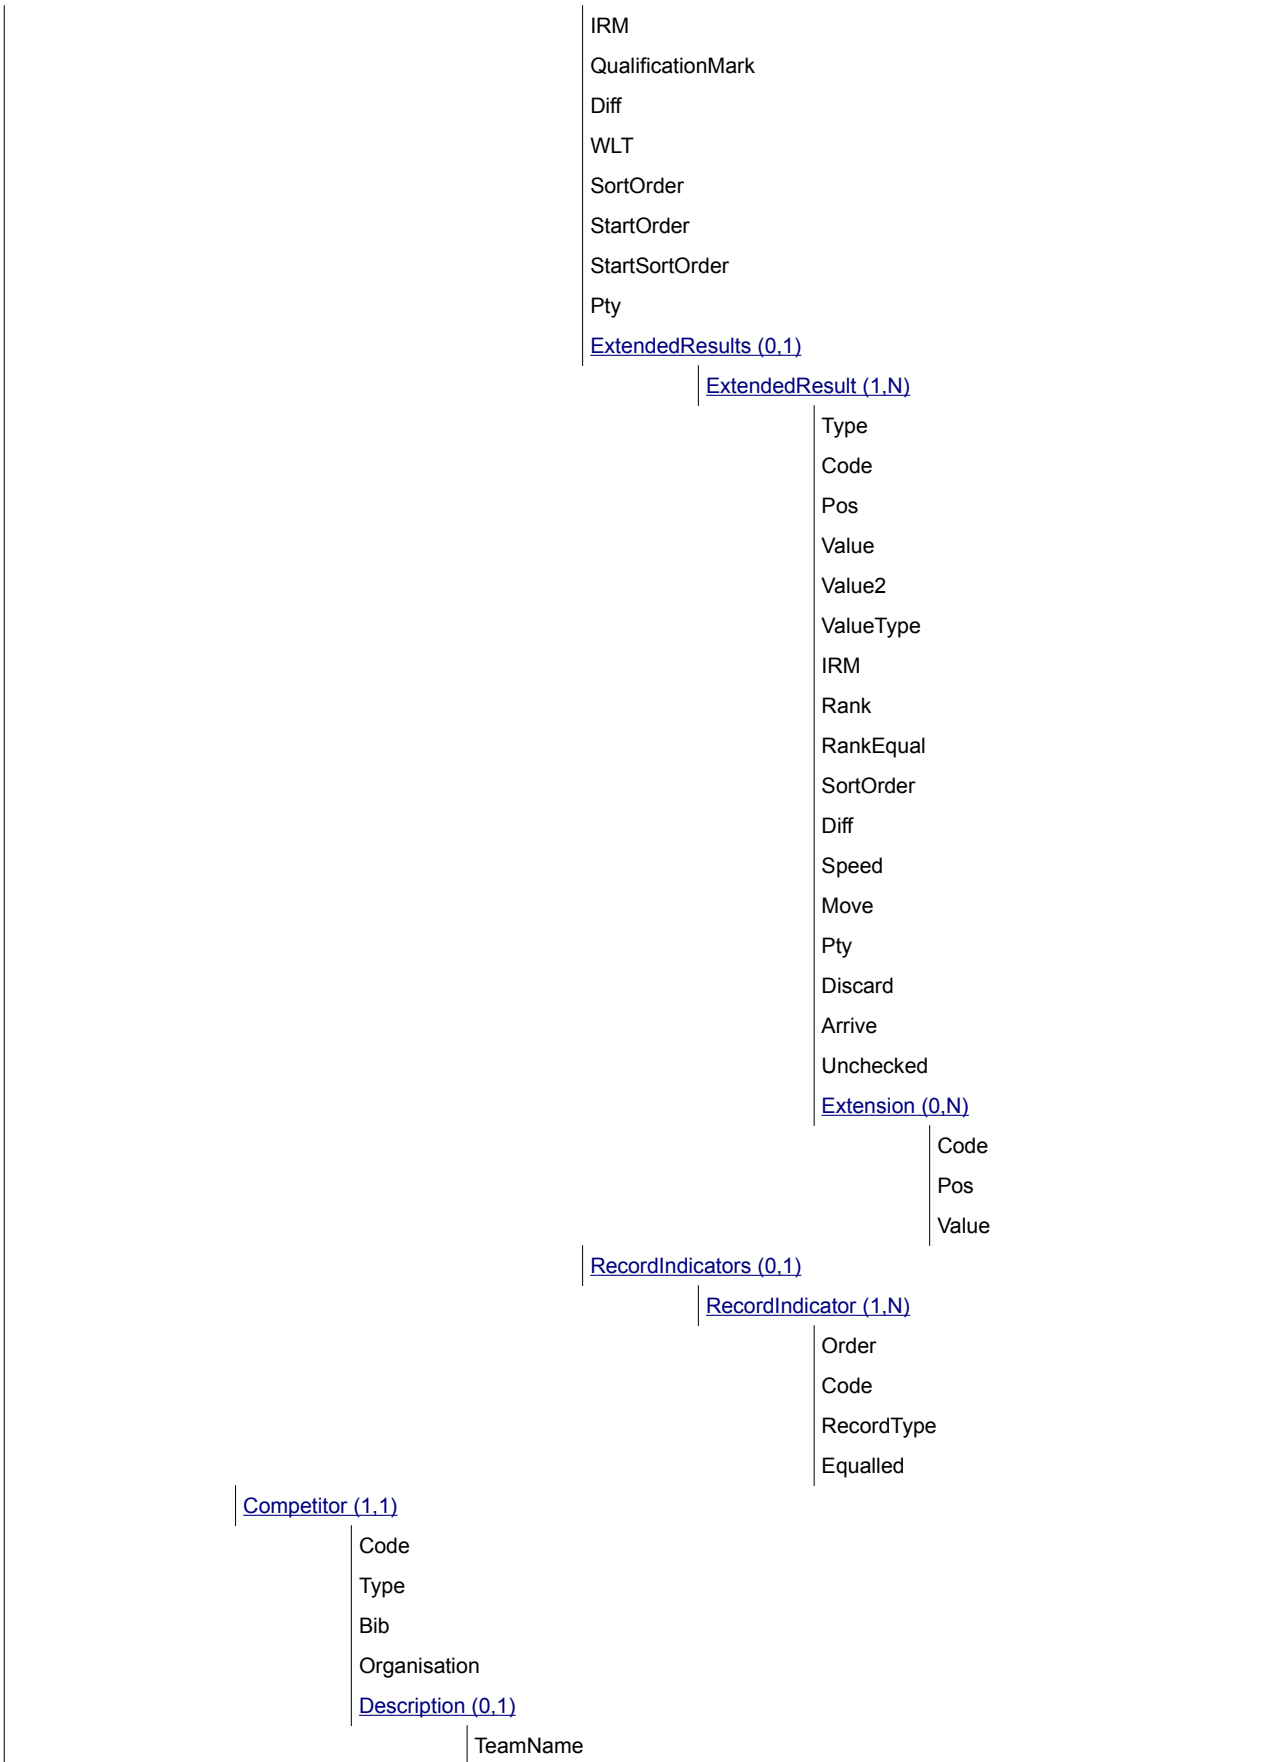

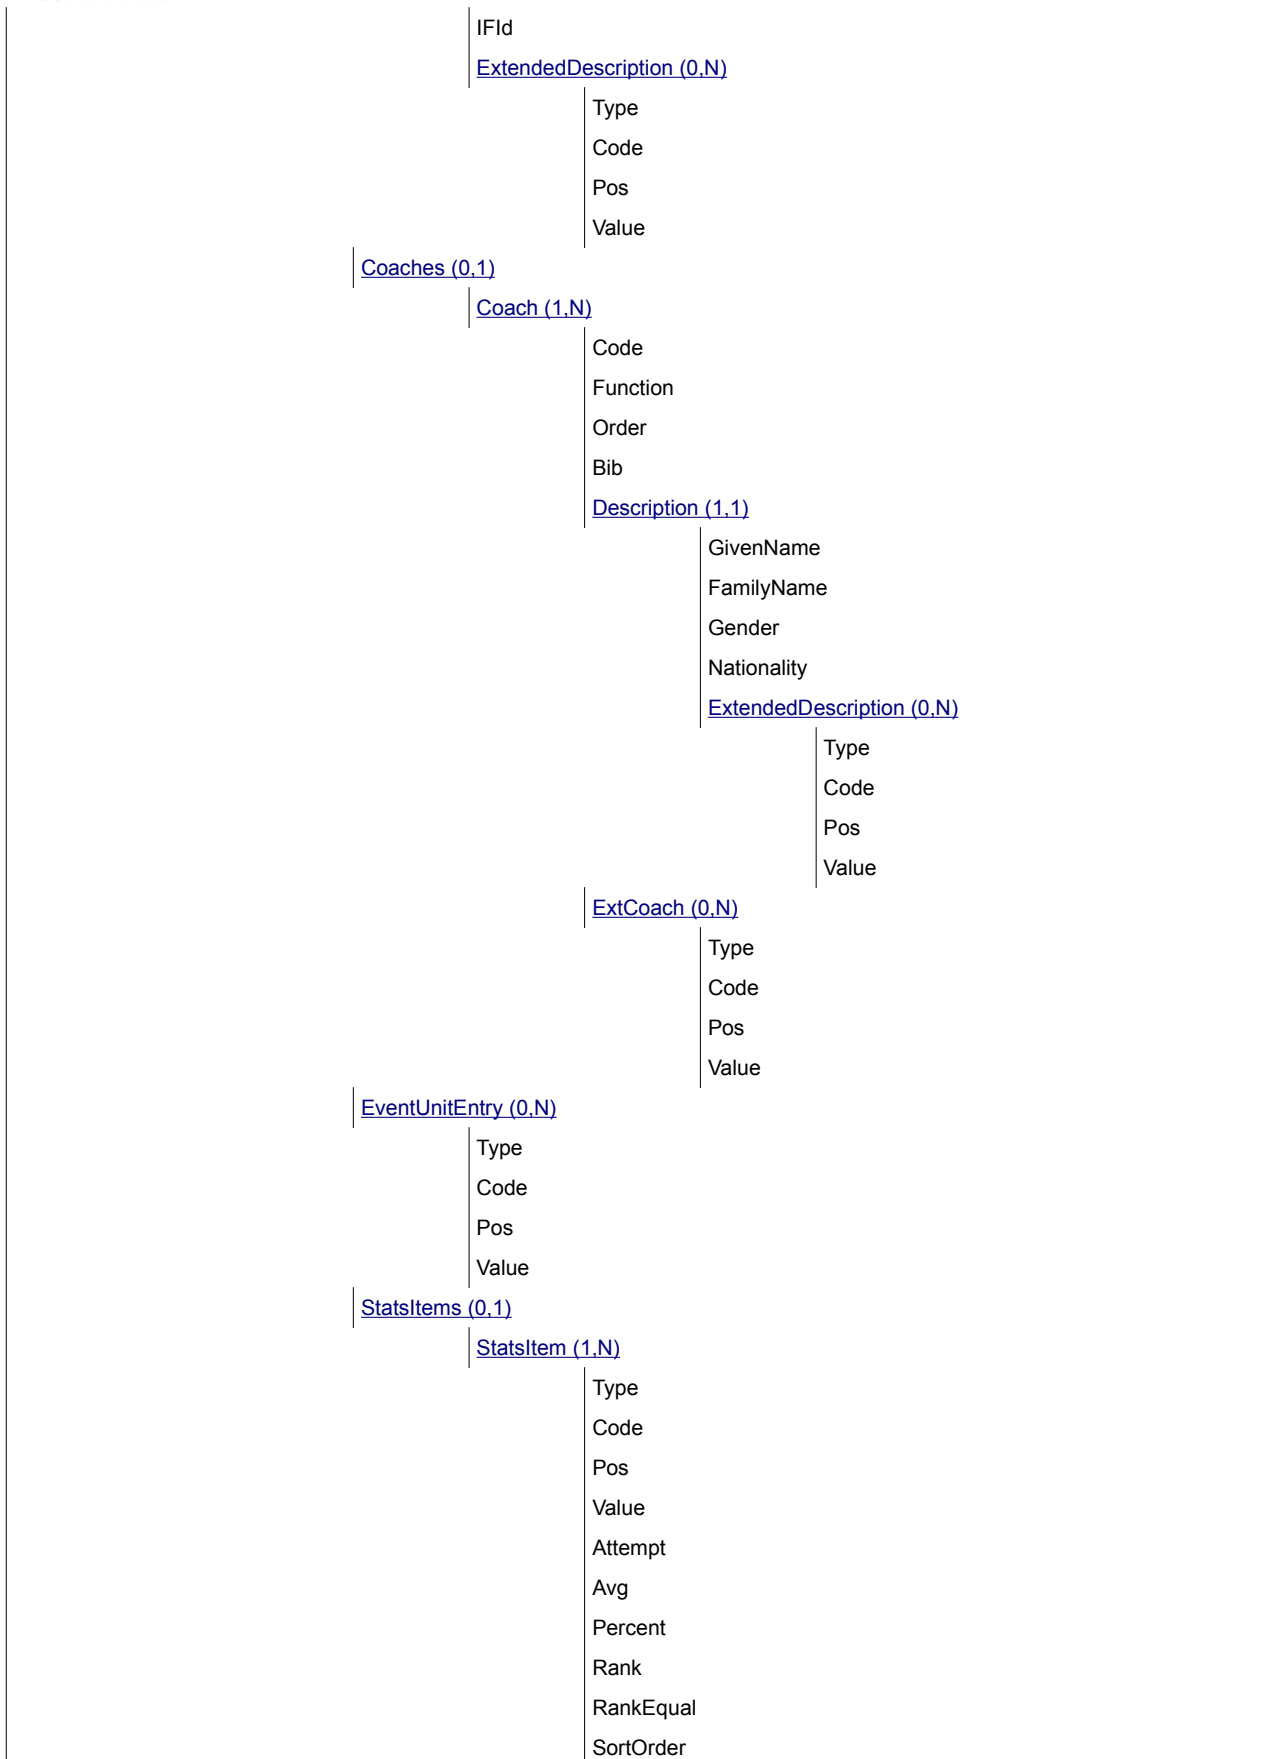

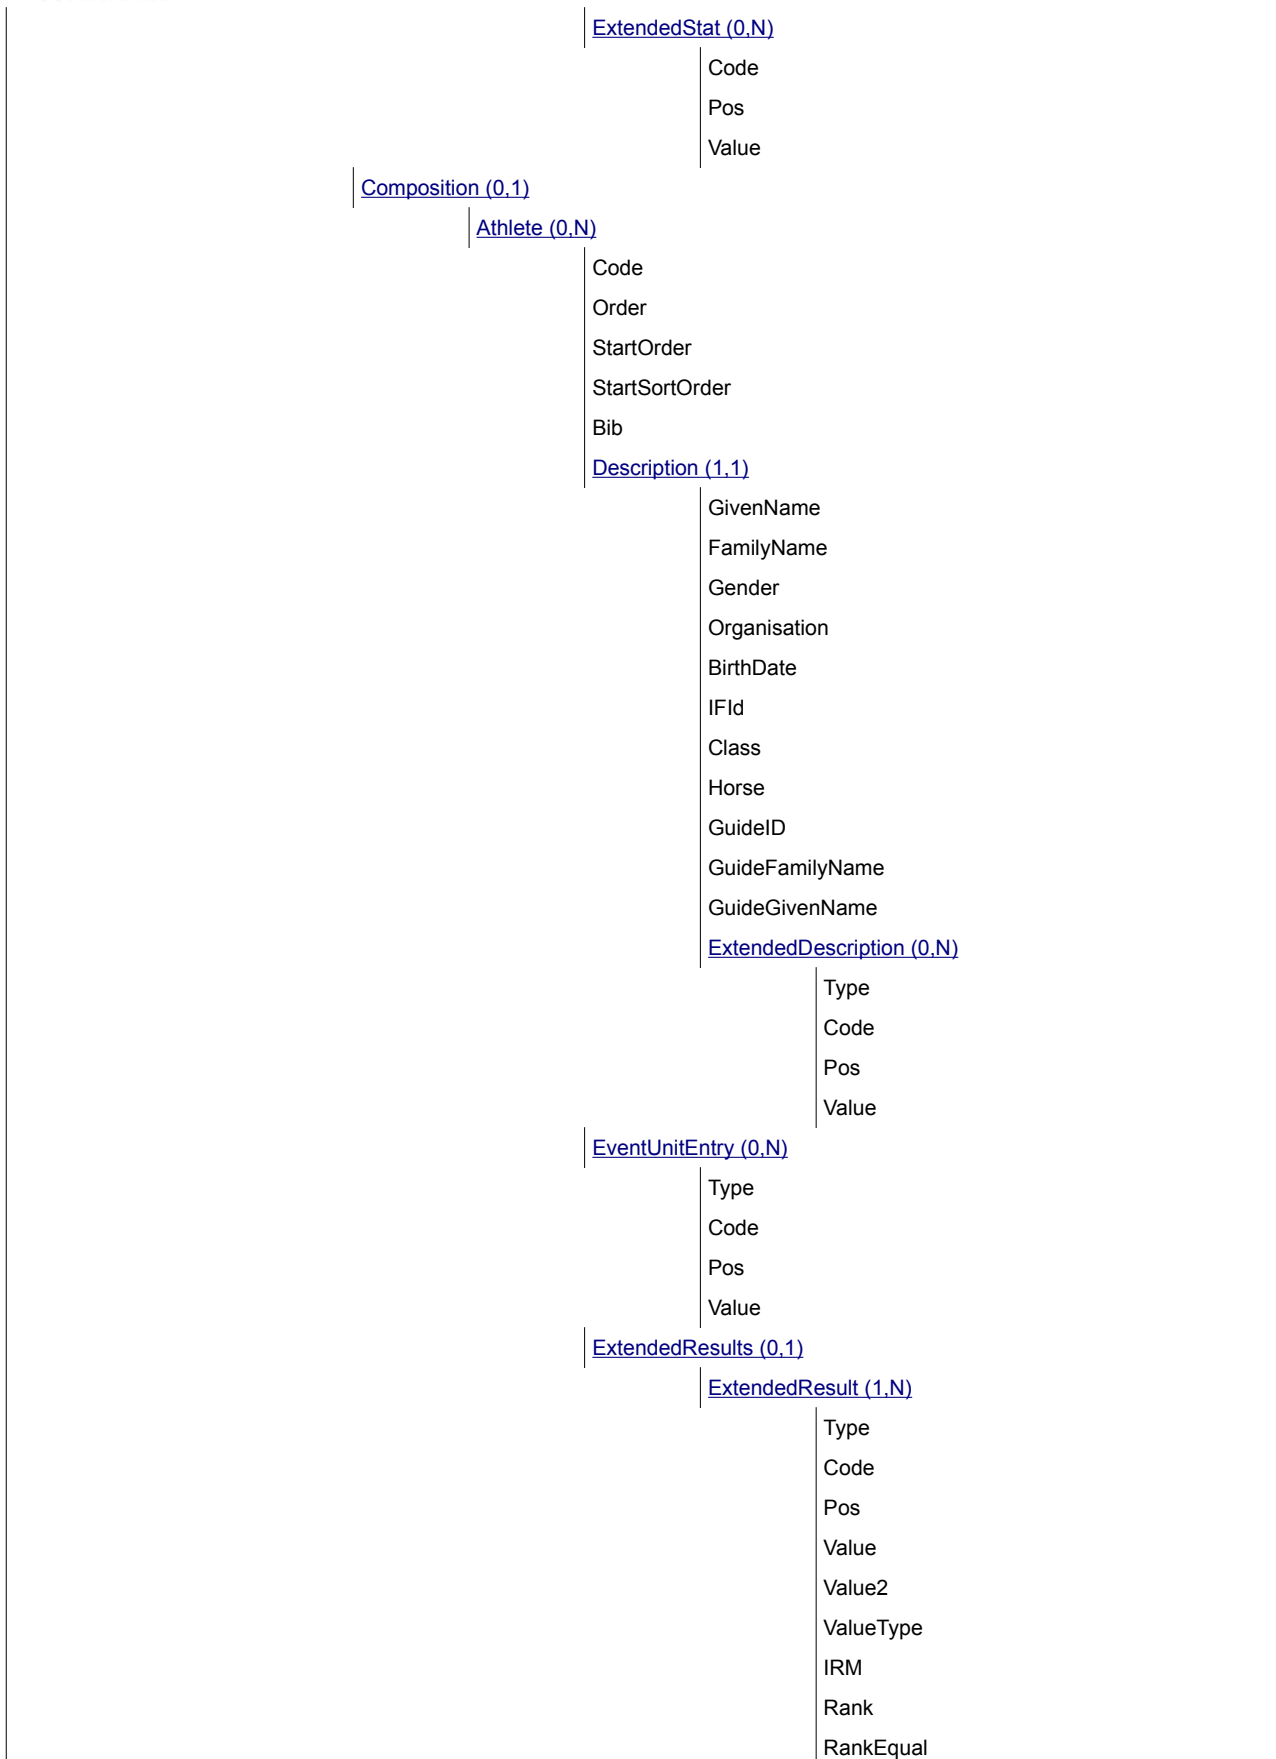

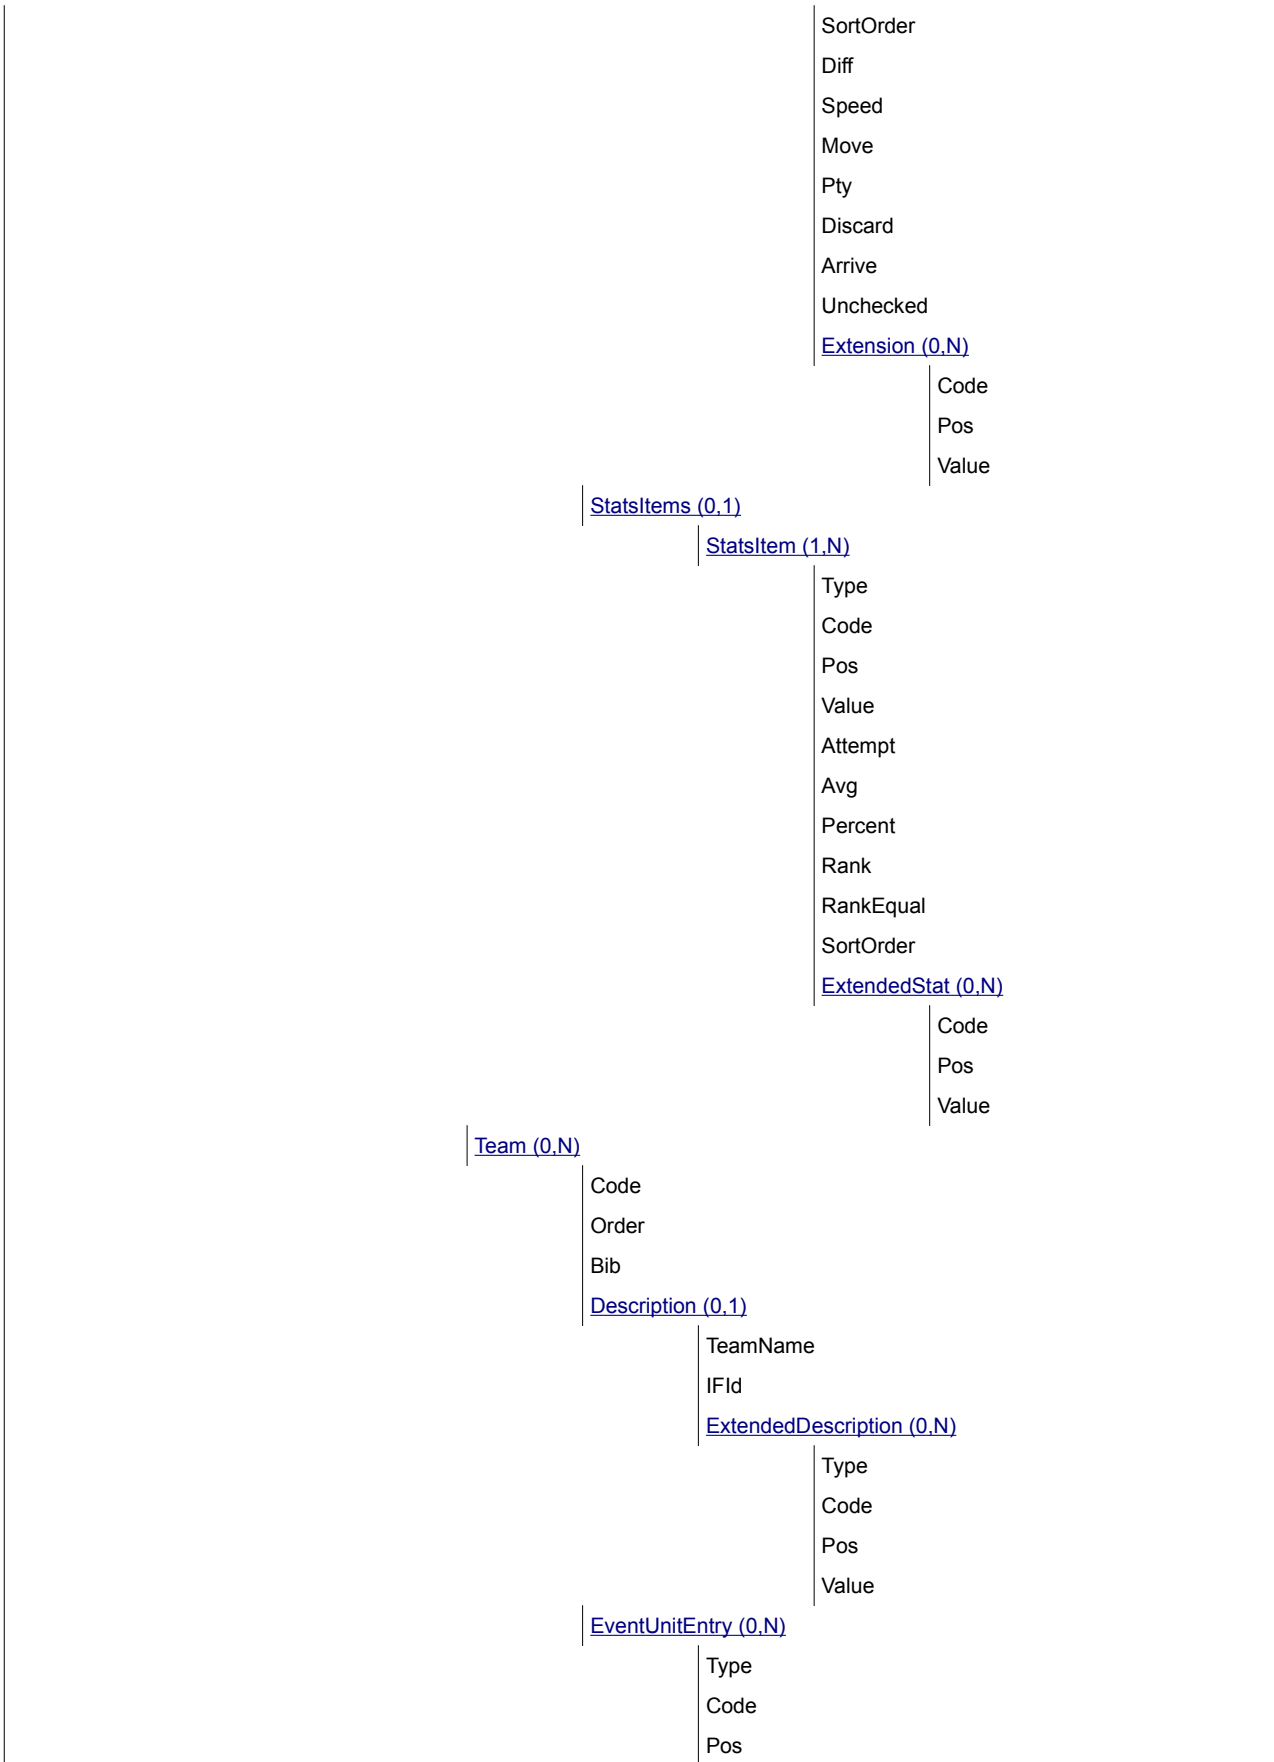

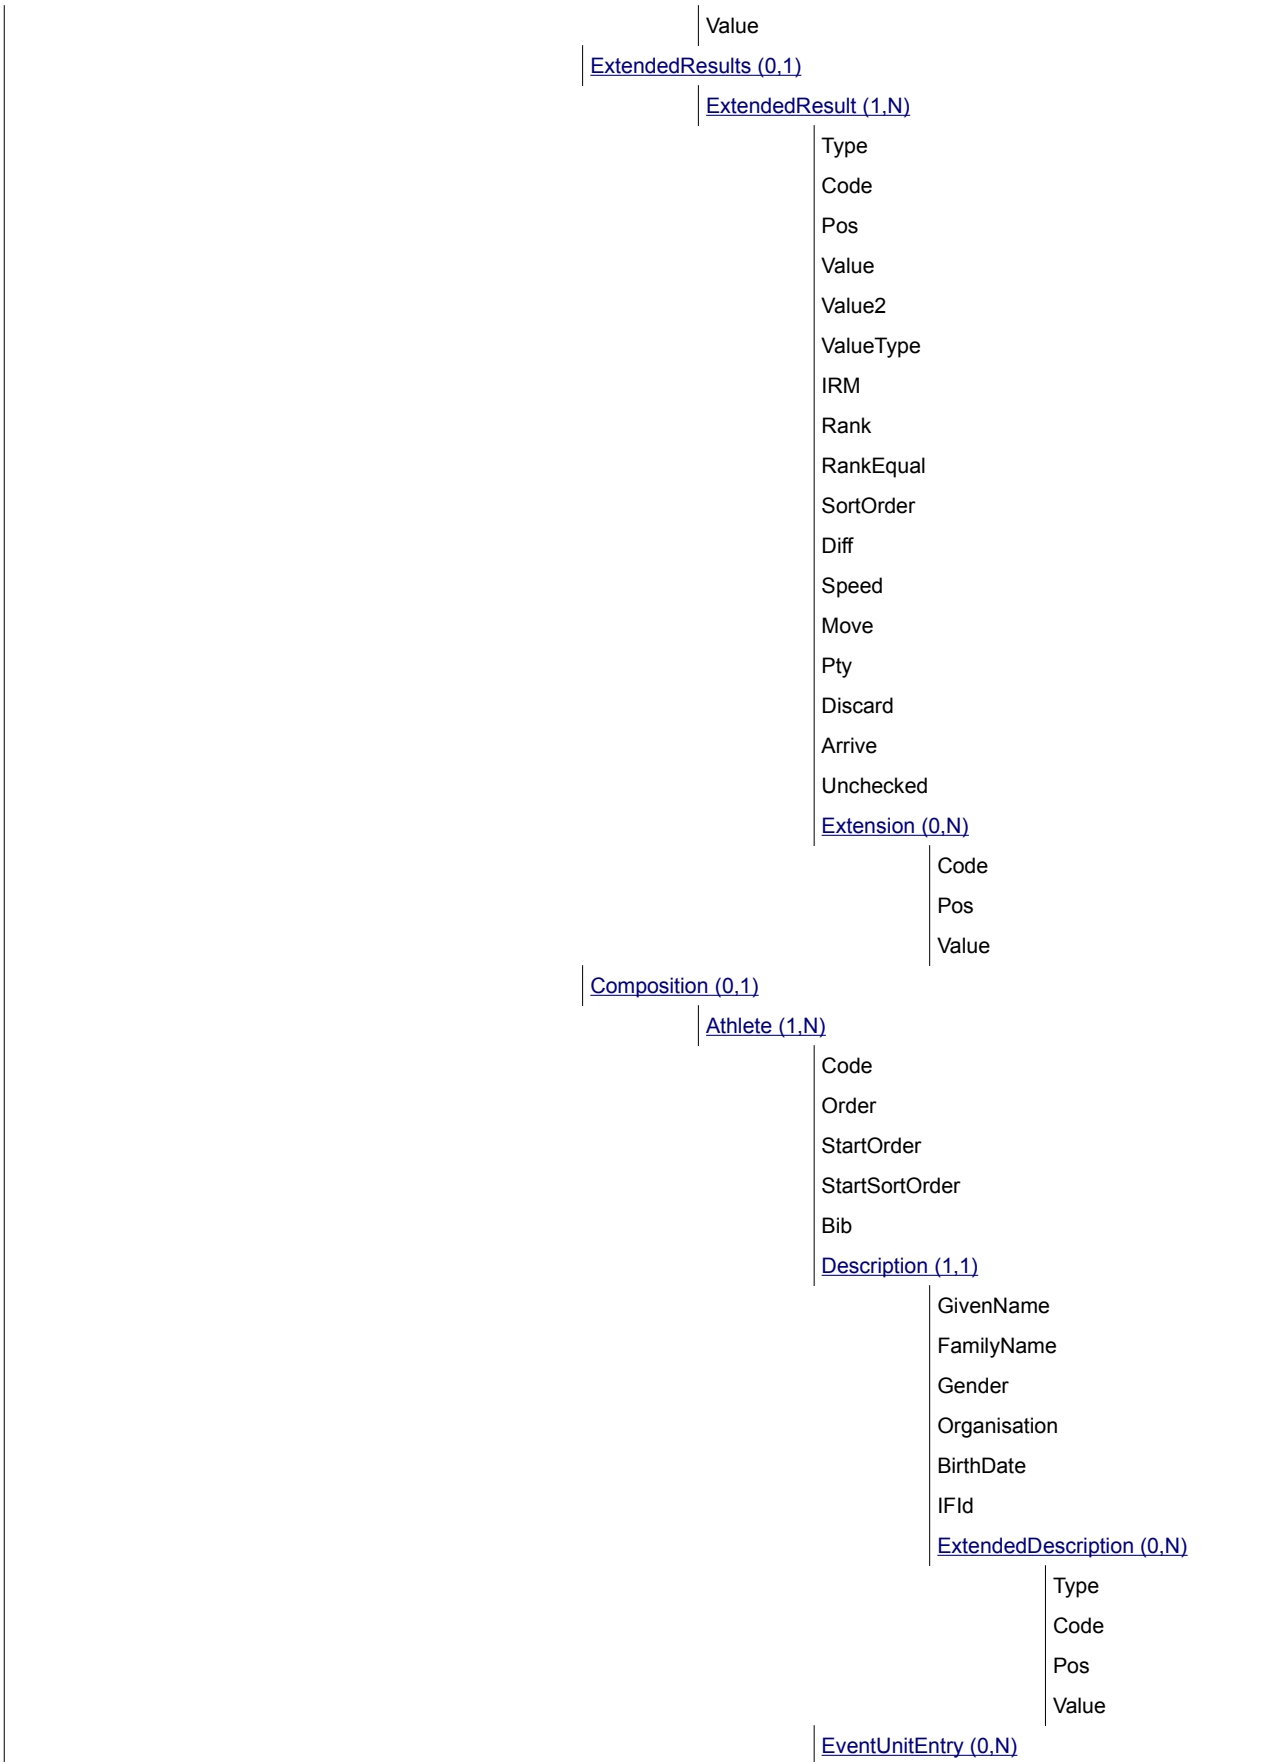



	Type
	Code
	Pos
	Value
	<a href="#">ExtendedResults (0.1)</a>
	<a href="#">ExtendedResult (1.N)</a>
	Type
	Code
	Pos
	Value
	Value2
	ValueType
	IRM
	Rank
	RankEqual
	SortOrder
	Diff
	Speed
	Move
	Pty
	Discard
	Arrive
	Unchecked
	<a href="#">Extension (0.N)</a>
	Code
	Pos
	Value

### 2.1.6.5 Message Values

Element Competition (0,1)			
Attribute	M/O	Value	Description
Gen	O	S(20)	Version of the General Data Dictionary applicable to the message
Sport	O	S(20)	Version of the Sport Data Dictionary applicable to the message
Codes	O	S(20)	Version of the Codes applicable to the message

Element ExtendedInfos /UnitDateTime (0,1)			
Actual start date and time / end date and time. (do not include until unit starts)			
Actual start and/or end dates and times.			
Attribute	M/O	Value	Description
StartDate	O	DateTime	Actual start date and time. For multi-day units, the start time is on the first day. (do not include until unit has started)
EndDate	O	DateTime	Actual end date-time (The attribute should only be included when required in the particular sport). Generally do not include.





Duration	O	h:mm	Duration of the unit as defined in the sport.
----------	---	------	---

Table comment: Attribute to be set Mandatory from Optional or redefined. Refer to the ODF Sport Data Dictionary for each of the disciplines

Element ExtendedInfos /ExtendedInfo (0,N)			
Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element ExtendedInfos /ExtendedInfo /Extension (0,N)			
Attribute	M/O	Value	Description
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element ExtendedInfos /ExtendedInfo /Competitor (0,N)			
Attribute	M/O	Value	Description
Organisation	O	<a href="#">CC @Organisation</a>	Organisations ID
Order	O	Numeric	Order of the competitor associated to the ExtendedInfo, if more than one competitor associated. Send 1 if only one.

Element ExtendedInfos /ExtendedInfo /Competitor /Composition /Athlete (1,N)			
Used when the ExtendedInfo is related to a person or a team member. The FamilyName and GivenName because, in many cases, the person related to the ExtendedInfo is not an athlete.			
Attribute	M/O	Value	Description
FamilyName	M	S(25)	Family name of the person associated to the ExtendedInfo.  This person may not be appearing in the List of athletes by discipline message. For this reason a @Code attribute is not possible.
GivenName	O	S(25)  See table comment	Given name of the person associated to the ExtendedInfo  This person may not be appearing in the List of athletes by discipline message. For this reason a @Code attribute is not possible.

Table comment: Attribute to be set Mandatory from Optional or redefined. Refer to the ODF Sport Data Dictionary for each of the disciplines

Element ExtendedInfos /SportDescription (0,1)			
Sport Descriptions in Text.			
Attribute	M/O	Value	Description
DisciplineName	M	S(40)	Discipline name (not code) from Common Codes
EventName	M	S(40)	Event name (not code) from Common Codes
Gender	M	CC @SportGender	Gender code for the event unit
SubEventName	O	S(40)	EventUnit short name (not code) from Common Codes

UnitNum	O	S(15)	Match / Game / Bout / Race Number or similar if applicable
---------	---	-------	--

Element ExtendedInfos /VenueDescription (0,1)			
Venue Names in Text.			
Attribute	M/O	Value	Description
Venue	M	<a href="#">CC @VenueCode</a>	Venue Code
VenueName	M	S(25)	Venue Description (not code) from Common Codes
Location	M	<a href="#">CC @Location</a>	Location code
LocationName	M	S(30)	Location Description (not code) from Common Codes
Attendance	O	#####0	Total attendance (do not send if unknown)

Element ExtendedInfos /PreviousResults (0,N)			
Attribute	M/O	Value	Description
Code	M	S(20) with no leading zeroes	Competitor's ID
Win	O	See sport specific definition	Number of matches won
Loss	O	See sport specific definition	Number of matches lost
Tie	O	See sport specific definition	Number of matches tied

Table comment: Attribute to be set Mandatory from Optional or redefined. Refer to the ODF Sport Data Dictionary for each of the disciplines

Element ExtendedInfos /PreviousResults /PreviousResult (0,N)			
Attribute	M/O	Value	Description
Unit	M	S(40)	Full RSC of the previous event unit
Order	M	Numeric #0	Order of the units
Opponent	O	S(20) with no leading zeroes	Competitor ID of the opponent
WLT	O	S(1)	Indicates if the competitor at PreviousResults/Code is the winner (W), loser (L) or tied (T)
Result	O	See sport specific definition	
OppResult	O	See sport specific definition	
ResultType	O	See sport specific definition	
IRM	O	See sport specific definition	

Table comment: Attribute to be set Mandatory from Optional or redefined. Refer to the ODF Sport Data Dictionary for each of the disciplines

Element ExtendedInfos /PreviousResults /PreviousResult /ExtendedResults /ExtendedResult (1,N)			
Attribute	M/O	Value	Description
Type	M	See sport specific definition	
Code	M	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Table comment: Attribute to be set Mandatory from Optional or redefined. Refer to the ODF Sport Data Dictionary for each of the disciplines

Element ExtendedInfos /PreviousResults /PreviousResult /ExtendedResults /ExtendedResult /Extension (0,N)			
Attribute	M/O	Value	Description
Code	M	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Table comment: Attribute to be set Mandatory from Optional or redefined. Refer to the ODF Sport Data Dictionary for each of the disciplines

### Sample (Tennis)

```
<PreviousResults Code="123456" Win="2" Loss="0">
  <PreviousResult Unit="TENWSINGLES-----R64-0001----" Order="1" Opponent="2222" WLT="W" Result="2"
  OppResult="0">
    <Partial Code="S1" Score="6" OppScore="3" />
    <Partial Code="S2" Score="6" OppScore="2" />
  </PreviousResult>
  <PreviousResult Unit="TENWSINGLES-----R32-0002----" Order="2" Opponent="4444" WLT="W" Result="2"
  OppResult="1">
    <Partial Code="S1" Score="6" OppScore="3" />
    <Partial Code="S2" Score="3" OppScore="6" />
    <Partial Code="S2" Score="6" OppScore="0" />
  </PreviousResult>
</PreviousResults>
```

### Sample (Basketball)

```
<PreviousResults Code="BKBWTEAM5---FRA01" Win="2" Loss="1">
  <PreviousResult Unit="BKBWTEAM5-----GPA-0001----" Order="1" Opponent="BKBWTEAM5---NZL01"
  WLT="W" Result="76" OppResult="76" />
  <PreviousResult Unit="BKBWTEAM5-----GPA-0004----" Order="2" Opponent="BKBWTEAM5---USA01"
  WLT="L" Result="75" OppResult="77" />
  <PreviousResult Unit="BKBWTEAM5-----GPA-0007----" Order="3" Opponent="BKBWTEAM5---RSA01"
  WLT="W" ResultType="IRM" IRM="DSQ" />
</PreviousResults>
```

### Sample (Wrestling)

```
<PreviousResults Code="123456" Win="2" Loss="0">
  <PreviousResult Unit="WREW59K-----R32-0001----" Order="1" Opponent="2222" WLT="W" Result="5"
  OppResult="0"/>
  <PreviousResult Unit="WREW59K-----8FNL0001----" Order="2" Opponent="4444" WLT="W" Result="4"
  OppResult="0"/>
</PreviousResults>
```

Element ExtendedInfos /PreviousResults /PreviousResult /Partial (0,N)			
Attribute	M/O	Value	Description
Code	M	See sport specific redefinition	
Score	O	See sport specific redefinition	Usually for the competitor in the period

OppScore	O	See sport specific redefinition	Usually for the opposing competitor in the period
----------	---	---------------------------------	---

Table comment: Attribute to be set Mandatory from Optional or redefined. Refer to the ODF Sport Data Dictionary for each of the disciplines

Element Competition /StatsItems /StatsItem (1,N)			
Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	
Attempt	O	See sport specific definition	
Avg	O	See sport specific definition	Related to average
Percent	O	See sport specific definition	Related to Percentage
Rank	O	See sport specific definition	Rank for this statistic
RankEqual	O	S(1)	Send Y where Rank for this statistic is equalled else not sent.
SortOrder	O	See sport specific definition	Similar to rank but considering all data for this statistic

Table comment: Attribute to be set Mandatory from Optional or redefined. Refer to the ODF Sport Data Dictionary for each of the disciplines

Element Competition /StatsItems /StatsItem /ExtendedStat (0,N)			
Attribute	M/O	Value	Description
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Table comment: Attribute to be set Mandatory from Optional or redefined. Refer to the ODF Sport Data Dictionary for each of the disciplines

Element Officials /Official (1,N)			
Officials in the case there are officials receiving events medals.			
Attribute	M/O	Value	Description
Code	M	S(20) with no leading zeroes	Official's code
Function	M	See table comment	Official's function (example: referee, etc.).  Can be different from the function sent in the DT_PARTIC message.
Order	O	See table comment	Official's order (if the discipline specificity required it).
Bib	O	See table comment	Official's Bib number

Table comment: Attribute to be set Mandatory from Optional or redefined. Refer to the ODF Sport Data Dictionary for each of the disciplines

Element Officials /Official /Description (1,1)			
Officials extended information.			
Attribute	M/O	Value	Description
GivenName	O	S(25)	Given name in WNPA format (mixed case)



FamilyName	M	S(25)	Family name in WNPA format (mixed case)
Gender	M	<a href="#">CC @PersonGender</a>	Gender of the official
Organisation	M	<a href="#">CC @Organisation</a>	Officials' organisation
IFId	O	S(16)	International Federation ID

Element Officials /Official /Description /ExtendedDescription (0,N)			
Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element Officials /Official /ExtOfficial (0,N)			
Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element Periods (0,1)			
Attribute	M/O	Value	Description
Home	O	S(20) with no leading zeroes	Home Competitor ID
Away	O	S(20) with no leading zeroes	Away Competitor ID

Element Periods /Period (1,N)			
Period in which the event unit message arrives.			
Attribute	M/O	Value	Description
Code	M	See table comment	Period's code
HomeScore	M	See table comment	Overall score of the home competitor at the end of the period
AwayScore	M	See table comment	Overall score of the away competitor at the end of the period
HomePeriodScore	O	See table comment	Score of the home competitor just for this period
AwayPeriodScore	O	See table comment	Score of the away competitor just for this period
Duration	O	See table comment	Duration of the period

Table comment: Attribute to be set Mandatory from Optional or redefined. Refer to the ODF Sport Data Dictionary for each of the disciplines

Element Periods /Period /ExtendedPeriods /ExtendedPeriod (1,N)			
ExtendedPeriod information.			
Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	



<b>Element Result (1,N)</b>			
<b>For each Event Unit Results message, there must be at least one competitor being awarded with a result element in the event unit.</b>			
<b>Attribute</b>	<b>M/O</b>	<b>Value</b>	<b>Description</b>
Rank	O	Text  See table comment	Rank of the competitor
RankEqual	O	S(1)	Identifies if a rank has been equalled. Send Y if applicable else not sent.
Result	O	See table comment	The result of the competitor in the event unit
Unchecked	O	See table comment	Send with ="Y" in the case that there is a value which needs to be validated. For example by reading photo to change from transponder times. Do not send if not ="Y"
IRM	O	See table comment	The invalid result mark, in case it is assigned
QualificationMark	O	See table comment	Indicates the qualification of the competitor for the next round of the competition
WLT	O	See table comment	The code whether a competitor won, lost or tied the match / game
SortOrder	M	Numeric  See table comment	Used to sort all the results of an event unit  Before the start of any event unit this will be the same as the StartSortOrder and is used as the primary sort except in the case where a Rank is available (from earlier event units) and in this case the SortOrder will consider Rank in the same way as if the competition had already started.  During the event unit any sort order change from the initial start list order for any competitor will be provided in this attribute regardless the competitor is ranked or not.
StartOrder	O	Numeric  See table comment	Competitor's start order
StartSortOrder	M	Numeric  See table comment	Used to sort all start list competitors in an event unit.
ResultType	O	See table comment	Type of the @Result attribute.
Diff	O	See table comment	Display the time / value behind the leader. All fill when applicable, 0.0 for leader, negative for in front of leader, positive for behind. For example +3.45 means 3.45 sec behind the leader, -1.23 means -1.23 sec in front of (better than) the leader.
Pty	O	See table comment	Penalty information

Table comment: Attribute to be set Mandatory from Optional or redefined. Refer to the ODF Sport Data Dictionary for each of the disciplines

<b>Element Result /ExtendedResults /ExtendedResult (1,N)</b>			
<b>Attribute</b>	<b>M/O</b>	<b>Value</b>	<b>Description</b>
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	



Value2	O	See sport specific definition	
ValueType	O	See sport specific definition	ValueType should be used to describe the type of data @Value
IRM	O	See sport specific definition	Send appropriate IRM code if IRM at this ExtendedResult
Rank	O	See sport specific definition	Rank of the competitor for this specific ExtendedResult.
RankEqual	O	S(1)	Send Y where Rank at this specific ExtendedResult is equalled else not sent.
SortOrder	O	See sport specific definition	Similar to rank but considering all competitors (those with IRM or no rank at this ExtendedResult)
Diff	O	See sport specific definition	Time/Points etc behind leader at this ExtendedResult
Speed	O	See sport specific definition	Speed at this ExtendedResult
Move	O	See sport specific definition	Change in rank compared to the previous ExtendedResult
Pty	O	See sport specific definition	
Discard	O	See sport specific definition	
Arrive	O	See sport specific definition	
Unchecked	O	S(1)	Send Y where the result @Value has not been appropriately validated (sport specific) else do not send.

**Element Result /ExtendedResults /ExtendedResult /Extension (0,N)**

Attribute	M/O	Value	Description
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

**Element Result /RecordIndicators /RecordIndicator (1,N)**

Result's record indicator.

Attribute	M/O	Value	Description
Order	M	Numeric	The hierarchy (priority) for types of record from 1 to n. Can use the Order column from CC @RecordType for reference).
Code	M	<a href="#">CC @RecordCode</a>	Code which describes the record broken by the result value.
RecordType	M	<a href="#">CC @RecordType</a>	Code which specifies the level at which the record is broken.
Equalled	O	S(1)	Send "Y" in the case that the record has been equalled else do not send.

**Element Result /ResultItems /ResultItem (1,N)**

Identifier of unit, for the item included the result summary. ResultItem /Result will be for one particular previous unit.

Attribute	M/O	Value	Description
Unit	M	See sport specific documentation	Unit code of the related sub-unit. It may be at phase or unit level.
Order	O	Numeric #0	Logical order of the sub-units, usually schedule order.

**Element Result /ResultItems /ResultItem /Result (1,1)**

For any Event Unit Results message, there should be at least one competitor being awarded a result for the event unit.

Attribute	M/O	Value	Description
Rank	O	Text See table comment	Rank of the competitor in the result for the event unit or phase identified by /ResultItems /ResultItem.
RankEqual	O	S(1)	Identifies if a rank has been equalled. Send Y if applicable else not sent.



ResultType	O	See table comment	Type of the @Result attribute for the event unit or phase identified by /ResultItems /ResultItem. This is relative the value in Result below.
Unchecked	O	See table comment	Send with ="Y" in the case that there is a value which needs to be validated. For example by reading photo to change from transponder times. Do not send if ="Y"
Result	O	See table comment	The result of the competitor in the event unit for the event unit or phase identified by /ResultItems /ResultItem. This is usually the 'raw' result but is detailed in each data dictionary.
ResultPoints	O	See table comment	If the 'raw' score is converted to points to calculate the overall result then put the points here.
IRM	O	See table comment	The invalid rank mark, in case it is assigned for the event unit or phase identified by /ResultItems /ResultItem
QualificationMark	O	See table comment	The code which gives an indication on the qualification of the competitor for the next round of the competition for the event unit or phase identified by /ResultItems /ResultItem
Diff	O	See table comment	Display the time / value behind the leader. All fill when applicable, 0.0 for leader, negative for in front of leader, positive for behind. For example +3.45 means 3.45 sec behind the leader, -1.23 means -1.23 sec in front of (better than) the leader.
WLT	O	See table comment	The code whether a competitor won, lost or tied the match / game for the event unit identified by /ResultItems /ResultItem. It just applied to event units
SortOrder	M	Numeric ##0	Used to sort all results in an event unit or phase identified by /ResultItems /ResultItem
StartOrder	O	See table comment	Start order for display if applicable
StartSortOrder	O	See table comment	Order at the start for sorting, not display.
Pty	O	See table comment	Penalty information

Table comment: Attribute to be set Mandatory from Optional or redefined. Refer to the ODF Sport Data Dictionary for each of the disciplines

Element Result /ResultItems /ResultItem /Result /ExtendedResults /ExtendedResult (1,N)			
Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	
Value2	O	See sport specific definition	
ValueType	O	See sport specific definition	ValueType should be used to describe the type of data @Value
IRM	O	See sport specific definition	end appropriate IRM code if IRM at this ExtendedResult
Rank	O	See sport specific definition	Rank of the competitor for this specific ExtendedResult
RankEqual	O	S(1)	Send Y where Rank at this specific ExtendedResult is equalled else not sent.
SortOrder	O	See sport specific definition	Similar to rank but considering all competitors (those with IRM or no rank at this ExtendedResult
Diff	O	See sport specific definition	Time/Points etc behind leader at this ExtendedResult
Speed	O	See sport specific definition	Speed at this ExtendedResult
Move	O	See sport specific definition	Change in rank compared to the previous ExtendedResult
Pty	O	See sport specific definition	Penalty information
Discard	O	See sport specific definition	Used when data is to be discarded
Arrive	O	See sport specific definition	Related to arrival information





Unchecked	O	S(1)	Send Y where the result @Value has not been appropriately validated (sport specific) else do not send
-----------	---	------	---

**Element Result /ResultItems /ResultItem /Result /ExtendedResults /ExtendedResult /Extension (0,N)**

Extensions of ResultItem if required.

Attribute	M/O	Value	Description
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

**Element Result /ResultItems /ResultItem /Result /RecordIndicators /RecordIndicator (1,N)**

Result's record indicator.

Attribute	M/O	Value	Description
Order	M	Numeric	The hierarchy (priority) for types of record from 1 to n. Can use the Order column from CC @RecordType for reference).
Code	M	<a href="#">CC @RecordCode</a>	Code which describes the record broken by the result value.
RecordType	M	<a href="#">CC @RecordType</a>	Code which specifies the level at which the record is broken.
Equalled	O	Y	Send Y in the case that the record has been equalled else do not send.

**Element Result /Competitor (1,1)**

Competitor related to the result of one event unit.

Attribute	M/O	Value	Description
Code	M	S(20) with no leading zeroes or SC @CompetitorPlace	Competitor's ID or another indicator (SC @CompetitorPlace) which may include possible options of: TBD in case that the competitor is unknown at this time but will be available NOCOMP is sent when there is no competitor (and will not come later) BYE is used when there is a scheduled match of BYE.
Type	M	S(1)	A for athlete, T for team, H for Horse
Bib	O	See table comment	Bib number
Organisation	O	<a href="#">CC @Organisation</a>	Competitor's organisation

**Element Result /Competitor /Description (0,1)**

Competitors extended information.

Attribute	M/O	Value	Description
TeamName	M	S(73)	Name of the team. Only applies for teams / groups. Not usually for pairs (figure skating & beach volleyball are the exceptions).
IFId	O	S(16)	International Federation ID

**Element Result /Competitor /Description /ExtendedDescription (0,N)**

Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element Result /Competitor /Coaches /Coach (1,N)			
Competitor's Coach			
Attribute	M/O	Value	Description
Code	O	S(20) with no leading zeroes	Official code. This code is normally expected though there may be rare exceptions.
Function	O	See table comment	Official function
Order	O	See table comment	Coach order (if more than one coach is needed). Send 1 if only one.
Bib	O	See table comment	Official Bib number

Table comment: Attribute to be set Mandatory from Optional or redefined. Refer to the ODF Sport Data Dictionary for each of the disciplines

Element Result /Competitor /Coaches /Coach /Description (1,1)			
Coach extended information.			
Attribute	M/O	Value	Description
GivenName	O	S(25)	Given name in WNPA format (mixed case)
FamilyName	M	S(25)	Family name in WNPA format (mixed case)
Gender	M	<a href="#">CC @PersonGender</a>	Gender of the official
Nationality	M	<a href="#">CC @Country</a>	Coach's nationality

Element Result /Competitor /Coaches /Coach /Description /ExtendedDescription (0,N)			
Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element Result /Competitor /Coaches /Coach /ExtCoach (0,N)			
Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Table comment: Attribute to be set Mandatory from Optional or redefined. Refer to the ODF Sport Data Dictionary for each of the disciplines

Element Result /Competitor /EventUnitEntry (0,N)			
For team event information			
Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	



Element Result /Competitor /StatsItems /StatsItem (1,N)			
Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	
Attempt	O	See sport specific definition	
Avg	O	See sport specific definition	Related to average
Percent	O	See sport specific definition	Related to Percentage
Rank	O	See sport specific definition	Rank of the competitor for this statistic.
RankEqual	O	S(1)	Send Y where Rank for this statistic is equalled else not sent.
SortOrder	O	See sport specific definition	Similar to rank but considering all competitors for this statistic

Element Result /Competitor /StatsItems /StatsItem /ExtendedStat (0,N)			
Extended information for the statistics.			
Attribute	M/O	Value	Description
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element Result /Competitor /Composition /Athlete (0,N)			
Attribute	M/O	Value	Description
Code	M	S(20) with no leading zeroes	Athletes ID. Can belong to a team member or an individual athlete.
Order	M	Numeric	Order attribute used to sort team members in a team (if Competitor @Type="T") or 1 if Competitor @Type="A".
StartOrder	O	Numeric See table comment	Order of team members in a team (if Competitor @Type="T") on the start list. This is only used where the order changes from the start order to a different order during a competition or in results
StartSortOrder	O	Numeric	Order attribute used to sort team members in a team (if Competitor @Type="T") on the start list. This is only used where the order changes from the start order to a different order during a competition or in results
Bib	O	See table comment	Bib number

Table comment: Attribute to be set Mandatory from Optional or redefined. Refer to the ODF Sport Data Dictionary for each of the disciplines

Element Result /Competitor /Composition /Athlete /Description (1,1)			
Athletes extended information.			
Attribute	M/O	Value	Description
GivenName	O	S(25)	Given name in WNPA format (mixed case)
FamilyName	M	S(25)	Family name in WNPA format (mixed case)
Gender	M	<a href="#">CC @PersonGender</a>	Gender of the athlete
Organisation	M	<a href="#">CC @Organisation</a>	Athletes' organisation
BirthDate	O	Date	Birth date (example: YYYY-MM-DD). Must include if the data is available
IFId	O	S(16)	International Federation ID



Class	O	CC @DisplineClass	Code to identify the sport class in the case of events with athletes with a disability (e.g: Paralympic Games).  This attribute is optional because it is not used in events without such athletes.
Horse	O	S(25)	Name of the athlete's horse
GuideID	O	S(20) without leading zeros	ID of the Guide, used for some athletes with a disability (e.g: Paralympic Games).
GuideFamilyName	O	S(25)	Family Name of the athlete's guide (mixed case).  Used for some athletes with a disability (e.g: Paralympic Games).
GuideGivenName	O	S(25)	Given Name of the athlete's guide (mixed case).  Used for some athletes with a disability (e.g: Paralympic Games).

Element Result /Competitor /Composition /Athlete /Description /ExtendedDescription (0,N)			
Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element Result /Competitor /Composition /Athlete /EventUnitEntry (0,N)			
Individual athletes entry information.			
Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element Result /Competitor /Composition /Athlete /ExtendedResults /ExtendedResult (1,N)			
Team member or individual athlete's extended result.			
Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	
Value2	O	See sport specific definition	
ValueType	O	See sport specific definition	ValueType should be used to describe the type of data @Value
IRM	O	See sport specific definition	Send appropriate IRM code if IRM at this ExtendedResult
Rank	O	See sport specific definition	Rank of the competitor for this specific ExtendedResult.
RankEqual	O	S(1)	Send Y where Rank at this specific ExtendedResult is equalled else not sent.
SortOrder	O	See sport specific definition	Similar to rank but considering all competitors (those with IRM or no rank at this ExtendedResult
Diff	O	See sport specific definition	Time/Points etc behind leader at this ExtendedResult
Speed	O	See sport specific definition	Speed at this ExtendedResult



Move	O	See sport specific definition	Change in rank compared to the previous ExtendedResult
Pty	O	See sport specific definition	Penalty information
Discard	O	See sport specific definition	Used when data is to be discarded
Arrive	O	See sport specific definition	Related to arrival information
Unchecked	O	S(1)	Send Y where the result @Value has not been appropriately validated (sport specific) else do not send.

Element Result /Competitor /Composition /Athlete /ExtendedResults /ExtendedResult /Extension (0,N)			
Attribute	M/O	Value	Description
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element Result /Competitor /Composition /Athlete /StatsItems /StatsItem (1,N)			
Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	
Attempt	O	See sport specific definition	
Avg	O	See sport specific definition	Related to average
Percent	O	See sport specific definition	Related to percentage
Rank	O	See sport specific definition	Rank of the competitor for this statistic
RankEqual	O	S(1)	Send Y where Rank for this statistic is equalled else not sent.
SortOrder	O	See sport specific definition	Similar to rank but considering all competitors at this statistic

Element Result /Competitor /Composition /Athlete /StatsItems /StatsItem /ExtendedStat (0,N)			
Extended information for the statistics.			
Attribute	M/O	Value	Description
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element Result /Competitor /Composition /Team (0,N)			
Attribute	M/O	Value	Description
Code	M	S(20) with no leading zeroes	Team's ID (example ATHM4X400m--ESP01, 393553) When the Team is an historical one, then this ID starts with "T".
Order	M	Numeric	Order attribute used to sort the teams if there are multiple teams else 1.
Bib	O	See sport specific definition	Bib number, send if available (team bib)

Element Result /Competitor /Composition /Team /Description (0,1)			
Attribute	M/O	Value	Description
TeamName	M	S(73)	Name of the team
IFId	O	S(16)	International Federation ID



Element Result /Competitor /Composition /Team /Description /ExtendedDescription (0,N)			
Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element Result /Competitor /Composition /Team /EventUnitEntry (0,N)			
Team entry information			
Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element Result /Competitor /Composition /Team /ExtendedResults /ExtendedResult (1,N)			
Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	
Value2	O	See sport specific definition	
ValueType	O	See sport specific definition	ValueType should be used to describe the type of data @Value
IRM	O	See sport specific definition	Send appropriate IRM code if IRM at this ExtendedResult
Rank	O	See sport specific definition	Rank of the competitor for this specific ExtendedResult
RankEqual	O	S(1)	Send Y where Rank at this specific ExtendedResult is equalled else not sent.
SortOrder	O	See sport specific definition	Similar to rank but considering all competitors (those with IRM or no rank at this ExtendedResult)
Diff	O	See sport specific definition	Time/Points etc behind leader at this ExtendedResult
Speed	O	See sport specific definition	Speed at this ExtendedResult
Move	O	See sport specific definition	Change in rank compared to the previous ExtendedResult
Pty	O	See sport specific definition	Penalty information
Discard	O	See sport specific definition	Used when data is to be discarded
Arrive	O	See sport specific definition	Related to arrival information
Unchecked	O	S(1)	Send Y where the result @Value has not been appropriately validated (sport specific) else do not send.

Element Result /Competitor /Composition /Team /ExtendedResults /ExtendedResult /Extension (0,N)			
Attribute	M/O	Value	Description
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	



Element Result /Competitor /Composition /Team /Composition /Athlete (1,N)			
Attribute	M/O	Value	Description
Code	M	S(20) with no leading zeros	Athlete ID of the team member.
Order	O	Numeric	Team member order
StartOrder	O	See sport specific definition	Order of the team members on the start list. This is only used where the order changes from the original start order to a different order during a competition or in results.
StartSortOrder	O	Numeric but see sport specific definition for possible redefined	Order attribute used to sort team members in a team on the startlist. This is only used where the order changes from the original start order to a different order during a competition or in results.
Bib	O	See sport specific definition	Bib number

Element Result /Competitor /Composition /Team /Composition /Athlete /Description (1,1)			
Attribute	M/O	Value	Description
GivenName	O	S(25)	Given name in WNPA format (mixed case)
FamilyName	M	S(25)	Family name in WNPA format (mixed case)
Gender	M	<a href="#">CC @PersonGender</a>	Gender of the athlete
Organisation	M	<a href="#">CC @Organisation</a>	Athlete's organisation
BirthDate	O	Date	Birth date (example YYYY-MM-DD). Must include if this data is available.
IFId	O	S(16)	International Federation ID

Element Result /Competitor /Composition /Team /Composition /Athlete /Description /ExtendedDescription (0,N)			
Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element Result /Competitor /Composition /Team /Composition /Athlete /EventUnitEntry (0,N)			
Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element Result /Competitor /Composition /Team /Composition /Athlete /ExtendedResults /ExtendedResult (1,N)			
Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	
Value2	O	See sport specific definition	
ValueType	O	See sport specific definition	ValueType should be used to describe the type of data @Value
IRM	O	See sport specific definition	Send appropriate IRM code if IRM at this ExtendedResult



Rank	O	See sport specific definition	Rank of the competitor for this ExtendedResult
RankEqual	O	S(1)	Send Y where Rank at this specific ExtendedResult is equalled else not sent.
SortOrder	O	See sport specific definition	Similar to rank but considering all competitors (those with IRM or no rank at this ExtendedResult)
Diff	O	See sport specific definition	Time/Points etc behind at this ExtendedResult
Speed	O	See sport specific definition	Speed at this ExtendedResult
Move	O	See sport specific definition	Change in rank compared to the previous ExtendedResult
Pty	O	See sport specific definition	Penalty information
Discard	O	See sport specific definition	Used when data is to be discarded
Arrive	O	See sport specific definition	Related to arrival information
Unchecked	O	S(1)	Send Y where the result @Value has not been appropriately validated (sport specific) else do not send.

Element Result /Competitor /Composition /Team /Composition /Athlete /ExtendedResults /ExtendedResult /Extension (0,N)			
Attribute	M/O	Value	Description
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

### 2.1.6.6 Message Sort

Message sorting is the same as in the DT\_RESULTS message



## 2.1.7 Current Information

### 2.1.7.1 Description

The Current message is a message containing the current information for a competition which is live. The message is used to send the latest applicable information and in some sports with a running clock, also the clock information.

The following information is the recommended way to use the clock information provided in DT\_CURRENT.

- Show a running clock on the "results" page for a particular unit
- The clock should be first displayed when the ResultStatus for the unit becomes "LIVE" for the first time (i.e. no longer "START\_LIST") and DT\_CURRENT is received.
- The DT\_CURRENT includes the clock information and a status, if the clock is running or stopped.
- The clock should be some sort of display at client side through an application/applet/widget (e.g. javascript countdown/timing clock) which continuously runs in the page, when the status of the clock is indicated as running (Running = Y) then start at the time sent in the same message.
- Whenever you receive a message with the status stopped (Running = N) you need to stop your running clock and show the time sent in the same message. The clock will only be started again, once you receive Running = Y again.
- Every time a new DT\_CURRENT is received then re-synchronise the in-page clock to the time in the message and take action to start or stop the clock as described previously.
- The clock can be continuously displayed while the ResultStatus of the unit in reference is "LIVE" or "INTERMEDIATE" (users may prefer to remove when INTERMEDIATE or SCHEDULED\_BREAK)
- Once a unit is "FINISHED" or the ResultStatus is not one of those above then the clock should be removed from the page as no further updates will be provided.

### 2.1.7.2 Header Values

The following table describes the message header attributes.

Attribute	Value	Comment
CompetitionCode	<a href="#">CC_@Competition</a>	Unique ID for competition
DocumentCode	Full RSC	
DocumentSubcode	To be defined in each ODF Data Dictionary	Extension for the DocumentCode. This is an optional attribute. It is used when the RSC is not enough and it is required several different messages with the same RSC. Each ODF Sport Data Dictionary will have to complete the explanation regarding to this attribute.
DocumentType	DT_CURRENT	Current message
DocumentSubtype	S(20) To be defined in each ODF Data Dictionary	Attribute used to extend DocumentType for some messages. Optional attribute only for special cases.
Version	1..V	Version number associated to the message's content. Ascendant number
FeedFlag	"P"-Production "T"-Test	Test message or production message.
Date	Date	Date when the message is generated, expressed in the local time zone where the message was produced.
Time	Time	Time up to milliseconds when the message is generated, expressed in the local time zone where the message was produced.
LogicalDate	Date	Logical Date of events. This is the same as the physical day except

		when the unit or message transmission extends after midnight. See full explanation in ODF Foundation.
Source	<a href="#">SC_@Source</a>	Code indicating the system which generated the message.

### 2.1.7.3 Trigger and Frequency

Each ODF Sport Data Dictionary defines triggering and frequency for that sport.


### 2.1.7.4 Message Structure


The following table defines the structure of the message.


Level 1	Level 2	Level 3	Level 4	Level 5	Level 6	Level 7	Level 8	Level 9	Level 10	Level 11
<a href="#">Competition (0.1)</a>										
	Gen									
	Sport									
	Codes									
	<a href="#">ExtendedInfos (0.1)</a>									
		<a href="#">ExtendedInfo (1.N)</a>								
			Type							
			Code							
			Pos							
			Value							
			<a href="#">Extension (0.N)</a>							
				Code						
				Pos						
				Value						
	<a href="#">Clock (0.1)</a>									
		Period								
		Time								
		Running								
	<a href="#">Periods (0.1)</a>									
		Home								
		Away								
		<a href="#">Period (1.N)</a>								
			Code							
			HomeScore							
			AwayScore							
			HomePeriodScore							
			AwayPeriodScore							
			Duration							
			<a href="#">ExtendedPeriods (0.1)</a>							
				<a href="#">ExtendedPeriod (1.N)</a>						
				Type						
				Code						
				Pos						
				Value						




<a href="#">Actions (0,N)</a>	
	Home
	Away
<a href="#">Action (1,N)</a>	
	Id
	PId
	Period
	Order
	Action
	ActionAdd
	ActionDesc
	Comment
	When
	Result
	ScoreH
	ScoreA
	LeadH
	LeadA
	SO_H
	SO_A
	Rally
	Win
	Speed
	Loc
	X
	Y
	Z
	Line
	TimeStamp
<a href="#">ExtendedAction (0,N)</a>	
	Code
	Pos
	Value
<a href="#">Competitor (0,N)</a>	
	Code
	Role
	Type
	Order
<a href="#">Composition (0,1)</a>	
<a href="#">Athlete (1,N)</a>	
	Code
	Order
	Bib
	Role

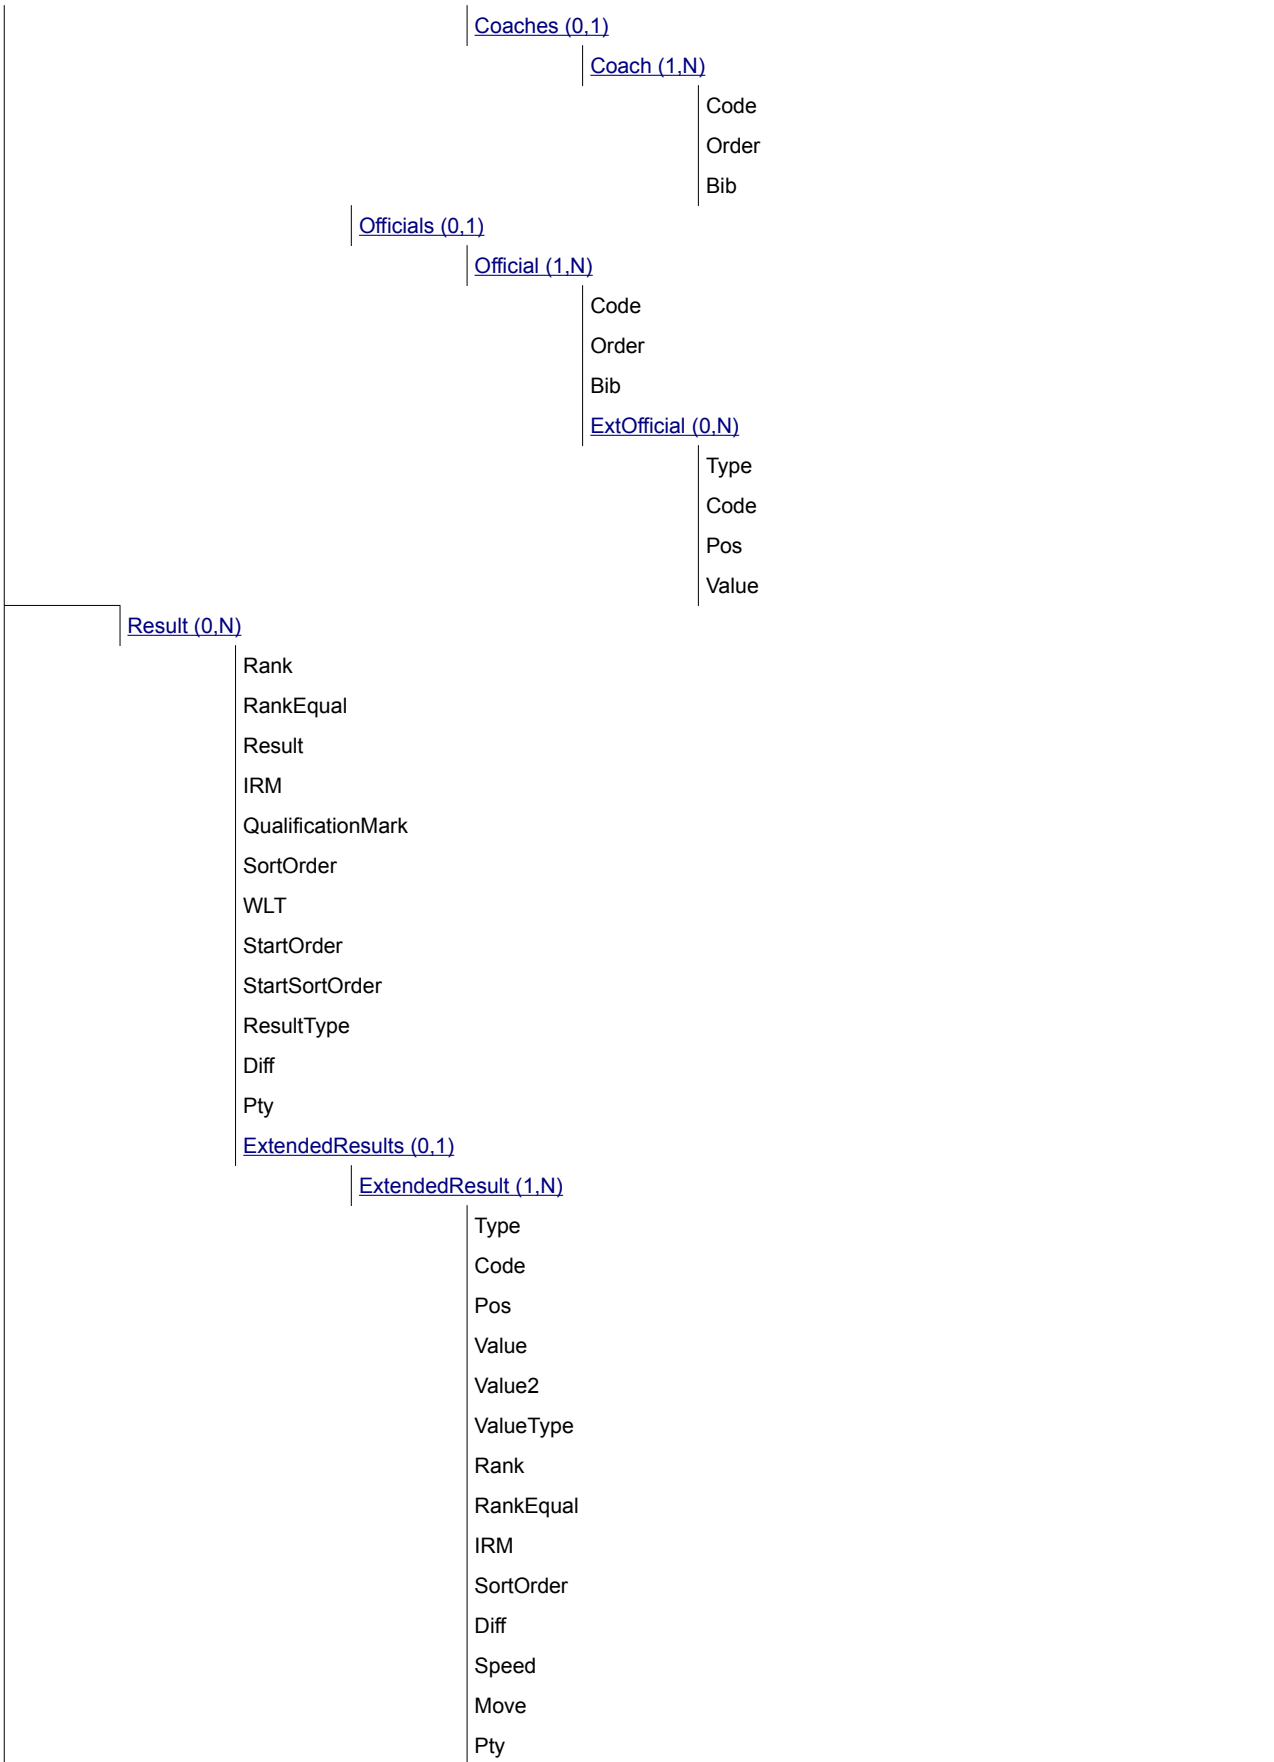

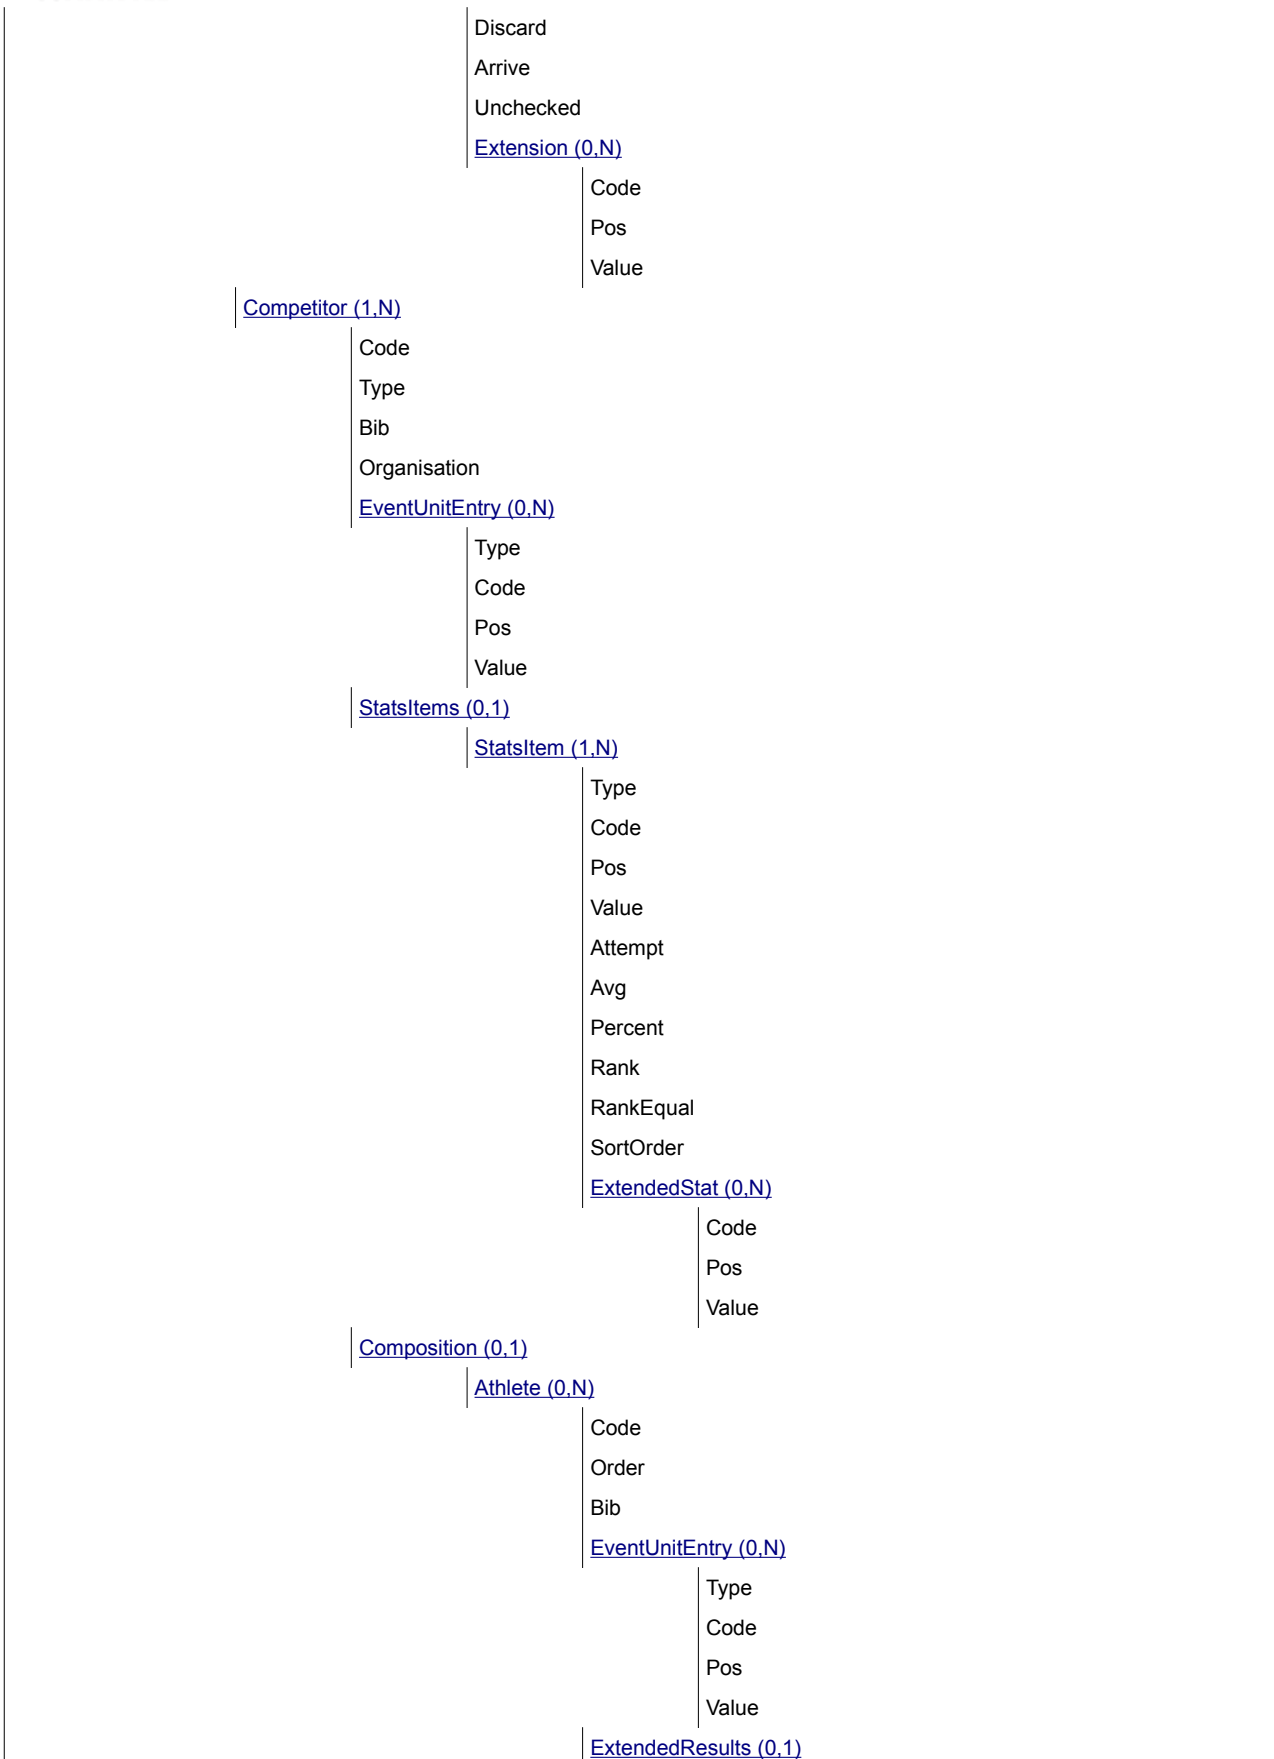

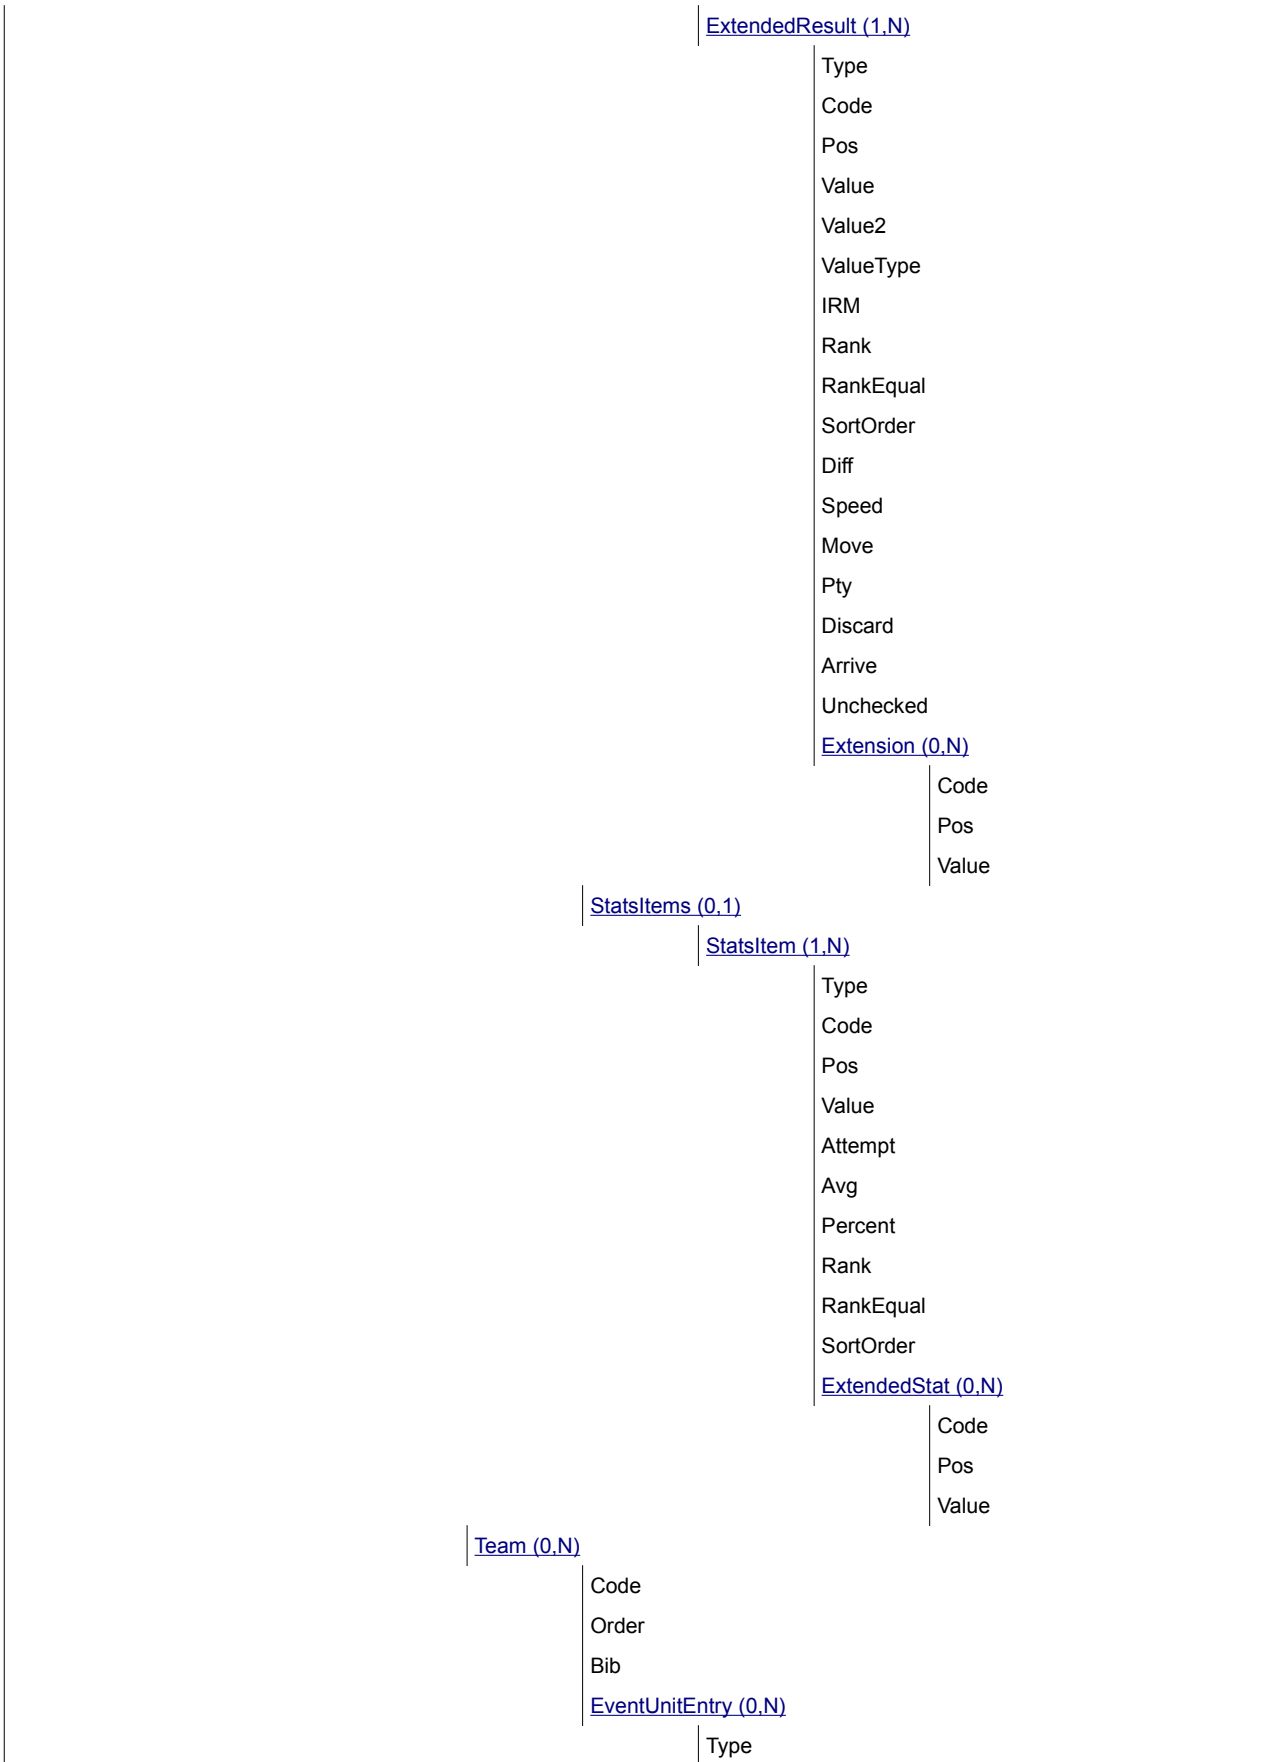

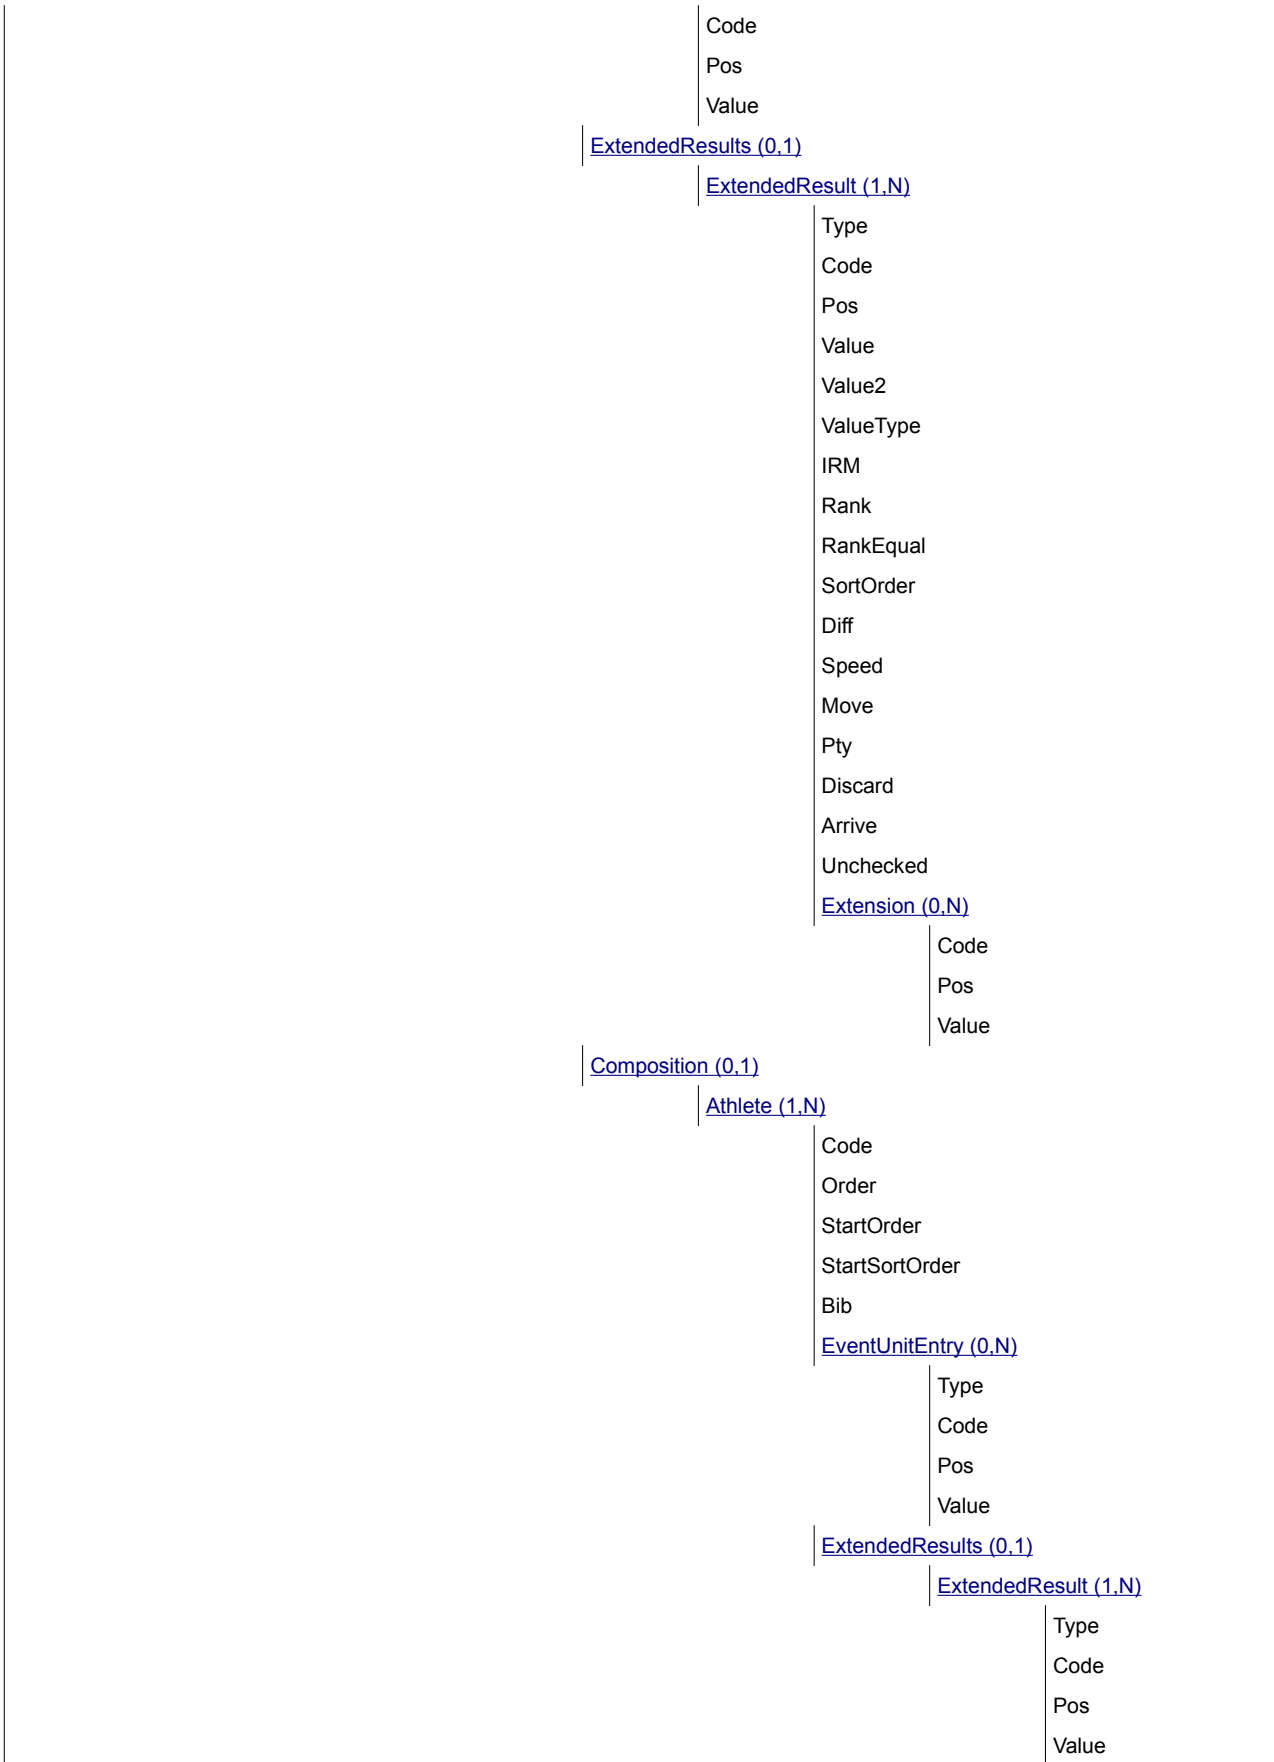

	Value2
	ValueType
	IRM
	Rank
	RankEqual
	SortOrder
	Diff
	Speed
	Move
	Pty
	Discard
	Arrive
	Unchecked
	<a href="#">Extension (0,N)</a>
	Code
	Pos
	Value

### 2.1.7.5 Message Values

Element Competition (0,1)			
Attribute	M/O	Value	Description
Gen	O	S(20)	Version of the General Data Dictionary applicable to the message
Sport	O	S(20)	Version of the Sport Data Dictionary applicable to the message
Codes	O	S(20)	Version of the Codes applicable to the message

Element ExtendedInfos /ExtendedInfo (1,N)			
Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element ExtendedInfos /ExtendedInfo /Extension (0,N)			
Attribute	M/O	Value	Description
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element Clock (0,1)			
Clock Information			
Attribute	M/O	Value	Description
Period	O	See sport specific	Current Period





Time	M	mm:ss	Value of the clock
Running	M	S(1)	Indicates if the clock is currently running. Y to indicate the clock is running, N to indicate the clock is stopped.

Table comment: Attribute to be set Mandatory from Optional or redefined. Refer to the ODF Sport Data Dictionary for each of the disciplines

Element Periods (0,1)			
Attribute	M/O	Value	Description
Home	O	S(20) with no leading zeroes	Home Competitor ID
Away	O	S(20) with no leading zeroes	Away Competitor ID

Element Periods /Period (1,N)			
Period in which the event unit message arrives.			
Attribute	M/O	Value	Description
Code	M	See table comment	Period's code
HomeScore	M	See table comment	Overall score of the home competitor at the end of the period
AwayScore	M	See table comment	Overall score of the away competitor at the end of the period
HomePeriodScore	O	See table comment	Score of the home competitor just for this period
AwayPeriodScore	O	See table comment	Score of the away competitor just for this period
Duration	O	See table comment	Duration of the period

Table comment: Attribute to be set Mandatory from Optional or redefined. Refer to the ODF Sport Data Dictionary for each of the disciplines

Element Periods /Period /ExtendedPeriods /ExtendedPeriod (1,N)			
Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element Actions (0,N)			
Attribute	M/O	Value	Description
Home	O	S(20) with no leading zeroes	Home Competitor ID
Away	O	S(20) with no leading zeroes	Away Competitor ID

Element Actions /Action (1,N)			
Attribute	M/O	Value	Description
Id	M	S(36)	Unique identifier for the action within the message
PId	O	S(36)	If this is a related action then the ID of the original action appears here.
Period	M	See table comment	Period or timing (but not actual time) or event unit segment of the action. (for example P1,P2 for period,... or 0 for prior to



			start or perhaps SWIM if in swimming segment). Use period codes if applicable. Defined sport by sport.
Order	M	Numeric	Unique sequential number for all the incidents and actions, from 1 to n  It is used to sort Action
Action	O	See table comment	Code to describe the action, only use if a code is applicable.
ActionAdd	O	See table comment	Additional information related to the action
ActionDesc	O	S(200)	Action/Incident description where codes (Action) cannot be used (ENG)
Comment	O	S(200)	Additional comment on the action (ENG)
When	O	See table comment	Action's time relative to the period / unit. Defined by discipline though may be actual period time, lap or distance depending on the discipline requirements.
Result	O	Result of the Action	See sport documents, usually a fixed list of results
ScoreH	O	Score of the Home team	Numeric, home team score in the unit after action Depending on sport rules this may or may not include shoot out scores or could be the set score (volleyball)
ScoreA	O	Score of the Away team	Numeric, away team score in the unit after action Depending on sport rules this may or may not include shoot out scores or could be the set score (volleyball)
LeadH	O	Lead of the Home Team	Lead by Home team, may be negative. If used, both LeadH and LeadA are used for maximum flexibility.
LeadA	O	Lead of the Away team	Lead by Away team, may be negative. If used, both LeadH and LeadA are used for maximum flexibility.
SO_H	O	See table comment	Home team score in shoot-out (to break tie)
SO_A	O	See table comment	Away team score in shoot-out (to break tie)
Rally	O	See table comment	Rally number
Win	O	See table comment	Winning indicator of a rally in head to head.
Speed	O	See table comment	Speed as applicable
Loc	O	See table comment	Location of the action
X	O	S(20)	X coordinate of the action location
Y	O	S(20)	Y coordinate of the action location
Z	O	S(20)	Z coordinate of the action location
Line	O	See table comment	Generally for associating line in the same rally
TimeStamp	O	DateTime	Time of the action (for alignment to video)

Table comment: Attribute to be set Mandatory from Optional or redefined. Refer to the ODF Sport Data Dictionary for each of the disciplines

Element Actions /Action /ExtendedAction (0,N)			
Extended Action information			
Attribute	M/O	Value	Description
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element Actions /Action /Competitor (0,N)			
Competitor participating in the Action. Used when the Action is related to a competitor.			
Attribute	M/O	Value	Description



Code	M	S(20) with no leading zeroes	Competitor's ID
Role	O	See table comment	Role of the competitor in the action
Type	M	S(1)	A for athlete, T for team
Order	O	Numeric	Order in which the competitor should appear for the action, if there is more than one competitor. Send 1 if only one.

Table comment: Attribute to be set Mandatory from Optional or redefined. Refer to the ODF Sport Data Dictionary for each of the disciplines

Element Actions /Action /Competitor /Composition /Athlete (1,N)			
Attribute	M/O	Value	Description
Code	M	S(20) with no leading zeroes	Athlete's ID ( individual athlete or team member) related to the action
Order	O	Numeric	Order of the athletes. Used to order the athletes when there are more than one athlete related to the action. Send 1 if only one.
Bib	O	See table comment	Bib number
Role	O	See table comment	Role of the competitor in the action

Table comment: Attribute to be set Mandatory from Optional or redefined. Refer to the ODF Sport Data Dictionary for each of the disciplines

Element Actions /Action /Competitor /Coaches /Coach (1,N)			
Attribute	M/O	Value	Description
Code	O	S(20) with no leading zeroes	Official code. This code is normally expected though there may be rare exceptions.
Order	O	See table comment	Coach order (if more than one coach is needed). Send 1 if only one.
Bib	O	See table comment	Coach bib if applicable

Table comment: Attribute to be set Mandatory from Optional or redefined. Refer to the ODF Sport Data Dictionary for each of the disciplines

Element Actions /Action /Officials /Official (1,N)			
Attribute	M/O	Value	Description
Code	M	S(20) with no leading zeros	Official's code
Order	O	See table comment	Official's order (if the discipline specificity requires it).
Bib	O	See table comment	Official's bib if applicable

Table comment: Attribute to be set Mandatory from Optional or redefined. Refer to the ODF Sport Data Dictionary for each of the disciplines

Element Actions /Action /Officials /Official /ExtOfficial (0,N)			
Attribute	M/O	Value	Description
Type	M	N/A	
Code	M	N/A	
Pos	O	N/A	
Value	O	N/A	

Table comment: Attribute to be set Mandatory from Optional or redefined. Refer to the ODF Sport Data Dictionary for each of the disciplines



Element Result (0,N)			
Attribute	M/O	Value	Description
Rank	O	Text  See table comment	Rank of the competitor
RankEqual	O	S(1)	Identifies if a rank has been equalled. Send Y if applicable else not sent.
Result	O	See table comment	The result of the competitor in the event unit
IRM	O	See table comment	The invalid result mark, in case it is assigned
QualificationMark	O	See table comment	Indicates the qualification of the competitor for the next round of the competition
SortOrder	M	Numeric  See table comment	Used to sort all the results of an event unit  Before the competition this will be the same as the StartSortOrder and is used as the primary sort.  During competition any sort order change from the initial start list order for any competitor will be provided in this attribute regardless the competitor is ranked or not
WLT	O	See table comment	The code whether a competitor won, lost or tied the match / game
StartOrder	O	Numeric  See table comment	Competitor's start order
StartSortOrder	M	Numeric  See table comment	Used to sort all start list competitors in an event unit.
ResultType	O	See table comment	Type of the @Result attribute.
Diff	O	See table comment	Display the time / value behind the leader. All fill when applicable, 0.0 for leader, positive for in front of leader, negative for behind. For example +3.45 means 3.45 sec behind the leader, -1.23 means -1.23 sec in front of (better than) the leader.
Pty	O	See table comment	Penalty information

Table comment: Attribute to be set Mandatory from Optional or redefined. Refer to the ODF Sport Data Dictionary for each of the disciplines

Element Result /ExtendedResults /ExtendedResult (1,N)			
Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	
Value2	O	See sport specific definition	
ValueType	O	See sport specific definition	ValueType should be used to describe the type of data @Value
Rank	O	See sport specific definition	Rank of the competitor for this specific ExtendedResult.
RankEqual	O	S(1)	Send Y where Rank at this specific ExtendedResult is equalled else not sent.
IRM	O	See sport specific definition	Send appropriate IRM code if IRM at this ExtendedResult



SortOrder	O	See sport specific definition	Similar to rank but considering all competitors (those with IRM or no rank at this ExtendedResult)
Diff	O	See sport specific definition	Time/Points etc behind leader at this ExtendedResult
Speed	O	See sport specific definition	Speed at this ExtendedResult
Move	O	See sport specific definition	Change in rank compared to the previous ExtendedResult
Pty	O	See sport specific definition	Penalty information
Discard	O	See sport specific definition	Used when data is to be discarded
Arrive	O	See sport specific definition	Related to arrival information
Unchecked	O	S(1)	Send Y where the result @Value has not been appropriately validated (sport specific) else do not send.

Element Result /ExtendedResults /ExtendedResult /Extension (0,N)			
Attribute	M/O	Value	Description
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element Result /Competitor (1,N)			
Competitor related to the result of one event unit.			
Attribute	M/O	Value	Description
Code	M	S(20) with no leading zeroes or TBD	Competitor's ID or TBD in case that the competitor is unknown
Type	M	S(1)	A for athlete, T for team
Bib	O	See table comment	Bib number
Organisation	M	<a href="#">CC @Organisation</a>	Competitor's organisation

Element Result /Competitor /EventUnitEntry (0,N)			
Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element Result /Competitor /StatsItems /StatsItem (1,N)			
Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	
Attempt	O	See sport specific definition	
Avg	O	See sport specific definition	Related to average
Percent	O	See sport specific definition	Related to percent
Rank	O	See sport specific definition	Rank of the competitor for this statistic
RankEqual	O	S(1)	Send Y where Rank for this statistic is equalled else not sent.
SortOrder	O	See sport specific definition	Similar to rank but considering all competitors for this statistic

Element Result /Competitor /StatsItems /StatsItem /ExtendedStat (0,N)			
Attribute	M/O	Value	Description
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element Result /Competitor /Composition /Athlete (0,N)			
Attribute	M/O	Value	Description
Code	M	S(20) with no leading zeroes	Athletes ID. Can belong to a team member or an individual athlete.
Order	M	Numeric	Order attribute used to sort team members in a team (if Competitor @Type="T") or 1 if Competitor @Type="A".
Bib	O	See table comment	Bib number

Table comment: Attribute to be set Mandatory from Optional or redefined. Refer to the ODF Sport Data Dictionary for each of the disciplines

Element Result /Competitor /Composition /Athlete /EventUnitEntry (0,N)			
Individual athlete's entry information.			
Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element Result /Competitor /Composition /Athlete /ExtendedResults /ExtendedResult (1,N)			
Team member or individual athlete's extended result.			
Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	
Value2	O	See sport specific definition	
ValueType	O	See sport specific definition	ValueType should be used to describe the type of data @Value
IRM	O	See sport specific definition	Send appropriate IRM code if IRM at this ExtendedResult
Rank	O	See sport specific definition	Rank of the competitor for this specific ExtendedResult.
RankEqual	O	S(1)	Send Y where Rank at this specific ExtendedResult is equalled else not sent.
SortOrder	O	See sport specific definition	Similar to rank but considering all competitors (those with IRM or no rank at this ExtendedResult
Diff	O	See sport specific definition	Time/Points etc behind leader at this ExtendedResult
Speed	O	See sport specific definition	Speed at this ExtendedResult
Move	O	See sport specific definition	Change in rank compared to the previous ExtendedResult
Pty	O	See sport specific definition	Penalty information
Discard	O	See sport specific definition	Used when data is to be discarded
Arrive	O	See sport specific definition	Related to arrival information



Unchecked	O	S(1)	Send Y where the result @Value has not been appropriately validated (sport specific) else do not send.
-----------	---	------	--

Element Result /Competitor /Composition /Athlete /ExtendedResults /ExtendedResult /Extension (0,N)			
Attribute	M/O	Value	Description
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element Result /Competitor /Composition /Athlete /StatsItems /StatsItem (1,N)			
Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	
Attempt	O	See sport specific definition	
Avg	O	See sport specific definition	Related to average
Percent	O	See sport specific definition	Related to percent
Rank	O	See sport specific definition	Rank of the competitor for this statistic
RankEqual	O	S(1)	Send Y where Rank for this statistic is equalled else not sent.
SortOrder	O	See sport specific definition	Similar to rank but considering all competitors at this statistic

Element Result /Competitor /Composition /Athlete /StatsItems /StatsItem /ExtendedStat (0,N)			
Extended information for the statistics.			
Attribute	M/O	Value	Description
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element Result /Competitor /Composition /Team (0,N)			
Attribute	M/O	Value	Description
Code	M	S(20) with no leading zeros	Team's ID (example ATHM4X400M--ESP01, 393553) When the Team is a historical one, then this ID starts with "T".
Order	M	Numeric	Order attribute used to sort the teams if there are multiple teams else 1.
Bib	O	See sport specific definition	Team Bib number

Element Result /Competitor /Composition /Team /EventUnitEntry (0,N)			
Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element Result /Competitor /Composition /Team /ExtendedResults /ExtendedResult (1,N)			
--	--	--	--



Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	
Value2	O	See sport specific definition	
ValueType	O	See sport specific definition	ValueType should be used to describe the type of data @Value
IRM	O	See sport specific definition	Send appropriate IRM code if IRM at this specific ExtendedResult
Rank	O	See sport specific definition	Rank of the competitor for this specific ExtendedResult
RankEqual	O	S(1)	Send Y where Rank at this specific ExtendedResult is equalled else not sent.
SortOrder	O	See sport specific definition	Similar to rank but considering all competitors (those with IRM or no rank at this ExtendedResult)
Diff	O	See sport specific definition	Time/Points etc behind leader at the ExtendedResult
Speed	O	See sport specific definition	Speed at this ExtendedResult
Move	O	See sport specific definition	Change in rank compared to the previous ExtendedResult
Pty	O	See sport specific definition	Penalty information
Discard	O	See sport specific definition	Used when data is to be discarded
Arrive	O	See sport specific definition	Related to arrival information
Unchecked	O	S(1)	Send Y where the result @Value has not been appropriately validated else do not send

Table comment: Attribute to be set Mandatory from Optional or redefined. Refer to the ODF Sport Data Dictionary for each of the disciplines

Element Result /Competitor /Composition /Team/ExtendedResults/ExtendedResult/Extension (0,N)			
Attribute	M/O	Value	Description
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Table comment: Attribute to be set Mandatory from Optional or redefined. Refer to the ODF Sport Data Dictionary for each of the disciplines

Element Result /Competitor /Composition /Team /Composition /Athlete (1,N)			
Attribute	M/O	Value	Description
Code	M	S(20) with no leading zeros	Athlete ID of the athlete (team member)
Order	O	Numeric	Team member order
StartOrder	O	Numeric See sport specific definition for possible re-definition	Order of the team members in a team on the start list. This is only used where the order changes from the start order to a different order during a competition or in results.
StartSortOrder	O	Numeric	Order attribute used to sort team members in a team on the start list. This is only used where the order changes from the start order to a different order during a competition or in results.
Bib	O	See sport specific definition	Bib number

Element Result /Competitor /Composition /Team /Composition /Athlete /EventUnitEntry (0,N)			
Attribute	M/O	Value	Description





Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element Result /Competitor /Composition /Team /Composition /Athlete /ExtendedResults /ExtendedResult (1,N)			
Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	
Value2	O	See sport specific definition	
ValueType	O	See sport specific definition	ValueType should be used to describe the type of data @Value
IRM	O	See sport specific definition	Send the appropriate IRM code if IRM at this ExtendedResult
Rank	O	See sport specific definition	Rank of the competitor for this ExtendedResult
RankEqual	O	S(1)	Send Y where Rank at this specific ExtendedResult is equalled else not sent.
SortOrder	O	See sport specific definition	Similar to rank but considering all competitors (those with IRM or no rank at this ExtendedResult)
Diff	O	See sport specific definition	Time/Points etc behind leader at this ExtendedResult
Speed	O	See sport specific definition	Speed at this ExtendedResult
Move	O	See sport specific definition	Change in rank compared to the previous ExtendedResult
Pty	O	See sport specific definition	Penalty information
Discard	O	See sport specific definition	Used when data is to be discarded
Arrive	O	See sport specific definition	Related to arrival information
Unchecked	O	S(1)	Send Y where the result @Value has not been appropriately validated (sport specific) else do not send.

Element Result /Competitor /Composition /Team /Composition /Athlete /ExtendedResults /ExtendedResult /Extension (0,N)			
Attribute	M/O	Value	Description
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

### 2.1.7.6 Message Sort

Sort by Result @SortOrder.

## 2.1.8 Play by Play

### 2.1.8.1 Description

The Play by Play is a message containing official raw data from the results provider for each action or incident.

The message contains a generic definition that can be used to provide results data of different nature as well as all of the actions in a unit.

### 2.1.8.2 Header Values

The following table describes the message header attributes.

Attribute	Value	Comment
CompetitionCode	<a href="#">CC @Competition</a>	Unique ID for competition
DocumentCode	Full RSC	
DocumentSubcode	To be defined in each ODF Data Dictionary	Extension for the DocumentCode. This is an optional attribute. It is used when the RSC is not enough and it is required several different messages with the same RSC. Each ODF Sport Data Dictionary will have to complete the explanation regarding to this attribute.
DocumentType	DT_PLAY_BY_PLAY	Play by Play message
DocumentSubtype	To be defined in each ODF Data Dictionary	Defines type of play by play INCIDENT (generally used for incidents in races) ACTION (generally used for actions in team sports)
Version	1..V	Version number associated to the message's content. Ascendant number
ResultStatus	<a href="#">SC @ResultStatus</a>	Status of the message. Possible values are: START_LIST (only used if there are actions before the start) LIVE (used during the competition when nothing else applies) INTERMEDIATE UNOFFICIAL OFFICIAL (when results official)
FeedFlag	"P"-Production "T"-Test	Test message or production message.
Date	Date	Date when the message is generated, expressed in the local time zone where the message was produced.
Time	Time	Time up to milliseconds when the message is generated, expressed in the local time zone where the message was produced.
LogicalDate	Date	Logical Date of events. This is the same as the physical day except when the unit or message transmission extends after midnight. See full explanation in ODF Foundation.
Source	<a href="#">SC @Source</a>	Code indicating the system which generated the message.

### 2.1.8.3 Trigger and Frequency

Each ODF Sport Data Dictionary defines triggering and frequency for that sport.


### 2.1.8.4 Message Structure


The following table defines the structure of the message.

Level 1	Level 2	Level 3	Level 4	Level 5	Level 6	Level 7	Level 8	Level 9
<a href="#">Competition (0.1)</a>								
	Gen							



	Sport		
	Codes		
	<a href="#">ExtendedInfos (0,1)</a>		
		<a href="#">ExtendedInfo (0,N)</a>	
			Type
			Code
			Pos
			Value
			<a href="#">Extension (0,N)</a>
			Code
			Pos
			Value
		<a href="#">SportDescription (0,1)</a>	
			DisciplineName
			EventName
			SubEventName
			Gender
			UnitNum
		<a href="#">VenueDescription (0,1)</a>	
			Venue
			VenueName
			Location
			LocationName
	<a href="#">Actions (0,1)</a>		
		Home	
		Away	
		<a href="#">Action (1,N)</a>	
			Id
			PId
			Period
			Order
			Action
			ActionAdd
			ActionDesc
			Comment
			When
			Result
			ScoreH
			ScoreA
			LeadH
			LeadA
			SO_H
			SO_A
			Rally

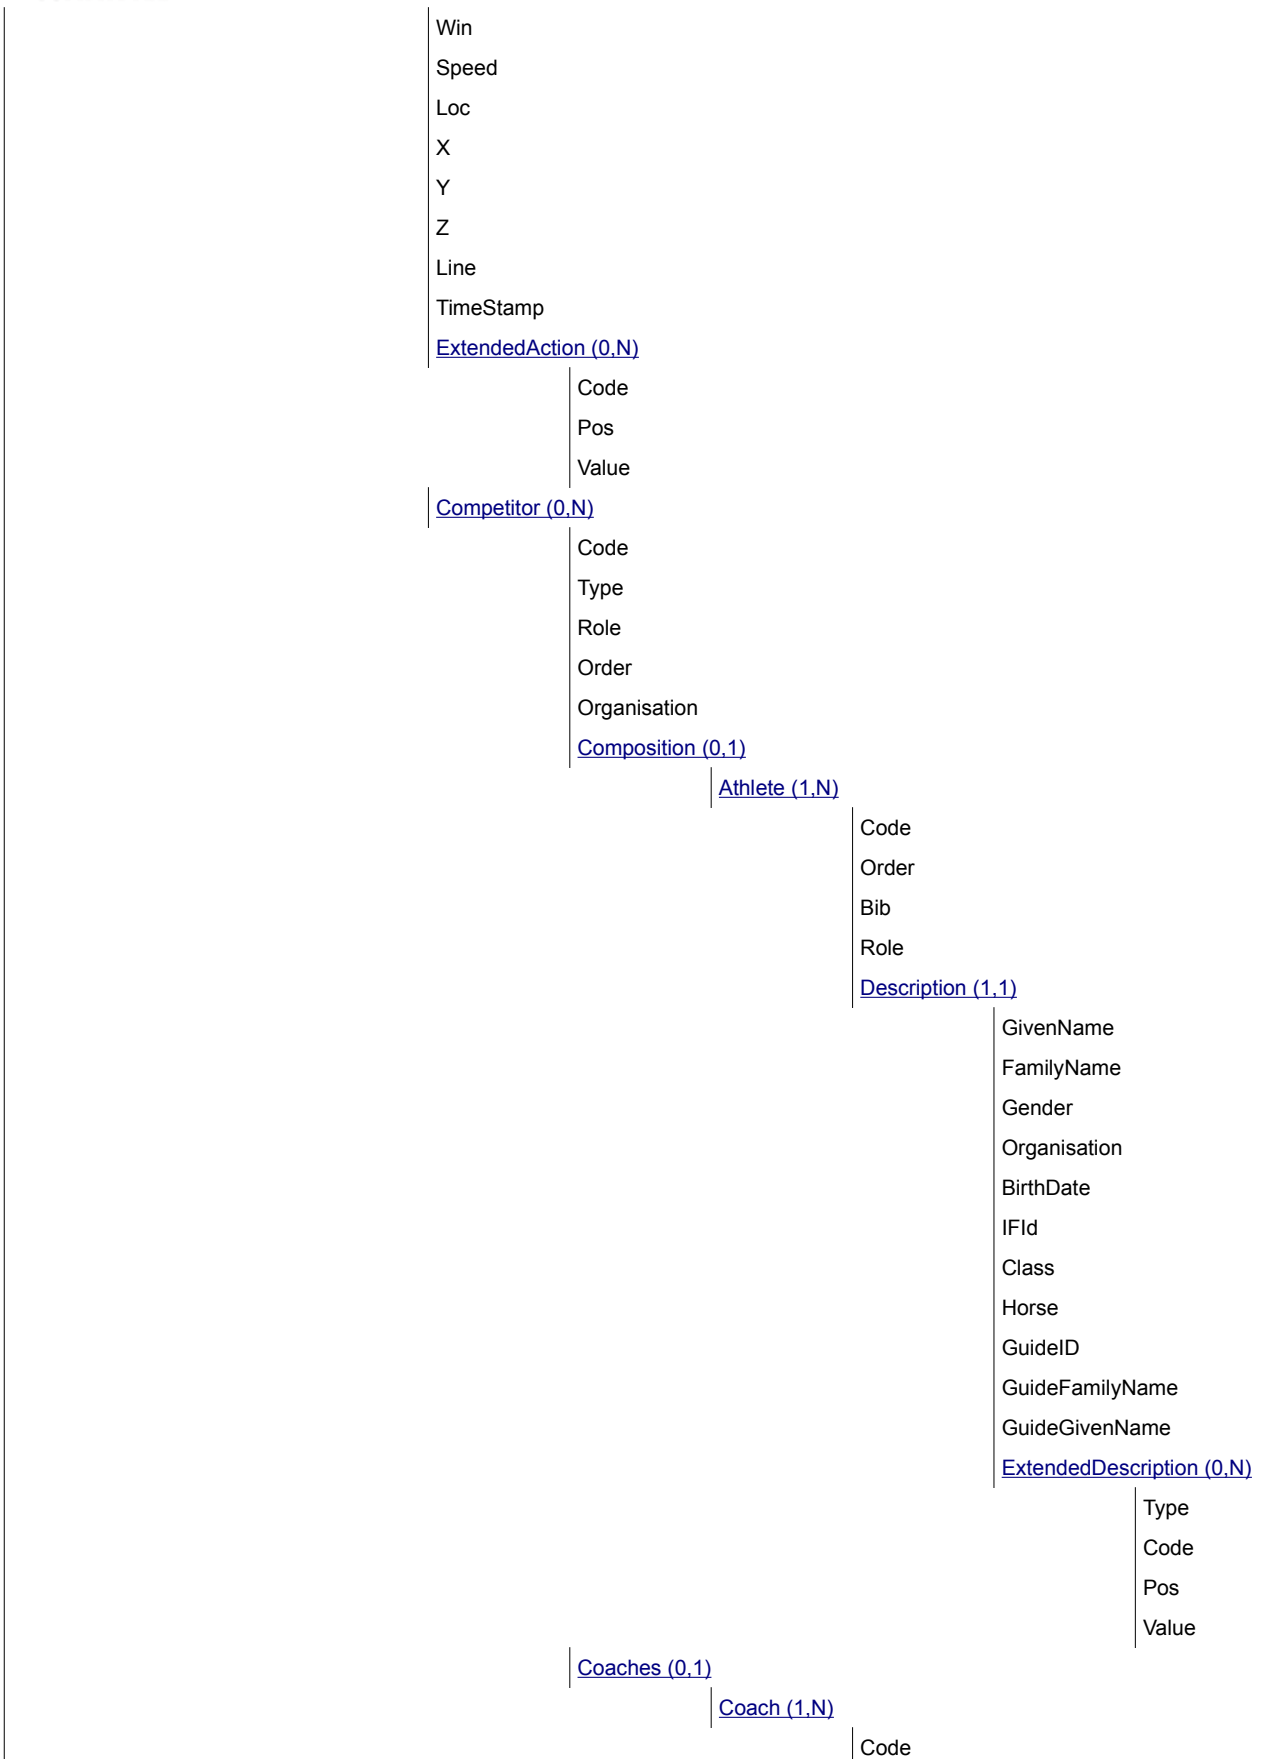

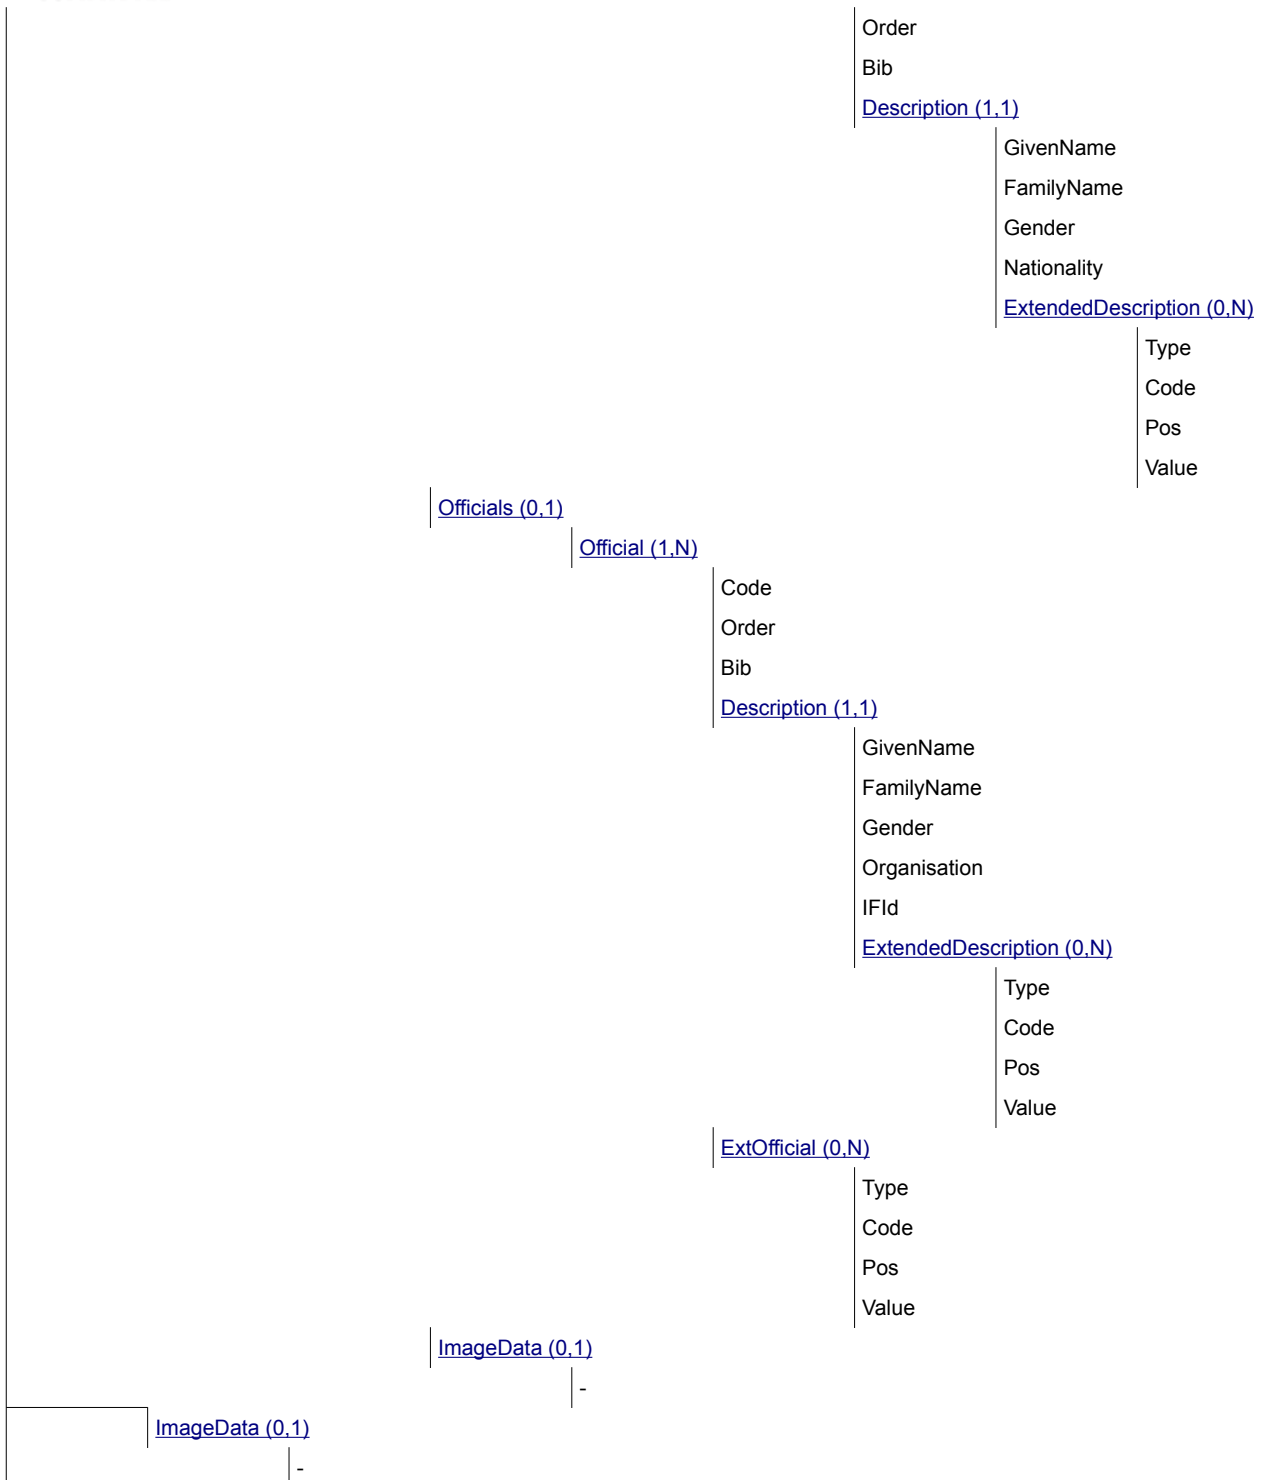

### 2.1.8.5 Message Values

Element Competition (0,1)			
Attribute	M/O	Value	Description
Gen	O	S(20)	Version of the General Data Dictionary applicable to the message



Sport	O	S(20)	Version of the Sport Data Dictionary applicable to the message
Codes	O	S(20)	Version of the Codes applicable to the message

Element ExtendedInfos /ExtendedInfo (0,N)			
Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element ExtendedInfos /ExtendedInfo /Extension (0,N)			
Attribute	M/O	Value	Description
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element ExtendedInfos /SportDescription (0,1)			
Sport Descriptions in Text.			
Attribute	M/O	Value	Description
DisciplineName	M	S(40)	Discipline name (not code) from Common Codes
EventName	M	S(40)	Event name (not code) from Common Codes
SubEventName	O	S(40)	EventUnit short name (not code) from Common Codes
Gender	M	CC @SportGender	Gender code for the event unit
UnitNum	O	S(15)	Match / Game / Bout / Race Number or similar if applicable

Element ExtendedInfos /VenueDescription (0,1)			
Venue Names in Text.			
Attribute	M/O	Value	Description
Venue	M	<a href="#">CC @VenueCode</a>	Venue Code
VenueName	M	S(25)	Venue Description (not code) from Common Codes
Location	M	<a href="#">CC @Location</a>	Location code
LocationName	M	S(30)	Location Description (not code) from Common Codes

Element Actions (0,1)			
Attribute	M/O	Value	Description
Home	O	S(20) with no leading zeroes	Home Competitor ID
Away	O	S(20) with no leading zeroes	Away Competitor ID

Element Actions /Action (1,N)			
Attribute	M/O	Value	Description
Id	M	S(36)	Unique identifier for the action within the message
PId	O	S(36)	If this is a related action then the ID of the original action appears here.



Period	M	See table comment	Period or timing (but not actual time) or event unit segment of the action. (for example P1,P2 for period,... or 0 for prior to start or perhaps SWIM if in swimming segment). Use period codes if applicable. Defined sport by sport.
Order	M	Numeric	Unique sequential number for all the incidents and actions, from 1 to n  It is used to sort Action
Action	O	See table comment	Code to describe the action, only use if a code is applicable.
ActionAdd	O	See table comment	Additional information related to the action
ActionDesc	O	S(200)	Action/Incident description where codes (Action) cannot be used (ENG)
Comment	O	S(200)	Additional comment on the action (ENG)
When	O	See table comment	Action's time relative to the period / unit. Defined by discipline though may be actual period time, lap or distance depending on the discipline requirements.
Result	O	Result of the Action	See sport documents, usually a fixed list of results
ScoreH	O	Score of the Home team	Numeric, home team score in the unit after action.  Depending on sport rules this may or may not include shoot out scores or could be the set score (volleyball)
ScoreA	O	Score of the Away team	Numeric, away team score in the unit after action.  Depending on sport rules this may or may not include shoot out scores or could be the set score (volleyball)
LeadH	O	Lead of the Home Team	Lead by Home team, may be negative. If used, both LeadH and LeadA are used for maximum flexibility.
LeadA	O	Lead of the Away team	Lead by Away team, may be negative. If used, both LeadH and LeadA are used for maximum flexibility.
SO_H	O	See table comment	Home team score in shoot-out (to break tie)
SO_A	O	See table comment	Away team score in shoot-out (to break tie)
Rally	O	See table comment	Rally number
Win	O	See table comment	Winning indicator of a rally in head to head
Speed	O	See table comment	Speed as applicable
Loc	O	See table comment	Location of the action
X	O	S(20)	X coordinate of the action location
Y	O	S(20)	Y coordinate of the action location
Z	O	S(20)	Z coordinate of the action location
Line	O	See table comment	Generally for associating line in the same rally
TimeStamp	O	DateTime	Time of the action (for alignment to video)

Table comment: Attribute to be set Mandatory from Optional or redefined. Refer to the ODF Sport Data Dictionary for each of the disciplines

**Element Actions /Action /ExtendedAction (0,N)**

**Extended Action information.**

Attribute	M/O	Value	Description
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

**Element Actions /Action /Competitor (0,N)**



Competitor participating in the Action. Used when the Action is related to a competitor.			
Attribute	M/O	Value	Description
Code	M	S(20) with no leading zeroes	Competitor's ID
Type	M	S(1)	A for athlete, T for team
Role	O	See table comment	Role of the competitor in the action
Order	O	Numeric	Order in which the competitor should appear for the action, if there is more than one competitor. Send 1 if only one.
Organisation	M	<a href="#">CC @Organisation</a>	Competitors' organisation

Table comment: Attribute to be set Mandatory from Optional or redefined. Refer to the ODF Sport Data Dictionary for each of the disciplines

Element Actions /Action /Competitor /Composition /Athlete (1,N)			
Attribute	M/O	Value	Description
Code	M	S(20) with no leading zeroes	Athlete's ID ( individual athlete or team member) related to the action
Order	O	Numeric	Order of the athletes. Used to order the athletes when there are more than one athlete related to the action. Send 1 if only one.
Bib	O	See table comment	Bib number
Role	O	See table comment	Role of the competitor in the action

Table comment: Attribute to be set Mandatory from Optional or redefined. Refer to the ODF Sport Data Dictionary for each of the disciplines

Element Actions /Action /Competitor /Composition /Athlete /Description (1,1)			
Athletes extended information			
Attribute	M/O	Value	Description
GivenName	O	S(25)	Given name in WNPA format (mixed case)
FamilyName	M	S(25)	Family name in WNPA format (mixed case)
Gender	M	<a href="#">CC @PersonGender</a>	Gender of the athlete
Organisation	M	<a href="#">CC @Organisation</a>	Athletes' organisation
BirthDate	O	Date	Birth date (example: YYYY-MM-DD). Must include if the data is available
IFId	O	S(16)	International Federation ID
Class	O	<a href="#">CC @DisplineClass</a>	Code to identify the sport class in the case of events with athletes with a disability (e.g: Paralympic Games).  This attribute is optional because it is not used in events without such athletes.
Horse	O	S(25)	Name of the athlete's horse
GuideID	O	S(20) without leading zeros	ID of the Guide, used for some athletes with a disability (e.g: Paralympic Games).
GuideFamilyName	O	S(25)	Family Name of the athlete's guide (mixed case).  Used for some athletes with a disability (e.g: Paralympic Games).
GuideGivenName	O	S(25)	Given Name of the athlete's guide (mixed case).  Used for some athletes with a disability (e.g: Paralympic Games).





Element Actions /Action /Competitor /Composition /Athlete /Description /ExtendedDescription (0,N)			
Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element Actions /Action /Competitor /Coaches /Coach (1,N)			
Attribute	M/O	Value	Description
Code	O	S(20) with no leading zeroes	Official code. This code is normally expected though there may be rare exceptions.
Order	O	See table comment	Coach order (if more than one coach is needed). Send 1 if only one.
Bib	O	See table comment	Coach bib if applicable

Table comment: Attribute to be set Mandatory from Optional or redefined. Refer to the ODF Sport Data Dictionary for each of the disciplines

Element Actions /Action /Competitor /Coaches /Coach /Description (1,1)			
Coach extended information.			
Attribute	M/O	Value	Description
GivenName	O	S(25)	Given name in WNPA format (mixed case)
FamilyName	M	S(25)	Family name in WNPA format (mixed case)
Gender	M	<a href="#">CC @PersonGender</a>	Gender of the official
Nationality	M	<a href="#">CC @Country</a>	Coach's nationality

Element Actions /Action /Competitor /Coaches /Coach /Description /ExtendedDescription (0,N)			
Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element Actions /Action /Officials /Official (1,N)			
Attribute	M/O	Value	Description
Code	M	S(20) with no leading zeroes	Official's code
Order	O	See table comment	Official's order (if the discipline specificity required it).
Bib	O	See table comment	Official's bib if applicable

Table comment: Attribute to be set Mandatory from Optional or redefined. Refer to the ODF Sport Data Dictionary for each of the disciplines

Element Actions /Action /Officials /Official /Description (1,1)			
Officials extended information.			
Attribute	M/O	Value	Description



GivenName	O	S(25)	Given name in WNPA format (mixed case)
FamilyName	M	S(25)	Family name in WNPA format (mixed case)
Gender	M	<a href="#">CC @PersonGender</a>	Gender of the official
Organisation	M	<a href="#">CC @Organisation</a>	Officials' organisation
IFId	O	S(16)	International Federation ID

Element Actions /Action /Officials /Official /Description /ExtendedDescription (0,N)			
Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element Actions /Action /Officials /Official /ExtOfficial (0,N)			
Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element Actions /Action /ImageData (0,1)			
Attribute	M/O	Value	Description
-	M	Text	The ImageData element contains a body consisting of one Base64-encoded PNG file.

Element ImageData (0,1)			
Attribute	M/O	Value	Description
-	M	Text	The ImageData element contains a body consisting of one Base64-encoded PNG file.

### 2.1.8.6 Message Sort

Actions /Action @Order.

## 2.1.9 Phase Results

### 2.1.9.1 Description

The Phase Results is a message containing the results for the competitors in a particular phase.

The phase message is used to compare competitors from different units within a phase where the competitors usually participate once in the phase.

The mandatory attributes and mandatory elements defined in this message will have to be used by all the sports, although each ODF Sport Data Dictionary will explain further details of the optional attributes or optional elements of the message.

The message is used to send an intermediate summary of results (including rank) part way through a phase. In this case, the DocumentSubtype is used to specify the last event unit that contributed results to the message.

### 2.1.9.2 Header Values

The following table describes the message header attributes.

Attribute	Value	Comment
CompetitionCode	<a href="#">CC @Competition</a>	Unique ID for competition
DocumentCode	Full RSC	Each ODF Sport Data Dictionary will have to complete the explanation regarding to this attribute
DocumentSubcode	S(34) To be defined in each ODF Data Dictionary	Attribute used to extend DocumentCode.
DocumentType	DT_PHASE_RESULT	Phase Results message
DocumentSubtype	S(20) To be defined in each ODF Data Dictionary	Attribute used to extend DocumentType.
Version	1..V	Version number associated to the message's content. Ascendant number
ResultStatus	<a href="#">SC @ResultStatus</a>	It indicates whether the result is official or unofficial. INTERMEDIATE (used after each unit in the phase) LIVE UNOFFICIAL OFFICIAL PROTESTED
FeedFlag	"P"-Production "T"-Test	Test message or production message.
Date	Date	Date when the message is generated, expressed in the local time zone where the message was produced.
Time	Time	Time up to milliseconds when the message is generated, expressed in the local time zone where the message was produced.
LogicalDate	Date	Logical Date of events. This is the same as the physical day except when the unit or message transmission extends after midnight. See full explanation in ODF Foundation.
Source	<a href="#">SC @Source</a>	Code indicating the system which generated the message.

### 2.1.9.3 Trigger and Frequency

The general rule is that this message is sent after every unit in a phase as intermediate and then as soon as the last event unit for the corresponding phase finishes and again when the message becomes unofficial just at the end of the event unit, and afterwards when the message becomes official (when the last event unit of the phase becomes official). The official/unofficial status can be seen in ODF header (ResultStatus attribute). Depending on the nature of the units the message may also be sent as LIVE.


Trigger also after any change.


If there is any kind of sport specific rule, this can be overwritten in the corresponding ODF Sport Data Dictionaries.


### 2.1.9.4 Message Structure

The following table defines the structure of the message.

Level 1	Level 2	Level 3	Level 4	Level 5	Level 6	Level 7	Level 8	Level 9	Level 10	Level 11
<a href="#">Competition (0.1)</a>										
	Gen									
	Sport									
	Codes									
	<a href="#">ExtendedInfos (0.1)</a>									
		<a href="#">ExtendedInfo (0,N)</a>								
			Type							
			Code							
			Pos							
			Value							
			<a href="#">Extension (0,N)</a>							
				Code						
				Pos						
				Value						
		<a href="#">Progress (0.1)</a>								
			LastUnit							
			UnitsTotal							
			UnitsComplete							
			<a href="#">Extension (0,N)</a>							
				Code						
				Pos						
				Value						
		<a href="#">SportDescription (0.1)</a>								
			DisciplineName							
			EventName							
			SubEventName							
			Gender							
		<a href="#">VenueDescription (0.1)</a>								
			Venue							

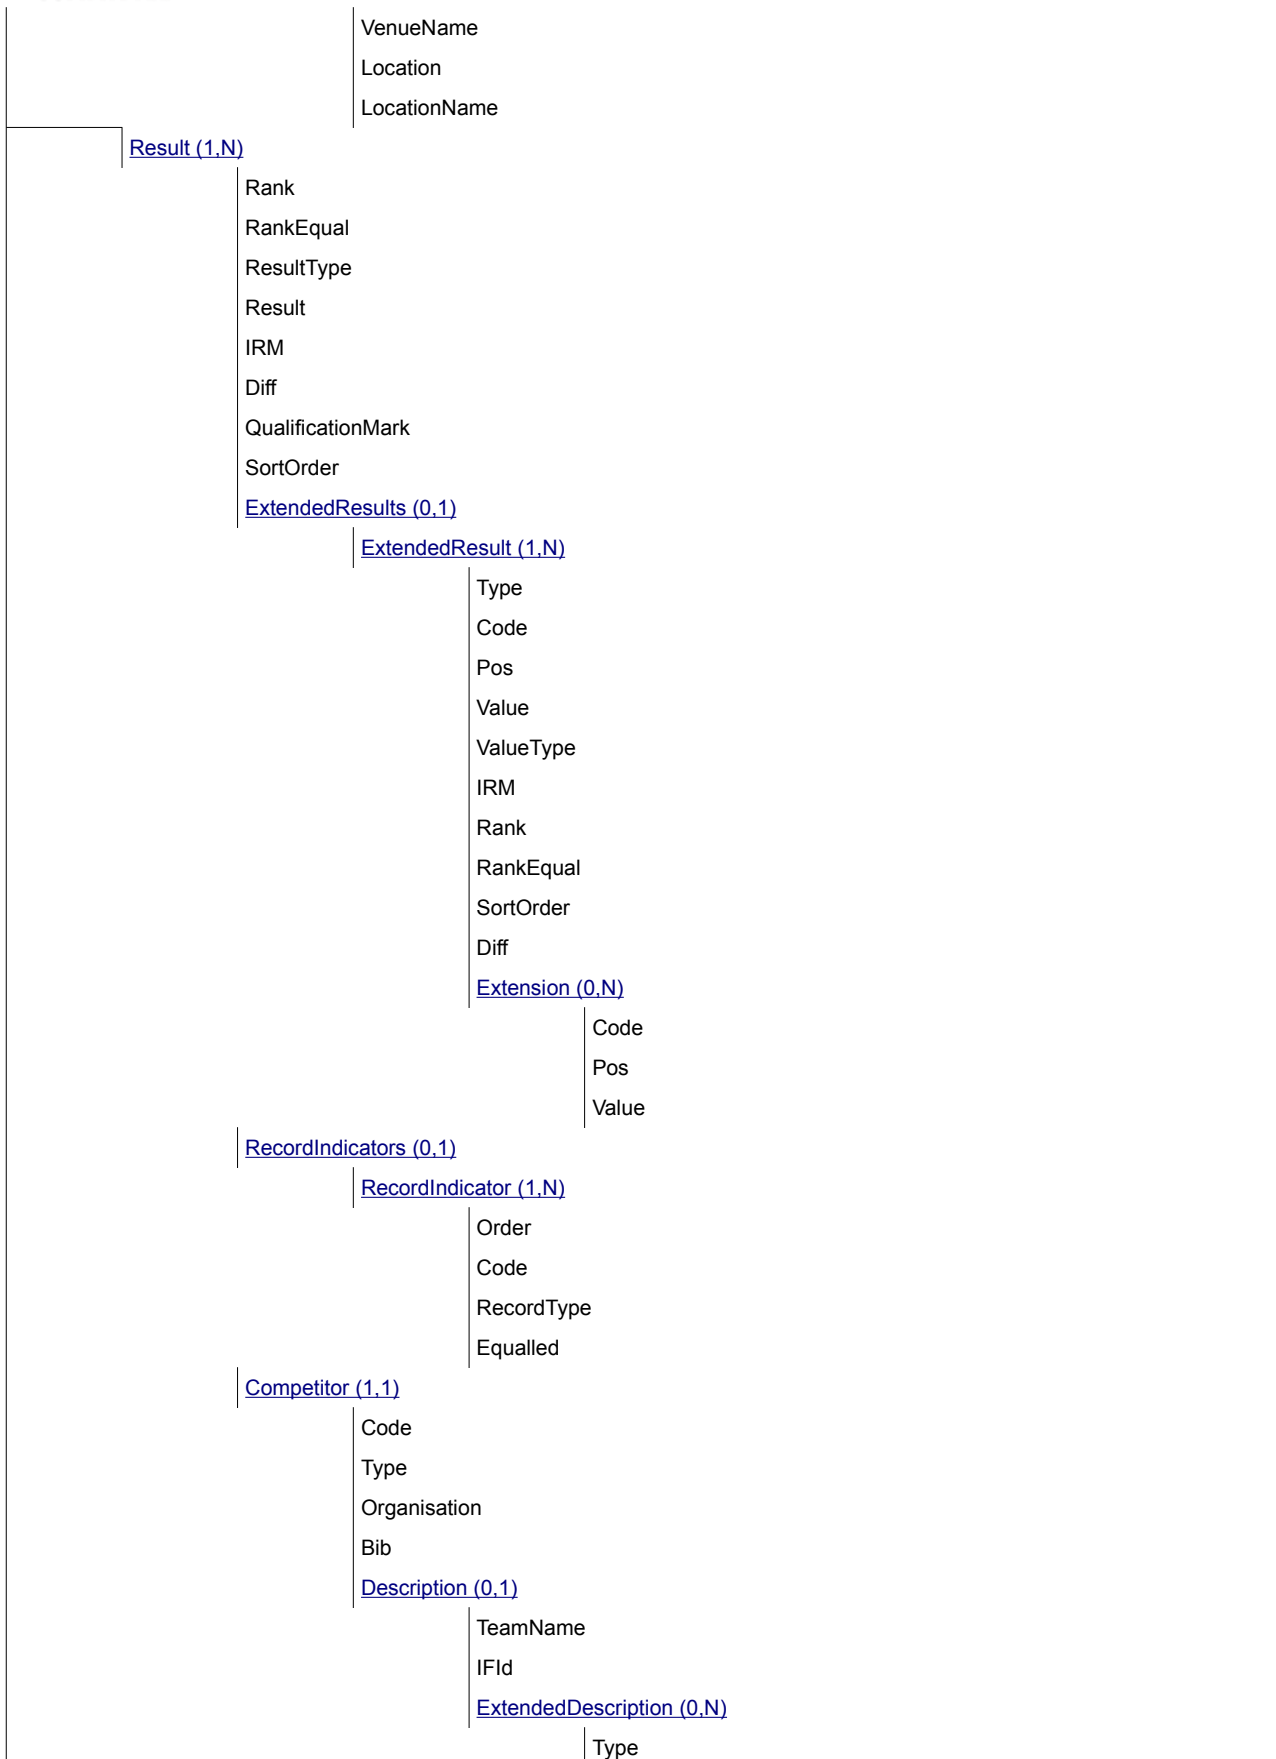

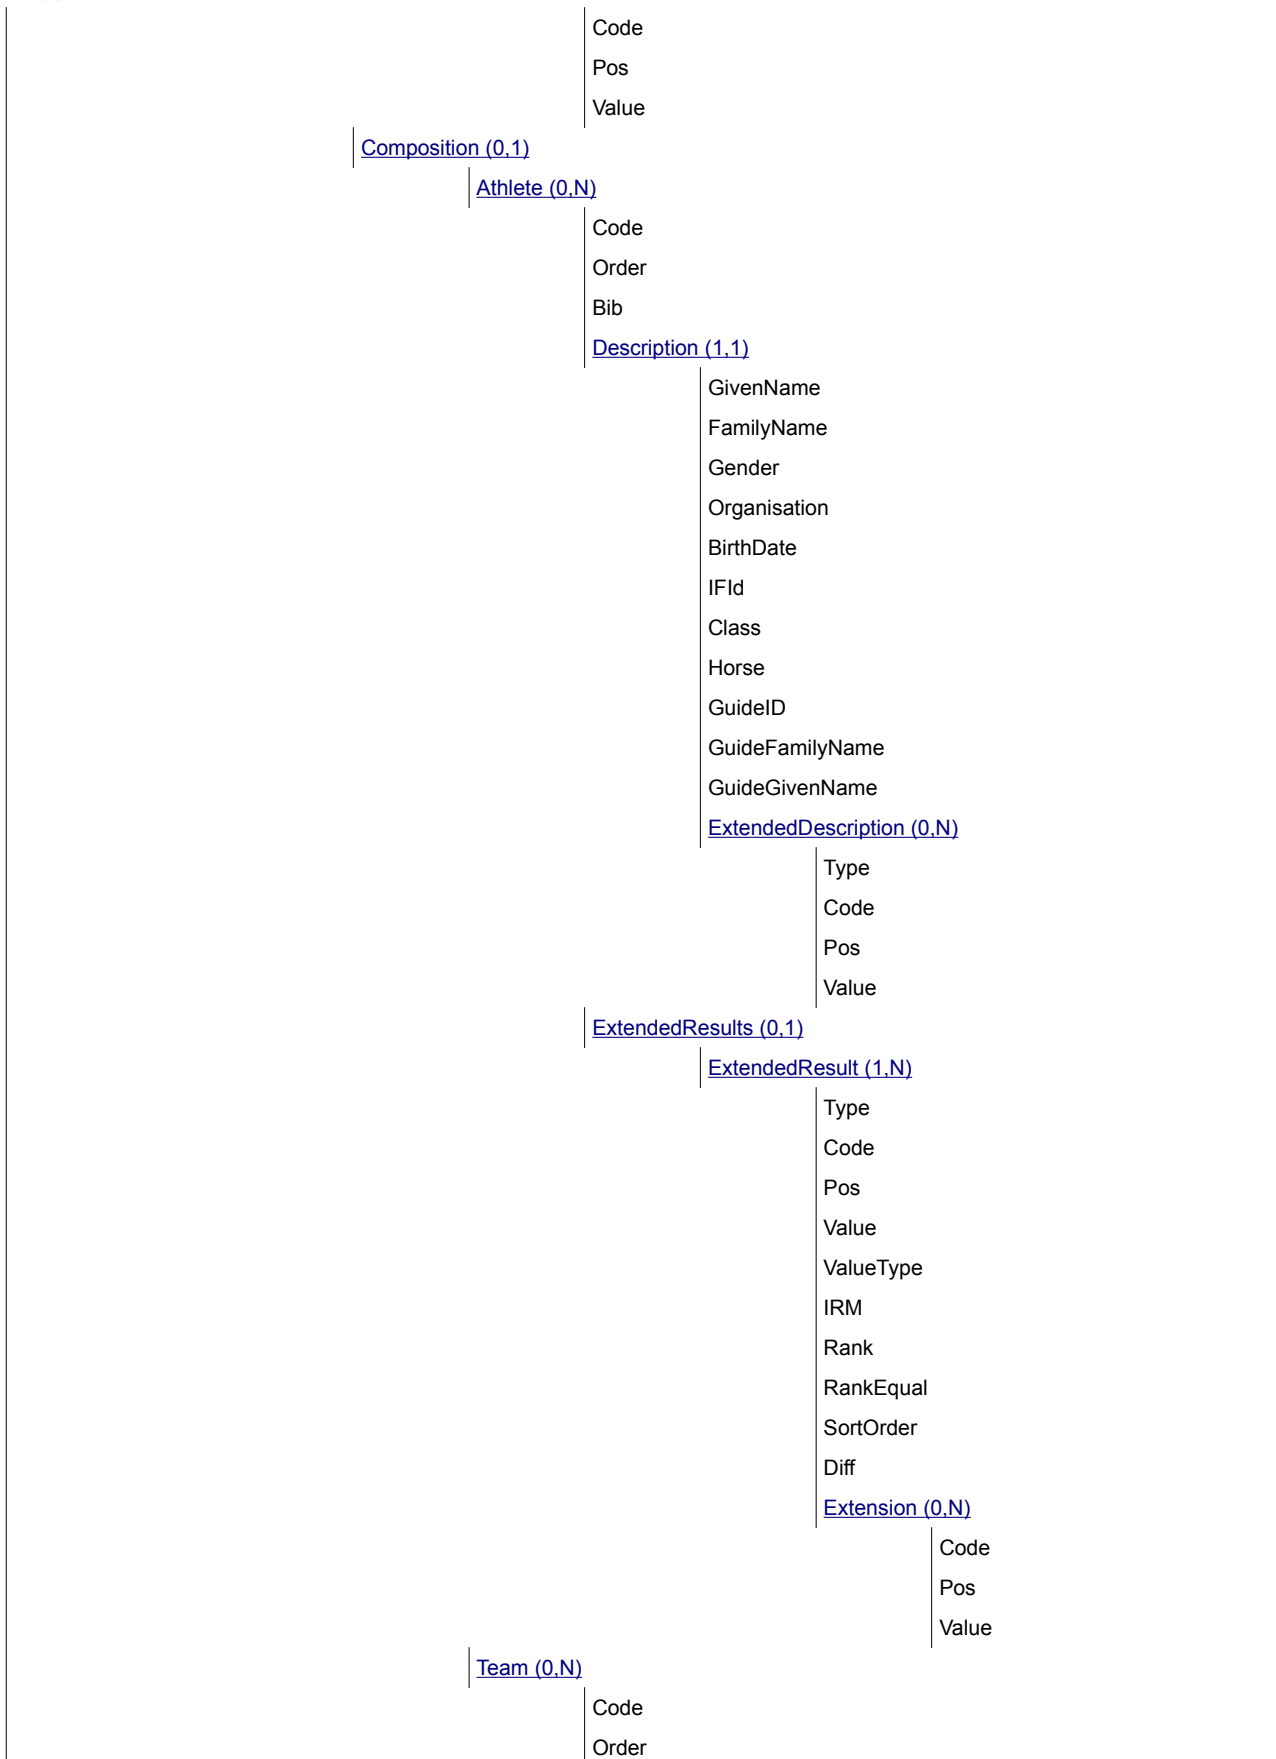

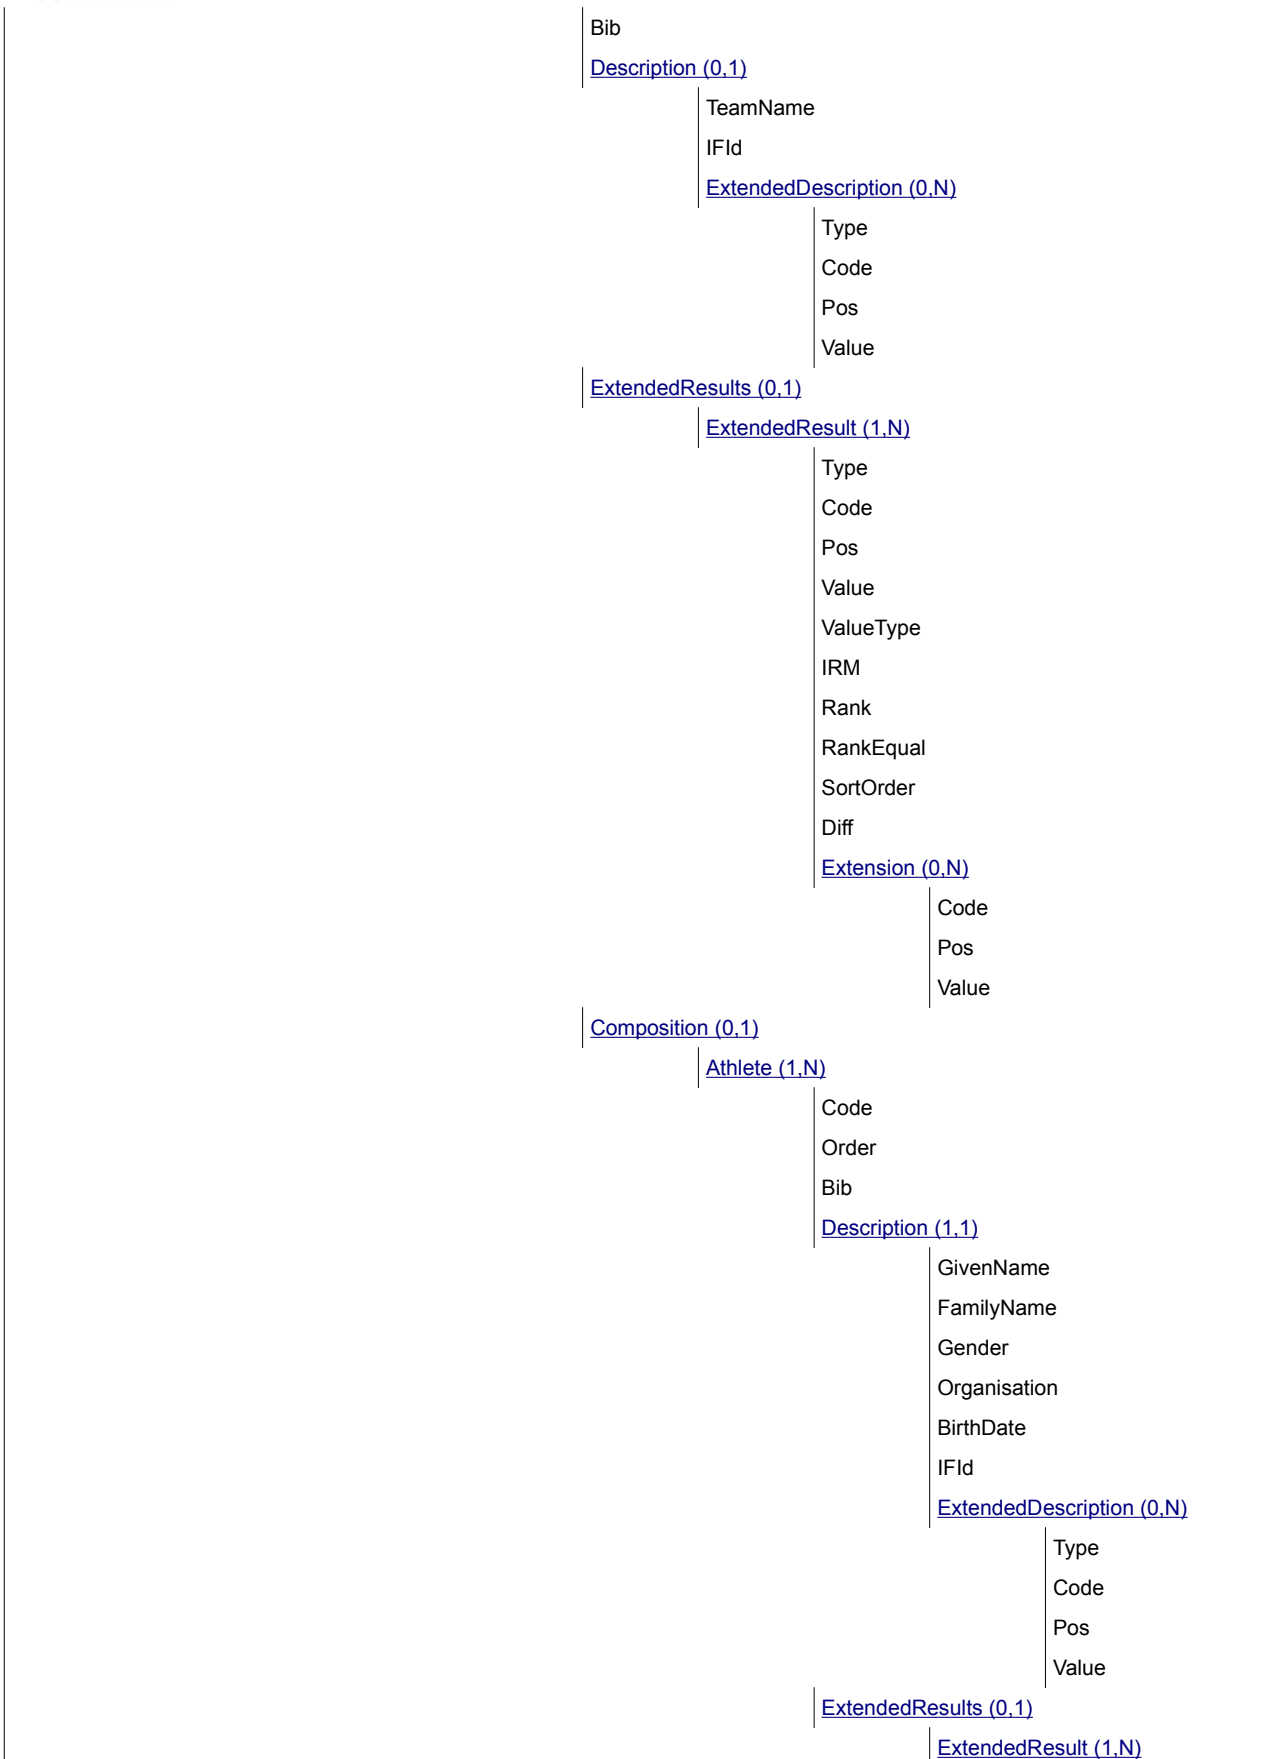

	Type
	Code
	Pos
	Value
	ValueType
	IRM
	Rank
	RankEqual
	SortOrder
	Diff
	<a href="#">Extension (0,N)</a>
	Code
	Pos
	Value

### 2.1.9.5 Message Values

Element Competition (0,1)			
Attribute	M/O	Value	Description
Gen	O	S(20)	Version of the General Data Dictionary applicable to the message
Sport	O	S(20)	Version of the Sport Data Dictionary applicable to the message
Codes	O	S(20)	Version of the Codes applicable to the message

Element ExtendedInfos /ExtendedInfo (0,N)			
Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element ExtendedInfos /ExtendedInfo /Extension (0,N)			
Attribute	M/O	Value	Description
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element ExtendedInfos /Progress (0,1)			
Attribute	M/O	Value	Description
LastUnit	O	<a href="#">CC @Unit</a>	Full RSC of the last unit completed (or in progress if applicable) related to the message's content
UnitsTotal	O	Numeric ##0	Total units expected related data impacting this message.
UnitsComplete	O	Numeric ##0	Total units completed which have related data impacting this message.





Element ExtendedInfos /Progress /Extension (0,N)			
Attribute	M/O	Value	Description
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Table comment: Attribute to be set Mandatory from Optional or redefined. Refer to the ODF Sport Data Dictionary for each of the disciplines

Element ExtendedInfos /SportDescription (0,1)			
Sport Descriptions in Text.			
Attribute	M/O	Value	Description
DisciplineName	M	S(40)	Discipline name (not code) from Common Codes
EventName	M	S(40)	Event name (not code) from Common Codes
SubEventName	O	S(40)	Phase level short name (not code) from Common Codes
Gender	M	CC @SportGender	Gender code for the event unit

Element ExtendedInfos /VenueDescription (0,1)			
Venue Names in Text.			
Attribute	M/O	Value	Description
Venue	M	<a href="#">CC @VenueCode</a>	Venue Code
VenueName	M	S(25)	Venue Description (not code) from Common Codes
Location	O	<a href="#">CC @Location</a>	Location code
LocationName	O	S(30)	Location Description (not code) from Common Codes

Element Result (1,N)			
For any Phase Results message, there should be at least one competitor being awarded a result for the phase.			
Attribute	M/O	Value	Description
Rank	O	Text See table comment	Rank of the competitor in the phase.
RankEqual	O	S(1)	Identifies if a rank has been equalled. Send Y if applicable else not sent.
ResultType	O	See table comment	Type of the @Result attribute
Result	O	See table comment	The result of the competitor in the phase
IRM	O	See table comment	The invalid result mark, in case it is assigned
Diff	O	See table comment	Display the time / value behind the leader. All fill when applicable, 0.0 for leader, negative for in front of leader, positive for behind. For example +3.45 means 3.45 sec behind the leader, -1.23 means -1.23 sec in front of (better than) the leader.
QualificationMark	O	See table comment	The code which gives an indication on the qualification of the competitor for the next round of the competition
SortOrder	M	Numeric See table comment	Used to sort all results in a phase, based on rank, but to break rank ties, etc. It is mainly used for display purposes.

Table comment: Attribute to be set Mandatory from Optional or redefined. Refer to the ODF Sport Data Dictionary for each of the disciplines

Element Result /ExtendedResults /ExtendedResult (1,N)			
Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	
ValueType	O	See sport specific definition	ValueType should be used to describe the type of data @Value
IRM	O	See sport specific definition	Send appropriate IRM code if IRM at this ExtendedResult
Rank	O	See sport specific definition	Rank of the competitor for this specific ExtendedResult.
RankEqual	O	S(1)	Send Y where Rank at this specific ExtendedResult is equalled else not sent.
SortOrder	O	See sport specific definition	Similar to rank but considering all competitors (those with IRM or no rank at this ExtendedResult)
Diff	O	See sport specific definition	Time/Points etc behind leader at this ExtendedResult

Element Result /ExtendedResults /ExtendedResult /Extension (0,N)			
Attribute	M/O	Value	Description
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element Result /RecordIndicators /RecordIndicator (1,N)			
Phase result's record indicator.			
Attribute	M/O	Value	Description
Order	M	Numeric	The hierarchy (priority) for types of record from 1 to n. (Can use the Order column from CC @RecordType for reference).
Code	M	<a href="#">CC @RecordCode</a>	Code which describes the record broken by the result value.
RecordType	M	<a href="#">CC @RecordType</a>	Code which specifies the level at which the record is broken.
Equalled	O	S(1)	Send "Y" in the case that the record has been equalled else do not send.

Element Result /Competitor (1,1)			
Competitor related to one phase result.			
Attribute	M/O	Value	Description
Code	M	S(20) with no leading zeroes	Competitor's ID
Type	M	S(1)	A for athlete, T for team
Organisation	M	<a href="#">CC @Organisation</a>	Competitor's organisation
Bib	O	See table comment	Bib number

Table comment: Attribute to be set Mandatory from Optional or redefined. Refer to the ODF Sport Data Dictionary for each of the disciplines

Element Result /Competitor /Description (0,1)			
Competitors extended information.			
Attribute	M/O	Value	Description



TeamName	M	S(73)	Name of the team. Only applies for teams / groups. Not usually for pairs (figure skating & beach volleyball are the exceptions).
IFId	O	S(16)	International Federation ID

Element Result /Competitor /Description /ExtendedDescription (0,N)			
Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element Result /Competitor /Composition /Athlete (0,N)			
Attribute	M/O	Value	Description
Code	M	S(20) with no leading zeroes	Athlete's ID, corresponding to either a team member or a single athlete
Order	M	Numeric	Order attribute used to sort team members in a team (if Competitor @Type="T") or 1 if Competitor @Type="A".
Bib	O	See table comment	Bib number

Table comment: Attribute to be set Mandatory from Optional or redefined. Refer to the ODF Sport Data Dictionary for each of the disciplines

Element Result /Competitor /Composition /Athlete /Description (1,1)			
Athletes extended information.			
Attribute	M/O	Value	Description
GivenName	O	S(25)	Given name in WNPA format (mixed case)
FamilyName	M	S(25)	Family name in WNPA format (mixed case)
Gender	M	<a href="#">CC @PersonGender</a>	Gender of the athlete
Organisation	M	<a href="#">CC @Organisation</a>	Athletes' organisation
BirthDate	O	Date	Birth date (example: YYYY-MM-DD). Must include if the data is available
IFId	O	S(16)	International Federation ID
Class	O	CC @DisplineClass	Code to identify the sport class in the case of events with athletes with a disability (e.g: Paralympic Games).  This attribute is optional because it is not used in events without such athletes.
Horse	O	S(25)	Name of the athlete's horse
GuideID	O	S(20) without leading zeros	ID of the Guide, used for some athletes with a disability (e.g: Paralympic Games).
GuideFamilyName	O	S(25)	Family Name of the athlete's guide (mixed case).  Used for some athletes with a disability (e.g: Paralympic Games).
GuideGivenName	O	S(25)	Given Name of the athlete's guide (mixed case).  Used for some athletes with a disability (e.g: Paralympic Games).

Element Result /Competitor /Composition /Athlete /Description /ExtendedDescription (0,N)			
--	--	--	--



Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

**Element Result /Competitor /Composition /Athlete /ExtendedResults /ExtendedResult (1,N)**

Team member's or individual athlete's extended result, depending on whether Competitor @Type="T" or Competitor @Type="A".

Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	
ValueType	O	See sport specific definition	ValueType should be used to describe the type of data @Value
IRM	O	See sport specific definition	Send appropriate IRM code if IRM at this ExtendedResult
Rank	O	See sport specific definition	Rank of the competitor for this specific ExtendedResult.
RankEqual	O	S(1)	Send Y where Rank at this specific ExtendedResult is equalled else not sent.
SortOrder	O	See sport specific definition	Similar to rank but considering all competitors (those with IRM or no rank at this ExtendedResult
Diff	O	See sport specific definition	Time/Points etc behind leader at this ExtendedResult

**Element Result /Competitor /Composition /Athlete /ExtendedResults /ExtendedResult /Extension (0,N)**

Extensions of team member's or individual athlete's extended results.

Attribute	M/O	Value	Description
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

**Element Result /Competitor /Composition /Team (0,N)**

Attribute	M/O	Value	Description
Code	M	S(20) with no leading zeroes	Team's ID (example ATHM4X400m--ESP01, 393553) When the Team is an historical one, then this ID starts with "T".
Order	M	Numeric	Order attribute used to sort the teams if there are multiple teams else 1.
Bib	O	Defined by Discipline	Bib number, send if available (team bib)

**Element Result /Competitor /Composition /Team /Description (0,1)**

Attribute	M/O	Value	Description
TeamName	M	S(73)	Name of the team
IFId	O	S(16)	International Federation ID

**Element Result /Competitor /Composition /Team /Description /ExtendedDescription (0,N)**

Attribute	M/O	Value	Description
Type	O	See sport specific definition	

Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element Result /Competitor /Composition /Team /ExtendedResults /ExtendedResult (1,N)			
Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	
ValueType	O	See sport specific definition	ValueType should be used to describe the type of data @Value
IRM	O	See sport specific definition	Send appropriate IRM code if IRM at this ExtendedResult
Rank	O	See sport specific definition	Rank of the competitor for this specific ExtendedResult.
RankEqual	O	S(1)	Send Y where Rank at this specific ExtendedResult is equalled else not sent.
SortOrder	O	See sport specific definition	Similar to rank but considering all competitors (those with IRM or no rank at this ExtendedResult)
Diff	O	See sport specific definition	Time/Points etc behind leader at this ExtendedResult

Element Result /Competitor /Composition /Team /ExtendedResults /ExtendedResult /Extension (0,N)			
Attribute	M/O	Value	Description
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element Result /Competitor /Composition /Team /Composition /Athlete (1,N)			
Attribute	M/O	Value	Description
Code	M	S(20) with no leading zeros	Athlete ID of the team's member.
Order	O	Numeric	Team member order
Bib	O	See sport specific definition	Bib number

Element Result /Competitor /Composition /Team /Composition /Athlete /Description (1,1)			
Attribute	M/O	Value	Description
GivenName	O	S(25)	Given name in WNPA format (mixed case)
FamilyName	M	S(25)	Given name in WNPA format (mixed case)
Gender	M	<a href="#">CC @PersonGender</a>	Gender of the athlete
Organisation	M	<a href="#">CC @Organisation</a>	Athletes' organisation
BirthDate	O	Date	Birth date (example: YYYY-MM-DD). Must include if the data is available
IFId	O	S(16)	International Federation ID

Element Result /Competitor /Composition /Team /Composition /Athlete /Description /ExtendedDescription (0,N)			
Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	



Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element Result /Competitor /Composition /Team /Composition /Athlete /ExtendedResults /ExtendedResult (1,N)			
Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	
ValueType	O	See sport specific definition	ValueType should be used to describe the type of data @Value
IRM	O	See sport specific definition	Send appropriate IRM code if IRM at this ExtendedResult
Rank	O	See sport specific definition	Rank of the competitor for this specific ExtendedResult.
RankEqual	O	S(1)	Send Y where Rank at this specific ExtendedResult is equalled else not sent.
SortOrder	O	See sport specific definition	Similar to rank but considering all competitors (those with IRM or no rank at this ExtendedResult
Diff	O	See sport specific definition	Time/Points etc behind leader at this ExtendedResult

Element Result /Competitor /Composition /Team /Composition /Athlete /ExtendedResults /ExtendedResult /Extension (0,N)			
Attribute	M/O	Value	Description
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

### 2.1.9.6 Message Sort

Result @SortOrder will be the attribute used to sort the results, as the attribute @SortOrder is defined in each of the ODF Sport Data Dictionaries. Other @Order attributes will usually be used to order the rest of elements, as these elements are being requested in each of the ODF Sport Data Dictionary Documents.

## 2.1.10 Cumulative Results

### 2.1.10.1 Description

The Cumulative Results is a message containing the cumulative results for the competitors in a group of units either in a single phase or over a number of phases. This message is used when the competitor scores accumulate over the different units.

The difference between the Phase Results message (DT\_PHASE\_RESULTS) and the Cumulative Results (DT\_CUMULATIVE\_RESULT) is that the first one includes only the results for the phase independently from previous phases, while the Cumulative Results is for competitions where scores of the competitors are accumulated over a number of units and/or phases.

The Cumulative Results message is be used to send an intermediate summary of results (including rank) part way through a phase. In this case, the DocumentSubtype is used to specify the last phase or event unit that contributed results to the message.

The mandatory attributes and mandatory elements defined in this message will have to be used by all the sports, although each ODF Sport Data Dictionary will have to explain with further detail the optional attributes or optional elements of the message.

### 2.1.10.2 Header Values

The following table describes the message header attributes.

Attribute	Value	Comment
CompetitionCode	<a href="#">CC @Competition</a>	Unique ID for competition
DocumentCode	Full RSC	Each ODF Sport Data Dictionary will have to complete the explanation regarding to this attribute
DocumentSubcode	S(34) To be defined in each ODF Data Dictionary	Attribute used to extend DocumentCode
DocumentType	DT_CUMULATIVE_RESULT	Cumulative Results message
DocumentSubtype	S(20) To be defined in each ODF Data Dictionary	Attribute used to extend DocumentType
Version	1..V	Version number associated to the message's content. Ascendant number
ResultStatus	<a href="#">SC @ResultStatus</a>	It indicates the status of the results START_LIST LIVE INTERMEDIATE UNCONFIRMED UNOFFICIAL OFFICIAL PROTESTED
FeedFlag	"P"-Production "T"-Test	Test message or production message.
Date	Date	Date when the message is generated, expressed in the local time zone where the message was produced.
Time	Time	Time up to milliseconds when the message is generated, expressed in the local time zone where the message was produced.
LogicalDate	Date	Logical Date of events. This is the same as the physical day except when the unit or message transmission extends after midnight. See full explanation in ODF Foundation.

Source	<a href="#">SC_@Source</a>	Code indicating the system which generated the message.
--------	----------------------------	---

### 2.1.10.3 Trigger and Frequency

The cumulative results accumulate scores/results over a number of units so are generally sent after each DT\_RESULT message if the cumulative message applies (usually using same ResultStatus at DT\_RESULT). When there is no unit in progress the cumulative results will have INTERMEDIATE status.

The first version is generally triggered at the same time as the start list of the first unit is triggered (START\_LIST).


Where live updates are not appropriate (sport dependent) then the triggering is defined in the sport data dictionaries.

### 2.1.10.4 Message Structure

The following table defines the structure of the message.

Level 1	Level 2	Level 3	Level 4	Level 5	Level 6	Level 7	Level 8	Level 9	Level 10	Level 11
<a href="#">Competition (0.1)</a>										
	Gen									
	Sport									
	Codes									
	<a href="#">ExtendedInfos (0.1)</a>									
		<a href="#">ExtendedInfo (0.N)</a>								
			Type							
			Code							
			Pos							
			Value							
			<a href="#">Extension (0.N)</a>							
				Code						
				Pos						
				Value						
		<a href="#">Progress (0.1)</a>								
			LastUnit							
			UnitsTotal							
			UnitsComplete							
			<a href="#">Extension (0.N)</a>							
				Code						
				Pos						
				Value						
		<a href="#">SportDescription (0.1)</a>								
			DisciplineName							
			EventName							
			SubEventName							
			Gender							
		<a href="#">VenueDescription (0.1)</a>								



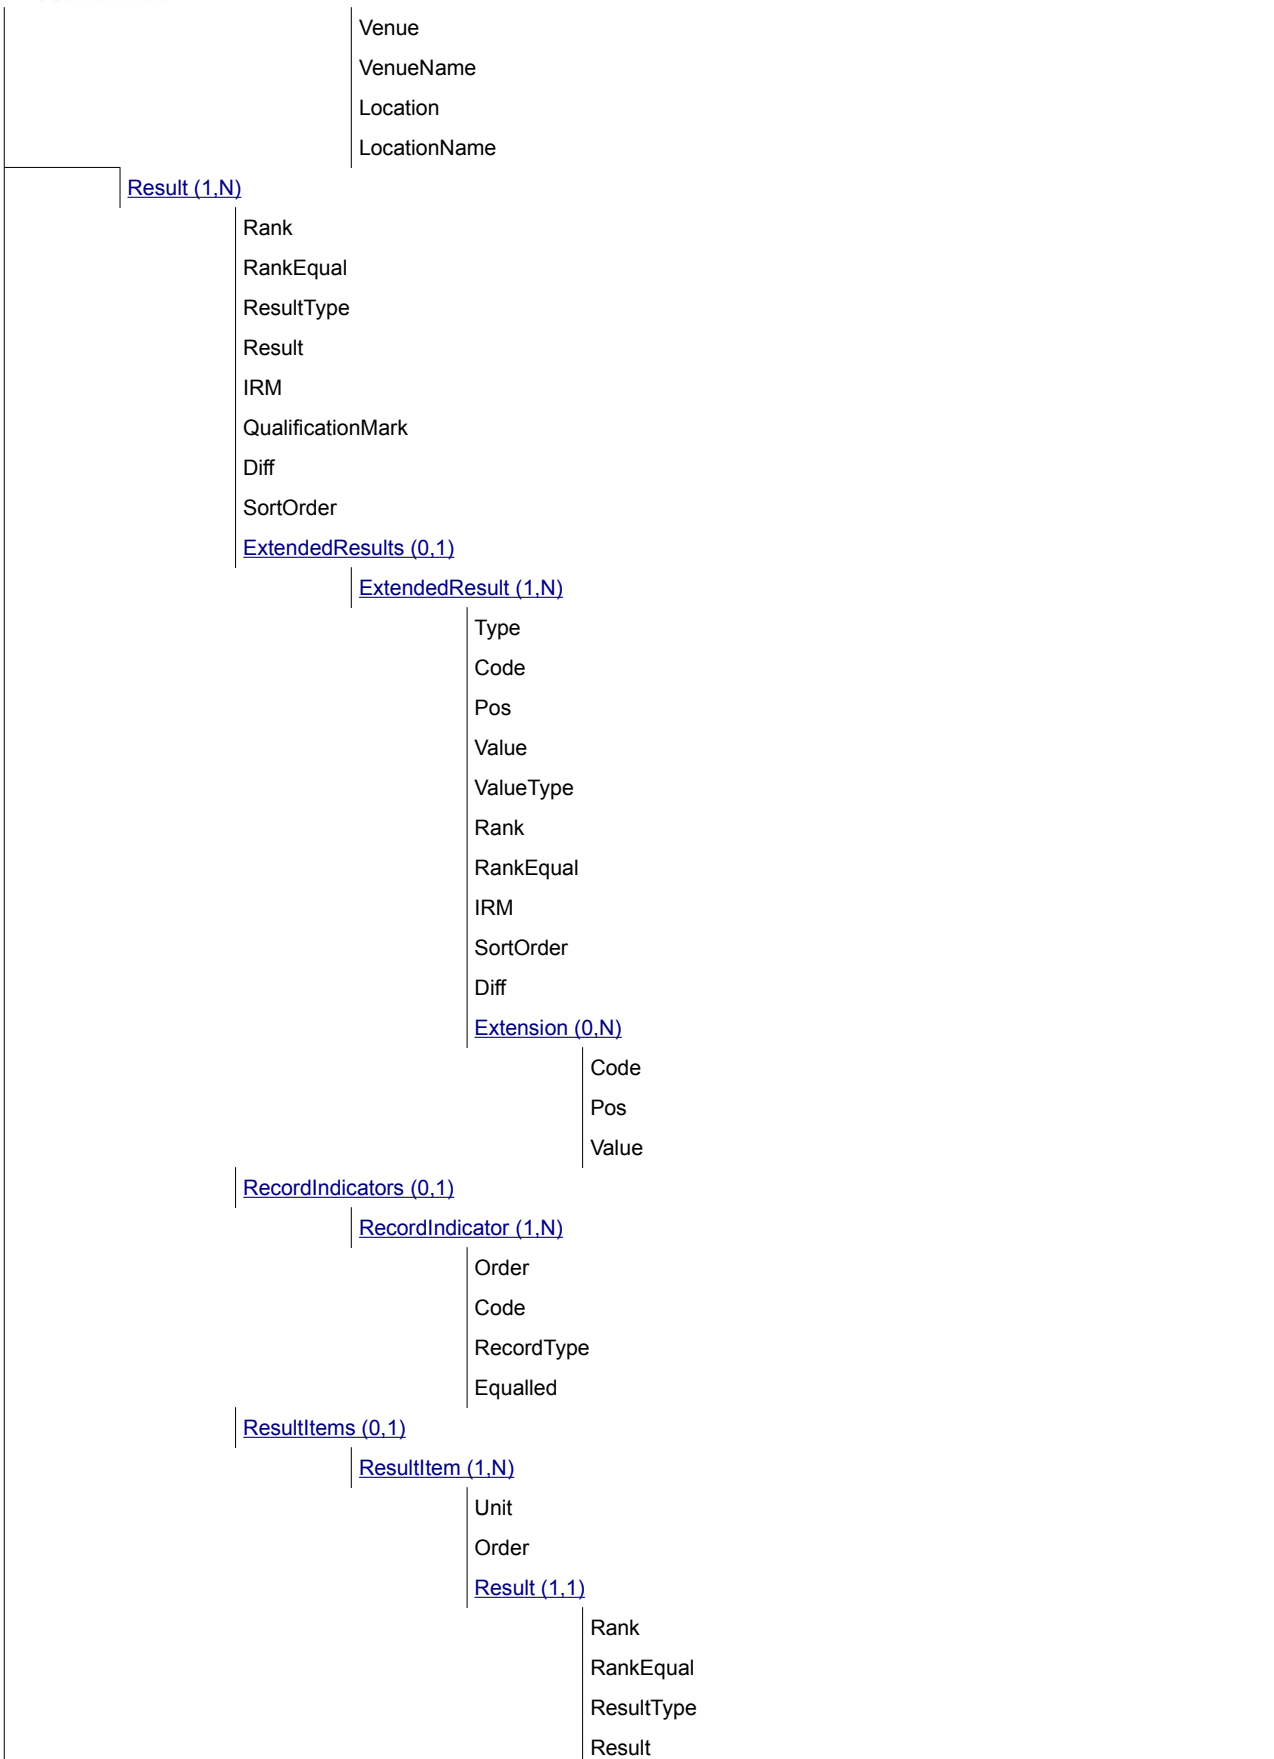



Unchecked

ResultPoints

IRM

QualificationMark

Diff

WLT

SortOrder

StartOrder

StartSortOrder

Pty

ExtendedResults (0,1)

ExtendedResult (1,N)

Type

Code

Pos

Value

Value2

ValueType

IRM

Rank

RankEqual

SortOrder

Diff

Speed

Move

Pty

Discard

Arrive

Unchecked

Extension (0,N)

Code

Pos

Value

RecordIndicators (0,1)

RecordIndicator (1,N)

Order

Code

RecordType

Equalled


Competitor (1,1)


Code

Type

Organisation

Bib

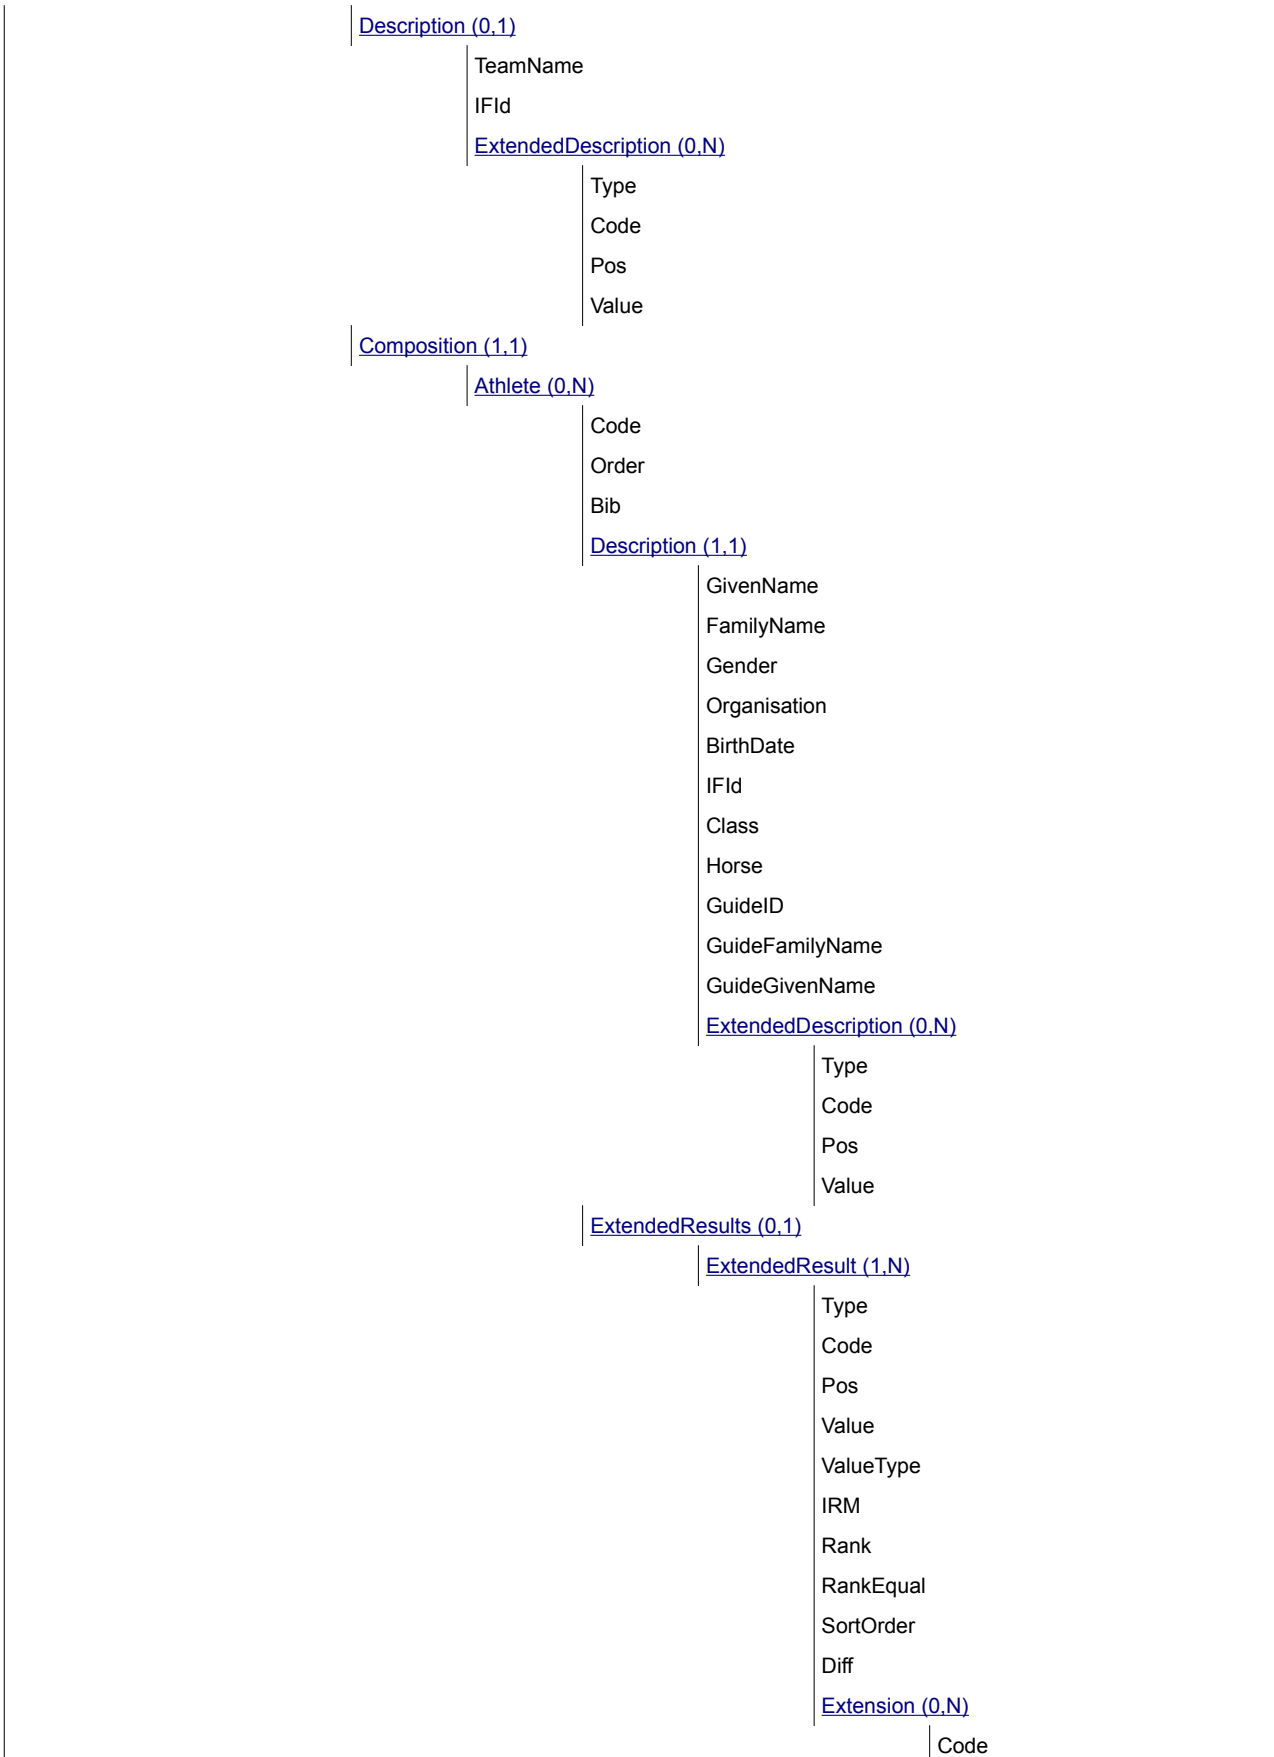

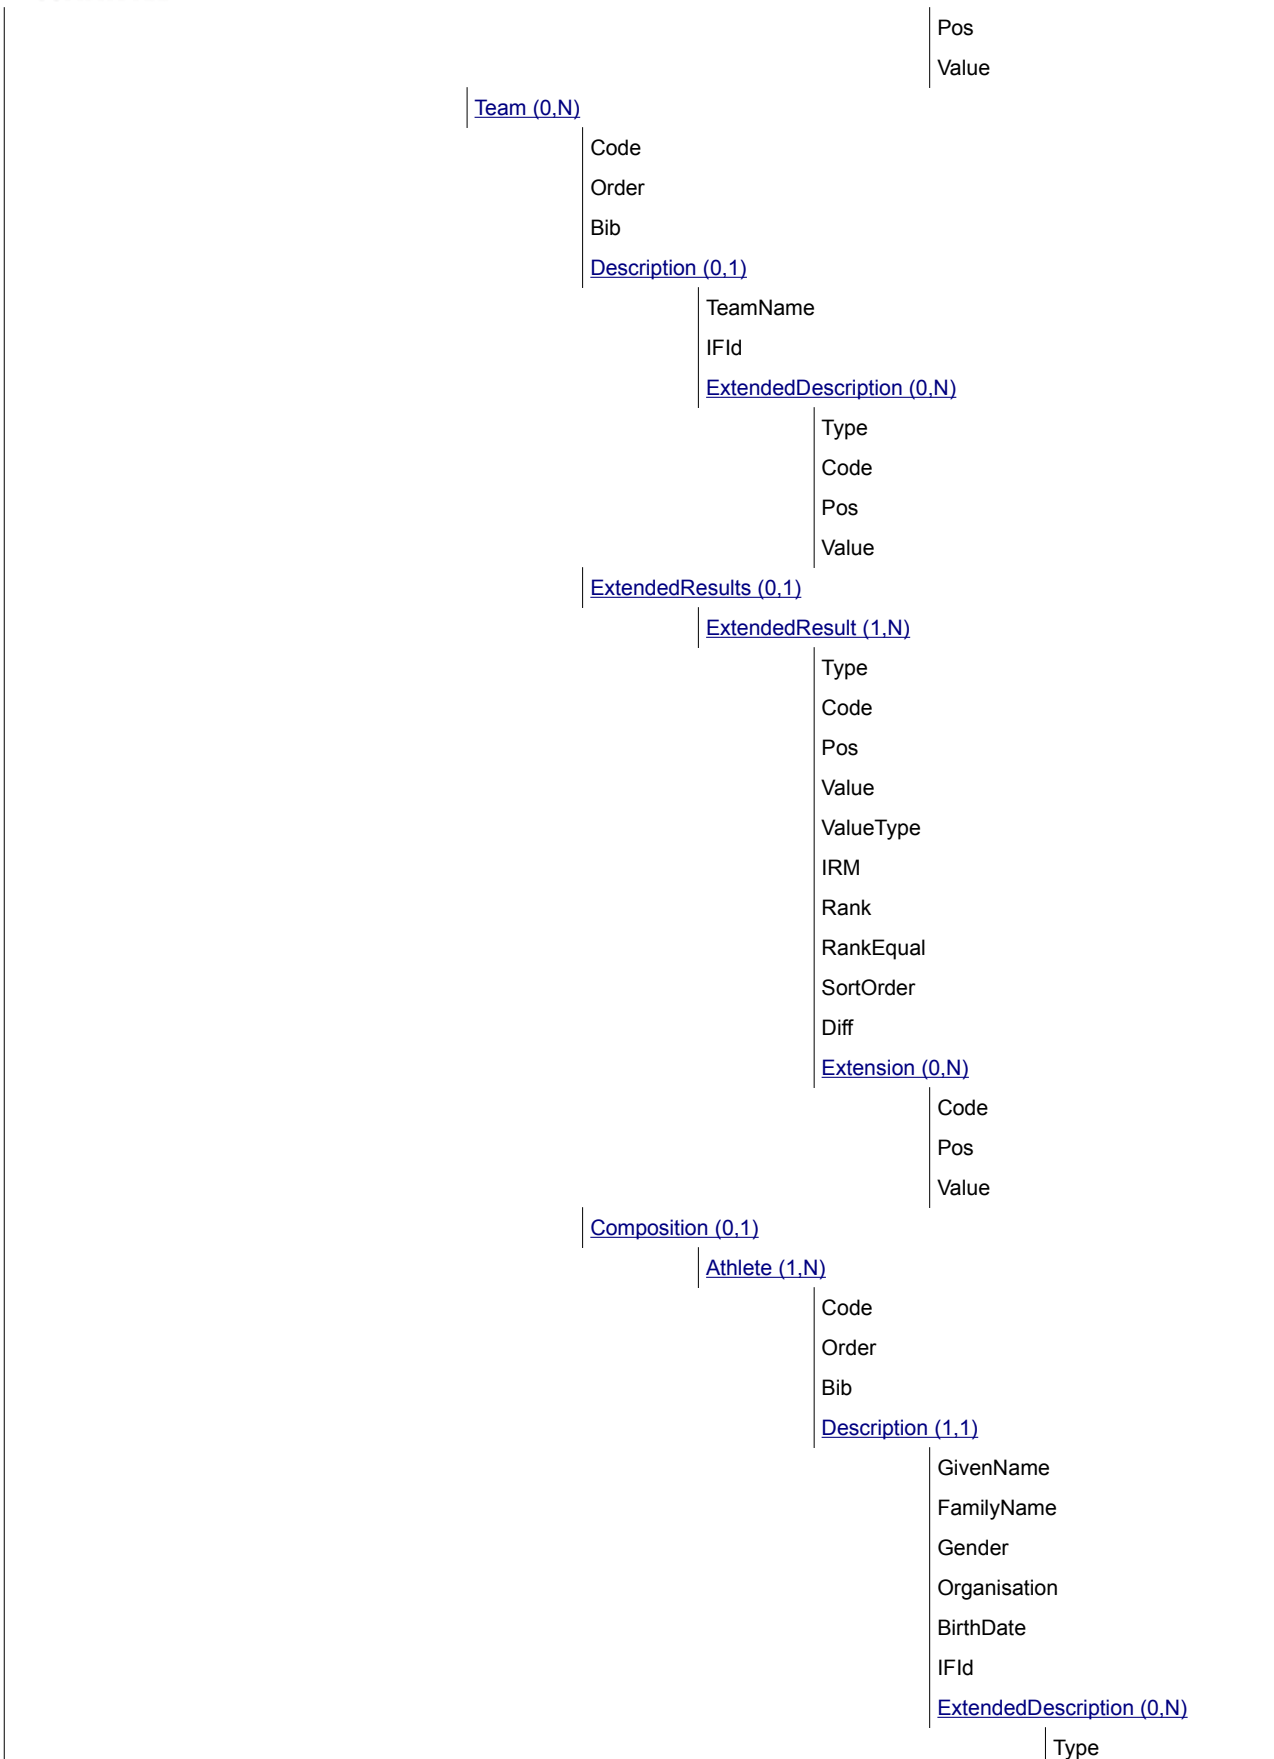





LastUnit	O	<a href="#">CC @Unit</a>	Full RSC of the last unit completed (or in progress if applicable) related to the message's content
UnitsTotal	O	Numeric ##0	Total units expected related data impacting this message.
UnitsComplete	O	Numeric ##0	Total units completed which have related data impacting this message.

Element ExtendedInfos /Progress /Extension (0,N)			
Attribute	M/O	Value	Description
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Table comment: Attribute to be set Mandatory from Optional or redefined. Refer to the ODF Sport Data Dictionary for each of the disciplines

Element ExtendedInfos /SportDescription (0,1) Sport Descriptions in Text.			
Attribute	M/O	Value	Description
DisciplineName	M	S(40)	Discipline name (not code) from Common Codes
EventName	M	S(40)	Event name (not code) from Common Codes
SubEventName	O	S(40)	Phase level short name (not code) from Common Codes. Only include if in single phase.
Gender	M	<a href="#">CC @SportGender</a>	Gender code for the event unit

Element ExtendedInfos /VenueDescription (0,1) Venue Names in Text. DO NOT INCLUDE unless all at single venue and location.			
Attribute	M/O	Value	Description
Venue	M	<a href="#">CC @VenueCode</a>	Venue Code
VenueName	M	S(25)	Venue Description (not code) from Common Codes
Location	O	<a href="#">CC @Location</a>	Location code
LocationName	O	S(30)	Location Description (not code) from Common Codes

Element Result (1,N) For any cumulative results message, there should be at least one competitor being awarded a cumulative result after one event unit or phase.			
Attribute	M/O	Value	Description
Rank	O	Text See table comment	Rank of the competitor in the cumulative result
RankEqual	O	S(1)	Identifies if a rank has been equalled. Send Y if applicable else not sent.
ResultType	O	See table comment	Type of the @Result attribute
Result	O	See table comment	The cumulative result of the competitor
IRM	O	See table comment	The invalid result mark, in case it is assigned
QualificationMark	O	See table comment	The code which gives an indication on the qualification of the competitor for the next round of the competition
Diff	O	See table comment	Display the time / value behind the leader. All fill when applicable, 0.0 for leader, negative for in front of leader,



			positive for behind. For example +3.45 means 3.45 sec behind the leader, -1.23 means -1.23 sec in front of (better than) the leader.
SortOrder	M	Numeric See table comment	Used to sort all cumulative results, based on rank, but to break rank ties, etc. It is mainly used for display purposes.

Table comment: Attribute to be set Mandatory from Optional or redefined. Refer to the ODF Sport Data Dictionary for each of the disciplines

Element Result /ExtendedResults /ExtendedResult (1,N)			
Team competitor's extended results.			
Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	
ValueType	O	See sport specific definition	ValueType should be used to describe the type of data @Value
Rank	O	See sport specific definition	Rank of the competitor for this specific ExtendedResult.
RankEqual	O	S(1)	Send Y where Rank at this specific ExtendedResult is equalled else not sent.
IRM	O	See sport specific definition	Send appropriate IRM code if IRM at this ExtendedResult
SortOrder	O	See sport specific definition	Similar to rank but considering all competitors (those with IRM or no rank at this ExtendedResult)
Diff	O	See sport specific definition	Time/Points etc behind leader at this ExtendedResult

Element Result /ExtendedResults /ExtendedResult /Extension (0,N)			
Attribute	M/O	Value	Description
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element Result /RecordIndicators /RecordIndicator (1,N)			
Cumulative result's record indicator.			
Attribute	M/O	Value	Description
Order	M	Numeric	The hierarchy (priority) for types of record from 1 to n. (Can use the Order column from CC @RecordType for reference).
Code	M	<a href="#">CC @RecordCode</a>	Code which describes the record broken by the result value.
RecordType	M	<a href="#">CC @RecordType</a>	Code which specifies the level at which the record is broken.
Equalled	O	S(1)	Send Y in the case that the record has been equalled else do not send.

Element Result /ResultItems /ResultItem (1,N)			
Identifier of unit, for the schedule item to which it is going to be included the result summary. ResultItem /Result will be for one particular previous unit.			
Attribute	M/O	Value	Description
Unit	M	See table comment	Unit code of the latest RSC schedule item to which the cumulative results is updated to. It may be at phase or unit level.
Order	O	Numeric	Logical order of the sub-units, usually schedule order.

		#0	
--	--	----	--

Table comment: Attribute to be set Mandatory from Optional or redefined. Refer to the ODF Sport Data Dictionary for each of the disciplines

<b>Element Result /ResultItems /ResultItem /Result (1,1)</b>			
<b>For any Event Unit Results message, there should be at least one competitor being awarded a result for the event unit.</b>			
<b>Attribute</b>	<b>M/O</b>	<b>Value</b>	<b>Description</b>
Rank	O	Text See table comment	Rank of the competitor in the result for the event unit or phase identified by /ResultItems /ResultItem.
RankEqual	O	S(1)	Identifies if a rank has been equalled. Send Y if applicable else not sent.
ResultType	O	See table comment	Type of the @Result attribute for the event unit or phase identified by /ResultItems /ResultItem. This is relative the value in Result below.
Result	O	See table comment	The result of the competitor in the event unit for the event unit or phase identified by /ResultItems /ResultItem. This is usually the 'raw' result but is detailed in each data dictionary.
Unchecked	O	See table comment	Send with ="Y" in the case that there is a value which needs to be validated. For example by reading photo to change from transponder times. Do not send if not ="Y"
ResultPoints	O	See table comment	If the 'raw' score is converted to points to calculate the overall result then put the points here.
IRM	O	See table comment	The invalid result mark, in case it is assigned for the event unit or phase identified by /ResultItems /ResultItem
QualificationMark	O	See table comment	The code which gives an indication on the qualification of the competitor for the next round of the competition for the event unit or phase identified by /ResultItems /ResultItem
Diff	O	See table comment	Display the time / value behind the leader. All fill when applicable, 0.0 for leader, negative for in front of leader, positive for behind. For example +3.45 means 3.45 sec behind the leader, -1.23 means -1.23 sec in front of (better than) the leader.
WLT	O	See table comment	The code whether a competitor won, lost or tied the match / game for the event unit identified by /ResultItems /ResultItem. It just applied to event units
SortOrder	M	Numeric See table comment	Used to sort all results in an event unit or phase identified by /ResultItems /ResultItem
StartOrder	O	Numeric See table comment	Competitors's start order
StartSortOrder	O	Numeric See table comment	Used to sort all start list competitors in an event unit.
Pty	O	See table comment	Penalty information

Table comment: Attribute to be set Mandatory from Optional or redefined. Refer to the ODF Sport Data Dictionary for each of the disciplines

<b>Element Result /ResultItems /ResultItem /Result /ExtendedResults /ExtendedResult (1,N)</b>			
<b>Attribute</b>	<b>M/O</b>	<b>Value</b>	<b>Description</b>
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	





Value	O	See sport specific definition	
Value2	O	See sport specific definition	
ValueType	O	See sport specific definition	ValueType should be used to describe the type of data @Value
IRM	O	See sport specific definition	Send appropriate IRM code if IRM at this ExtendedResult
Rank	O	See sport specific definition	Rank of the competitor for this specific ExtendedResult
RankEqual	O	S(1)	Send Y where Rank at this specific ExtendedResult is equalled else not sent.
SortOrder	O	See sport specific definition	Similar to rank but considering all competitors (those with IRM or no rank at this ExtendedResult)
Diff	O	See sport specific definition	Time/Points etc behind leader at this ExtendedResult
Speed	O	See sport specific definition	Speed at this ExtendedResult
Move	O	See sport specific definition	Change in rank compared to the previous ExtendedResult
Pty	O	See sport specific definition	Penalty information
Discard	O	See sport specific definition	Used when data is to be discarded
Arrive	O	See sport specific definition	Related to arrival information
Unchecked	O	S(1)	Send Y where the result @Value has not been appropriately validated (sport specific) else do not send.

**Element Result /ResultItems /ResultItem /Result /ExtendedResults /ExtendedResult / Extension (0,N)**

**Extensions of ResultItem if required.**

Attribute	M/O	Value	Description
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

**Element Result /ResultItems /ResultItem /Result /RecordIndicators /RecordIndicator (1,N)**

**Result's record indicator.**

Attribute	M/O	Value	Description
Order	M	Numeric	The hierarchy (priority) for types of record from 1 to n. Can use the Order column from CC @RecordType for reference).
Code	M	<a href="#">CC @RecordCode</a>	Code which describes the record broken by the result value.
RecordType	M	<a href="#">CC @RecordType</a>	Code which specifies the level at which the record is broken.
Equalled	O	S(1)	Send Y in the case that the record has been equalled else do not send.

**Element Result /Competitor (1,1)**

**Competitor related to one cumulative result.**

Attribute	M/O	Value	Description
Code	M	S(20) with no leading zeroes Or Organisation code in the case of NOC or NPC	Competitor's ID
Type	M	S(1)	A for athlete, T for team, N for NOC or NPC
Organisation	M	<a href="#">CC @Organisation</a>	Competitor's organisation
Bib	O	See table comment	Bib number

Table comment: Attribute to be set Mandatory from Optional or redefined. Refer to the ODF Sport Data Dictionary for each of the disciplines

Element Result /Competitor /Description (0,1)			
Competitors extended information.			
Attribute	M/O	Value	Description
TeamName	M	S(73)	Name of the team. Only applies for teams / groups. Not usually for pairs (figure skating & beach volleyball are the exceptions).
IFId	O	S(16)	International Federation ID

Element Result /Competitor /Description /ExtendedDescription (0,N)			
Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element Result /Competitor /Composition /Athlete (0,N)			
Attribute	M/O	Value	Description
Code	M	S(20) with no leading zeroes	Athlete's ID, corresponding to either a team member or a single athlete
Order	M	Numeric	Order attribute used to sort team members in a team (if Competitor @Type="T") or 1 if Competitor @Type="A".
Bib	O	See table comment	Bib number

Table comment: Attribute to be set Mandatory from Optional or redefined. Refer to the ODF Sport Data Dictionary for each of the disciplines

Element Result /Competitor /Composition /Athlete /Description (1,1)			
Athletes extended information.			
Attribute	M/O	Value	Description
GivenName	O	S(25)	Given name in WNPA format (mixed case)
FamilyName	M	S(25)	Family name in WNPA format (mixed case)
Gender	M	<a href="#">CC @PersonGender</a>	Gender of the athlete
Organisation	M	<a href="#">CC @Organisation</a>	Athletes' organisation
BirthDate	O	Date	Birth date (example: YYYY-MM-DD). Must include if the data is available
IFId	O	S(16)	International Federation ID
Class	O	CC @DisplineClass	Code to identify the sport class in the case of events with athletes with a disability (e.g: Paralympic Games).  This attribute is optional because it is not used in events without such athletes.
Horse	O	S(25)	Name of the athlete's horse
GuideID	O	S(20) without leading zeros	ID of the Guide, used for some athletes with a disability (e.g: Paralympic Games).
GuideFamilyName	O	S(25)	Family Name of the athlete's guide (mixed case).  Used for some athletes with a disability (e.g: Paralympic Games).
GuideGivenName	O	S(25)	Given Name of the athlete's guide (mixed case).



			Used for some athletes with a disability (e.g: Paralympic Games).
--	--	--	---

Element Result /Competitor /Composition /Athlete /Description /ExtendedDescription (0,N)			
Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element Result /Competitor /Composition /Athlete /ExtendedResults /ExtendedResult (1,N)			
Team member's or individual athlete's extended result, depending on whether Competitor @Type="T" or Competitor @Type="A".			
Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	
ValueType	O	See sport specific definition	ValueType should be used to describe the type of data @Value
IRM	O	See sport specific definition	Send appropriate IRM code if IRM at this ExtendedResult
Rank	O	See sport specific definition	Rank of the competitor for this specific ExtendedResult.
RankEqual	O	S(1)	Send Y where Rank at this specific ExtendedResult is equalled else not sent.
SortOrder	O	See sport specific definition	Similar to rank but considering all competitors (those with IRM or no rank at this ExtendedResult
Diff	O	See sport specific definition	Time/Points etc behind leader at this ExtendedResult

Element Result /Competitor /Composition /Athlete /ExtendedResults /ExtendedResult /Extension (0,N)			
Extensions of team member's or individual athlete's extended results.			
Attribute	M/O	Value	Description
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element Result /Competitor /Composition /Team (0,N)			
Attribute	M/O	Value	Description
Code	M	S(20) with no leading zeroes	Team's ID (example ATHM4X400m--ESP01, 393553) When the Team is an historical one, then this ID starts with "T".
Order	M	Numeric	Order attribute used to sort the teams if there are multiple teams else 1.
Bib	O	See sport specific definition	Team Bib number

Element Result /Competitor /Composition /Team /Description (0,1)			
Attribute	M/O	Value	Description
TeamName	M	S(73)	Name of the team.
IFId	O	S(16)	International Federation ID

Element Result /Competitor /Composition /Team /Description /ExtendedDescription (0,N)			
Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Table comment: Attribute to be set Mandatory from Optional or redefined. Refer to the ODF Sport Data Dictionary for each of the disciplines

Element Result /Competitor /Composition /Team /ExtendedResults /ExtendedResult (1,N)			
Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	
ValueType	O	See sport specific definition	ValueType should be used to describe the type of data @Value
IRM	O	See sport specific definition	Send appropriate IRM code if IRM at this ExtendedResult
Rank	O	See sport specific definition	Rank of the competitor for this specific ExtendedResult.
RankEqual	O	S(1)	Send Y where Rank at this specific ExtendedResult is equalled else not sent.
SortOrder	O	See sport specific definition	Similar to rank but considering all competitors (those with IRM or no rank at this ExtendedResult)
Diff	O	See sport specific definition	Time/Points etc behind leader at this ExtendedResult

Table comment: Attribute to be set Mandatory from Optional or redefined. Refer to the ODF Sport Data Dictionary for each of the disciplines

Element Result /Competitor /Composition /Team /ExtendedResults /ExtendedResult /Extension (0,N)			
Attribute	M/O	Value	Description
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Table comment: Attribute to be set Mandatory from Optional or redefined. Refer to the ODF Sport Data Dictionary for each of the disciplines

Element Result /Competitor /Composition /Team /Composition /Athlete (1,N)			
Attribute	M/O	Value	Description
Code	M	S(20) with no leading zeros	Athlete ID of the team's member.
Order	O	Numeric	Team member order
Bib	O	See sport specific definition	Bib number

Element Result /Competitor /Composition /Team /Composition /Athlete /Description (1,1)			
Attribute	M/O	Value	Description
GivenName	O	S(25)	Given name in WNPA format (mixed case)
FamilyName	M	S(25)	Family name in WNPA format (mixed case)



Gender	M	<a href="#">CC.@PersonGender</a>	Gender of the athlete
Organisation	O	<a href="#">CC.@Organisation</a>	Athletes' organisation
BirthDate	O	Date	Birth date (example: YYYY-MM-DD). Must include if the data is available
IFld	O	S(16)	International Federation ID

Element Result /Competitor /Composition /Team /Composition /Athlete /Description /ExtendedDescription (0,N)			
Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Table comment: Attribute to be set Mandatory from Optional or redefined. Refer to the ODF Sport Data Dictionary for each of the disciplines

Element Result /Competitor /Composition /Team /Composition /Athlete /ExtendedResults /ExtendedResult (1,N)			
Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	
ValueType	O	See sport specific definition	ValueType should be used to describe the type of data @Value
IRM	O	See sport specific definition	Send appropriate IRM code if IRM at this ExtendedResult
Rank	O	See sport specific definition	Rank of the competitor for this specific ExtendedResult.
RankEqual	O	S(1)	Send Y where Rank at this specific ExtendedResult is equalled else not sent.
SortOrder	O	See sport specific definition	Similar to rank but considering all competitors (those with IRM or no rank at this ExtendedResult)
Diff	O	See sport specific definition	Time/Points etc behind leader at this ExtendedResult

Table comment: Attribute to be set Mandatory from Optional or redefined. Refer to the ODF Sport Data Dictionary for each of the disciplines

Element Result /Competitor /Composition /Team /Composition /Athlete /ExtendedResults /ExtendedResult /Extension (0,N)			
Attribute	M/O	Value	Description
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Table comment: Attribute to be set Mandatory from Optional or redefined. Refer to the ODF Sport Data Dictionary for each of the disciplines

### 2.1.10.6 Message Sort

The ResultItems should be ordered in the same order in which they took place, earliest to latest.

Result @SortOrder will be the attribute used to sort the results, as the attribute @SortOrder is defined in each of the ODF Sport Data Dictionaries. Other @Order attributes will usually be used to order the rest of elements, as these elements are being requested in each of the ODF Sport Data Dictionary Documents.



INTERNATIONAL  
OLYMPIC  
COMMITTEE

SOG-2020-GEN-2.2 APP

Where the order is not otherwise defined by the sport, during a unit (particularly units where athletes participate one-by-one). Then the order should be:

- 1) All athletes finished the current unit ordered by overall rank
- 2) All athletes on course (in the order of their result at the intermediate; in case of several intermediates from the one further down the course to the one nearest to the start)
- 3) All athlete still to start in the current unit (start order)
- 4) All athletes not qualified, but having a score from previous units
- 5) All athletes with IRM (sorting according to Discipline/ORIS standard order)

## 2.1.11 Image

### 2.1.11.1 Description

The Image message is a message containing an image or images file(s) in .jpg or .png format encapsulated in a XML message.

The type of image may vary from discipline to discipline and could be a photofinish image or some other type of image to support the results of the discipline.

The message allows for multiple images but it is assumed the images are related (could be different resolutions, different states of a competition or different places in photofinish photos) hence only one description. Unrelated images should be sent separately.

When the DocumentSubtype is PHOTOFINISH or UNIFORM then no extensions are to be used to have all disciplines use the same structure.

### 2.1.11.2 Header Values

The following table describes the message header attributes.

Attribute	Value	Comment
CompetitionCode	<a href="#">CC @Competition</a>	Unique ID for competition
DocumentCode	Full RSC	
DocumentSubcode	S(34)	Picture number or may be redefined by discipline as needed.
DocumentType	DT_IMAGE	Image message
DocumentSubtype	S(20)	This is defined by the needs of the sport. Sport specific values are defined in the sport data dictionary. Examples of the possible values are: PHOTOFINISH STROKETRAIL UNIFORM Always refer to the sport specific data dictionary for use
Version	1..V	Version number associated to the message's content. Ascendant number
ResultStatus	<a href="#">SC @ResultStatus</a>	Only applicable status is OFFICIAL
FeedFlag	"P"-Production "T"-Test	Test message or production message.
Date	Date	Date when the message is generated, expressed in the local time zone where the message was produced.
Time	Time	Time up to milliseconds when the message is generated, expressed in the local time zone where the message was produced.
LogicalDate	Date	Logical Date of events. This is the same as the physical day except when the unit or message transmission extends after midnight. See full explanation in ODF Foundation.
Source	<a href="#">SC @Source</a>	Code indicating the system which generated the message.

### 2.1.11.3 Trigger and Frequency

Trigger and frequency defined in ORIS (or PRIS) or may be varied in the sport specific data dictionary.

Trigger also after any change.




### 2.1.11.4 Message Structure

The following table defines the structure of the message.

Level 1	Level 2	Level 3	Level 4	Level 5	Level 6	Level 7	Level 8
<a href="#">Competition (0.1)</a>	Gen						
	Sport						
	Codes						
	<a href="#">ExtendedInfos (0.1)</a>						
		<a href="#">ExtendedInfo (1.N)</a>					
			Type				
			Code				
			Pos				
			Value				
			<a href="#">Extension (0.N)</a>				
					Code		
					Pos		
					Value		
<a href="#">RightsInfo (0.1)</a>	CopyrightHolder						
	Notice						
	Usage						
	<a href="#">Extension (0.N)</a>						
			Code				
			Pos				
		Value					
<a href="#">ContentInfo (0.1)</a>	Title						
	Description						
	<a href="#">Extension (0.N)</a>						
			Code				
			Pos				
		Value					
<a href="#">Image (1.N)</a>	Pos						
	Version						
	Revision						
	ImageType						
	<a href="#">Result (0.N)</a>						
			Result				
			Rank				
			StartOrder				
			SortOrder				
			<a href="#">Competitor (1.1)</a>				
					Code		



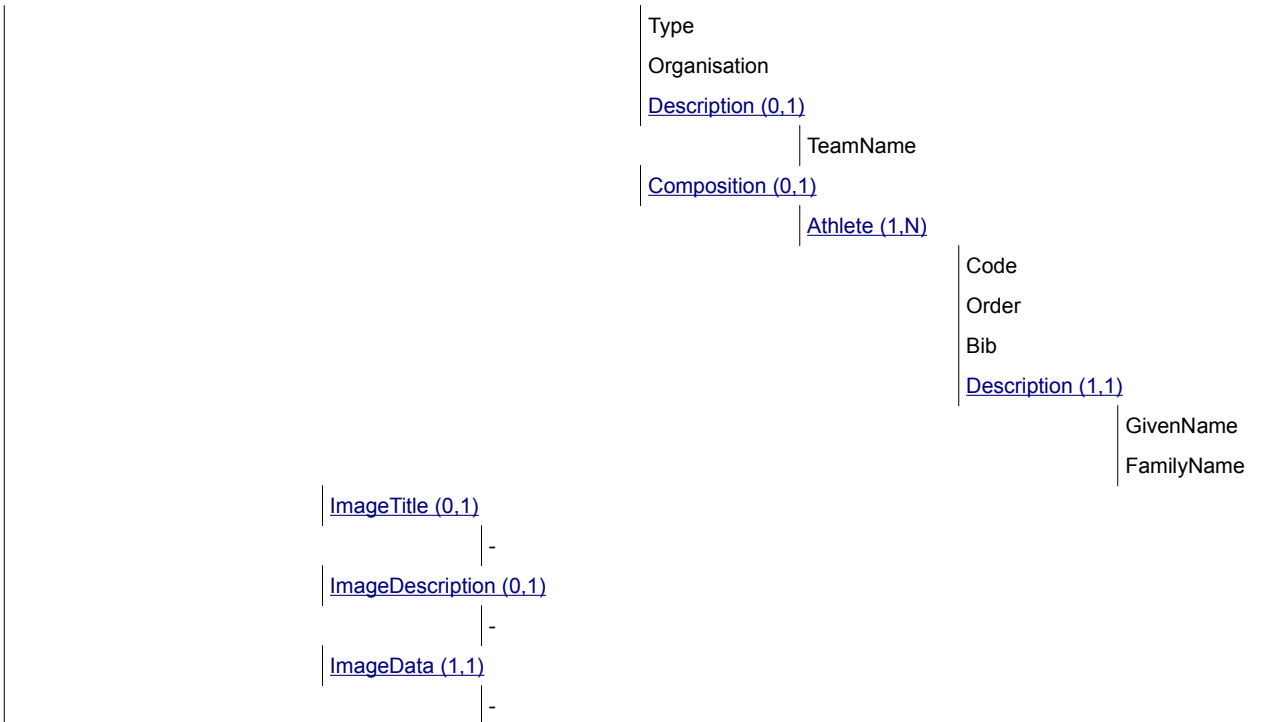

### 2.1.11.5 Message Values

Element Competition (0,1)			
Attribute	M/O	Value	Description
Gen	O	S(20)	Version of the General Data Dictionary applicable to the message
Sport	O	S(20)	Version of the Sport Data Dictionary applicable to the message
Codes	O	S(20)	Version of the Codes applicable to the message

Element Competition /ExtendedInfos /ExtendedInfo (1,N)			
Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element Competition /ExtendedInfos /ExtendedInfo /Extension (0,N)			
Attribute	M/O	Value	Description
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element Competition /RightsInfo (0,1)			
Attribute	M/O	Value	Description
CopyrightHolder	O	S(50)	Name of the copyright holder



Notice	O	S(50)	The appropriate copyright notice
Usage	O	String	Usage rules

Element Competition /RightsInfo /Extension (0,N)			
Attribute	M/O	Value	Description
Code	M	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element Competition /ContentInfo (0,1)			
Attribute	M/O	Value	Description
Title	O	S(50)	Title of the image(s)
Description	O	String	Any Description of the image

Element Competition /ContentInfo /Extension (0,N)			
Attribute	M/O	Value	Description
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element Competition /Image (1,N)			
Attribute	M/O	Value	Description
Pos	M	Numeric #0	Used as differentiator if there are multiple images in the message. In the case of different holes in golf the numbers 1..18 could be used.
Version	M	Numeric #0	Document Version
Revision	M	Numeric #0	Document Revision
ImageType	M	S(3)	Image type extension, jpg or png

Element Competition /Image /Result (0,N)			
Attribute	M/O	Value	Description
Result	O	S(20)	Result of the competitor in the image. Formatted as appropriate in the event. Use IRM code if appropriate.
Rank	O	S(10)	Rank of the competitor
StartOrder	O	S(4)	Start or lane position
SortOrder	M	Numeric ###0	This attribute is a sequential number with the order of the competitors in the image.

Element Competition /Image /Result /Competitor (1,1)			
Attribute	M/O	Value	Description
Code	O	S(20) with no leading zeroes	Competitor's ID (Team or individual) If it is possible to send the ID it should be included.
Type	O	S(1)	A for athlete or T for team. If it is possible to send the type it should be included.



Organisation	O	<a href="#">CC_@Organisation</a>	Competitor's organisation
--------------	---	----------------------------------	---------------------------

Element Competition /Image /Result /Competitor /Description (0,1)			
Attribute	M/O	Value	Description
TeamName	O	S(73)	Name of the Team.

Element Competition /Image /Result /Competitor /Composition /Athlete (1,N)			
Only sent in the case of individual events. Team members are not sent in team events.			
Attribute	M/O	Value	Description
Code	O	S(20) with no leading zeroes	Athlete's ID. If it is possible to send the ID it should be included.
Order	M	Numeric ##0	Order attribute used to sort team members in a team. Send 1 for individuals.
Bib	O	S(4)	Bib number

Element Competition /Image /Result /Competitor /Composition /Athlete /Description (1,1)			
Attribute	M/O	Value	Description
GivenName	O	S(25)	Given name (Photofinish Name)
FamilyName	M	S(25)	Family name (Photofinish Name)

Element Competition /Image /ImageTitle (0,1)			
Attribute	M/O	Value	Description
-	O	Free Text	Image title if applicable.

Element Competition /Image /ImageDescription (0,1)			
Attribute	M/O	Value	Description
-	O	Free Text	Image description if applicable.

Element Competition /Image /ImageData (1,1)			
Attribute	M/O	Value	Description
-	M	Free Text	The ImageData element has a body consisting of one Base64-encoded report (a jpeg or png file)

**Sample (Photofinish - Individual)**



```
<Competition>
  <RightsInfo CopyrightHolder="OMEGA" Notice="rg" Usage="er" />
  <Image Pos="1" Version="1" Revision="0" ImageType="jpg">
    <Result Rank="1" StartOrder="1" SortOrder="1">
      <Competitor Organisation="NOR">
        <Composition>
          <Athlete Order="1" Bib="1">
            <Description GivenName="Ola Vigen" FamilyName="HATTESTAD" />
          </Athlete>
        </Composition>
      </Competitor>
    </Result>
    <Result Rank="2" StartOrder="1" SortOrder="2">
      <Competitor Organisation="SWE">
        <Composition>
          <Athlete Order="1" Bib="6">
            <Description GivenName="Teodor" FamilyName="PETERSON" />
          </Athlete>
        </Composition>
      </Competitor>
    </Result>
  ...
  <ImageData>/9j/4AAQSkZJRgABAQAAAQABAAD/7...Q==</ImageData>
</Image>
</Competition>
```

### Sample (Photofinish - Team)

```
<Competition>
  <RightsInfo CopyrightHolder="OMEGA" Notice="rg" Usage="er" />
  <Image Pos="1" Version="1" Revision="0" ImageType="jpg">
    <Result Rank="1" StartOrder="1" SortOrder="1">
      <Competitor Organisation="NOR">
        <Composition>
          <Athlete Order="1" Bib="1">
            <Description GivenName="" FamilyName="NORWAY" />
          </Athlete>
        </Composition>
      </Competitor>
    </Result>
    <Result Rank="2" StartOrder="1" SortOrder="2">
      <Competitor Organisation="SWE">
        <Composition>
          <Athlete Order="1" Bib="6">
            <Description GivenName="" FamilyName="SWEDEN" />
          </Athlete>
        </Composition>
      </Competitor>
    </Result>
  ...
  <ImageData>/9j/4AAQSk...2Q==</ImageData>
</Image>
</Competition>
```

### Sample (Stroke Trail)



```
<OdfBody CompetitionCode="OG2012" DocumentType="DT_IMAGE" DocumentSubtype="STROKETRAIL"
Date="2016-08-08" Time="120830417" LogicalDate="2016-08-08" Source="GOSTA1" FeedFlag="P"
DocumentCode="GLFWSTROKE-----FNL-000101--" DocumentSubcode="4352682" Version="1">
<Competition>
<Image Pos="1" Version="1" Revision="0" ImageType="png" >
<ImageData>/9j/4AAQSkZJRgABAQEAAAAAAAAA ETC ETC Lj5OXm5+jp6vHy8/T+uit//2Q==</ImageData>
</Image>
<Image Pos="2" Version="1" Revision="0" ImageType="png" >
<ImageData>/9j/4AAQSkZJRgABAQEAAAAAAAAA ETC ETC Lj5OXm5+jp6vHy8/T+uit//2Q==</ImageData>
</Image>
</Competition>
</OdfBody>
```

### 2.1.11.6 Message Sort

Sort by Competition /Image /Pos and SortOrder within image.

## 2.1.12 Press Photofinish

### 2.1.12.1 Description

The Press Photofinish message contains a link to the Press Diffusion Document for a particular event unit. It is a PDF containing the photo finish picture (uncompressed) which includes judgment markers as well as all necessary additional information.

It is a generic message for all sports.

### 2.1.12.2 Header Values

The following table describes the message header attributes.

Attribute	Value	Comment
CompetitionCode	<a href="#">CC @Competition</a>	Unique ID for competition
DocumentCode	<a href="#">CC @Unit</a>	Full RSC of the Unit related to the image
DocumentSubcode	S(10)	Picture number
DocumentType	DT_PRESSPHOTOFINISH_LK	Press Photofinish message
Version	1..V	Version number associated to the message's content. Ascendant number
ResultStatus	<a href="#">SC @ResultStatus</a>	Only applicable status is OFFICIAL
FeedFlag	"P"-Production "T"-Test	Test message or production message.
Date	Date	Date when the message is generated, expressed in the local time zone where the message was produced.
Time	Time	Time up to milliseconds when the message is generated, expressed in the local time zone where the message was produced.
LogicalDate	Date	Logical Date of events. This is the same as the physical day except when the unit or message transmission extends after midnight. See full explanation in ODF Foundation.
Source	<a href="#">SC @Source</a>	Code indicating the system which generated the message.

### 2.1.12.3 Trigger and Frequency

Trigger when available.

Trigger also after any major change.

### 2.1.12.4 Message Structure

The following table defines the structure of the message.

Level 1	Level 2	Level 3	Level 4	Level 5
<a href="#">Competition (0.1)</a>	Gen Sport Codes			
	<a href="#">ExtendedInfos (0.1)</a>	<a href="#">ExtendedInfo (1.N)</a>	Type Code Pos	

		Value <a href="#">Extension (0,N)</a>	Code Pos Value
	<a href="#">PhotoFinish (1,1)</a>	Version Revision Link	

### 2.1.12.5 Message Values

Element Competition (0,1)			
Attribute	M/O	Value	Description
Gen	O	S(20)	Version of the General Data Dictionary applicable to the message
Sport	O	S(20)	Version of the Sport Data Dictionary applicable to the message
Codes	O	S(20)	Version of the Codes applicable to the message

Element ExtendedInfos /ExtendedInfo (1,N)			
Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element ExtendedInfos /ExtendedInfo /Extension (0,N)			
Attribute	M/O	Value	Description
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element PhotoFinish (1,1)			
Attribute	M/O	Value	Description
Version	M	Numeric	Document version: 1..9999
Revision	M	Numeric	Document version: 1..9999
Link	M	S(255)	URL of the link to the document

### 2.1.12.6 Message Sort

There is no message sorting requirement for this message.

## 2.1.13 Pool Standings

### 2.1.13.1 Description

The Pool Standings message contains the standings of a group in a competition. It is similar to the Phase Results message, except in the frequency and trigger. Here the message is triggered at the start of OVR operations and then after each event unit (game, match, etc.).

This report is sent independently for each of the groups / pools of the competition in a particular phase, and the group / pool can be determined from the message headers (DocumentCode and DocumentSubtype).

The mandatory attributes and mandatory elements defined in this message will have to be used by all the sports, although each ODF Sport Data Dictionary will have to explain with further detail the optional attributes or optional elements of the message.

### 2.1.13.2 Header Values

The following table describes the message header attributes.

Attribute	Value	Comment
CompetitionCode	<a href="#">CC.@Competition</a>	Unique ID for competition
DocumentCode	<a href="#">CC.@Phase</a>	Full Phase level RSC
DocumentSubcode	S(34) To be defined in each ODF Data Dictionary	Attribute used to extend DocumentCode.
DocumentType	DT_POOL_STANDING	Pool Standings message
DocumentSubtype	S(20) To be defined in each ODF Data Dictionary	Attribute used to extend DocumentType.
Version	1..V	Version number associated to the message's content. Ascendant number
ResultStatus	<a href="#">SC.@ResultStatus</a>	Status of the message. Expected statuses are: START_LIST (before any unit is complete) INTERMEDIATE (during the phase) UNCONFIRMED (if last match is unconfirmed) UNOFFICIAL (if last match is unofficial) OFFICIAL (after all matches official)
FeedFlag	"P"-Production "T"-Test	Test message or production message.
Date	Date	Date when the message is generated, expressed in the local time zone where the message was produced.
Time	Time	Time up to milliseconds when the message is generated, expressed in the local time zone where the message was produced.
LogicalDate	Date	Logical Date of events. This is the same as the physical day except when the unit or message transmission extends after midnight. See full explanation in ODF Foundation.
Source	<a href="#">SC.@Source</a>	Code indicating the system which generated the message.

### 2.1.13.3 Trigger and Frequency

The general rule is that this message is sent:

- \* Before the start of the competition to build in the initial tables. The message has status START\_LIST
- \* When an event unit of the corresponding phase finishes (not waiting for official). The message has status INTERMEDIATE.





\* When the phase finishes (there are no more event units/games to compete). The message has status OFFICIAL

The status can be seen in ODF header (ResultStatus attribute).


Trigger also after any change.


However, if there is any kind of sport specific rule, overwrite it in each of the ODF Sport Data Dictionaries.


### 2.1.13.4 Message Structure

The following table defines the structure of the message.

Level 1	Level 2	Level 3	Level 4	Level 5	Level 6	Level 7	Level 8	Level 9	Level 10
<u>Competition (0,1)</u>									
	Gen								
	Sport								
	Codes								
	<u>ExtendedInfos (0,1)</u>								
		<u>ExtendedInfo (0,N)</u>							
			Code						
			Pos						
			Value						
			<u>Extension (0,N)</u>						
				Code					
				Pos					
				Value					
		<u>Progress (0,1)</u>							
			LastUnit						
			UnitsTotal						
			UnitsComplete						
			<u>Extension (0,N)</u>						
				Code					
				Pos					
				Value					
		<u>SportDescription (0,1)</u>							
			DisciplineName						
			EventName						
			SubEventName						
			Gender						
		<u>VenueDescription (0,1)</u>							
			Venue						
			VenueName						
			Location						
			LocationName						
	<u>Result (1,N)</u>								
		Rank							
		RankEqual							

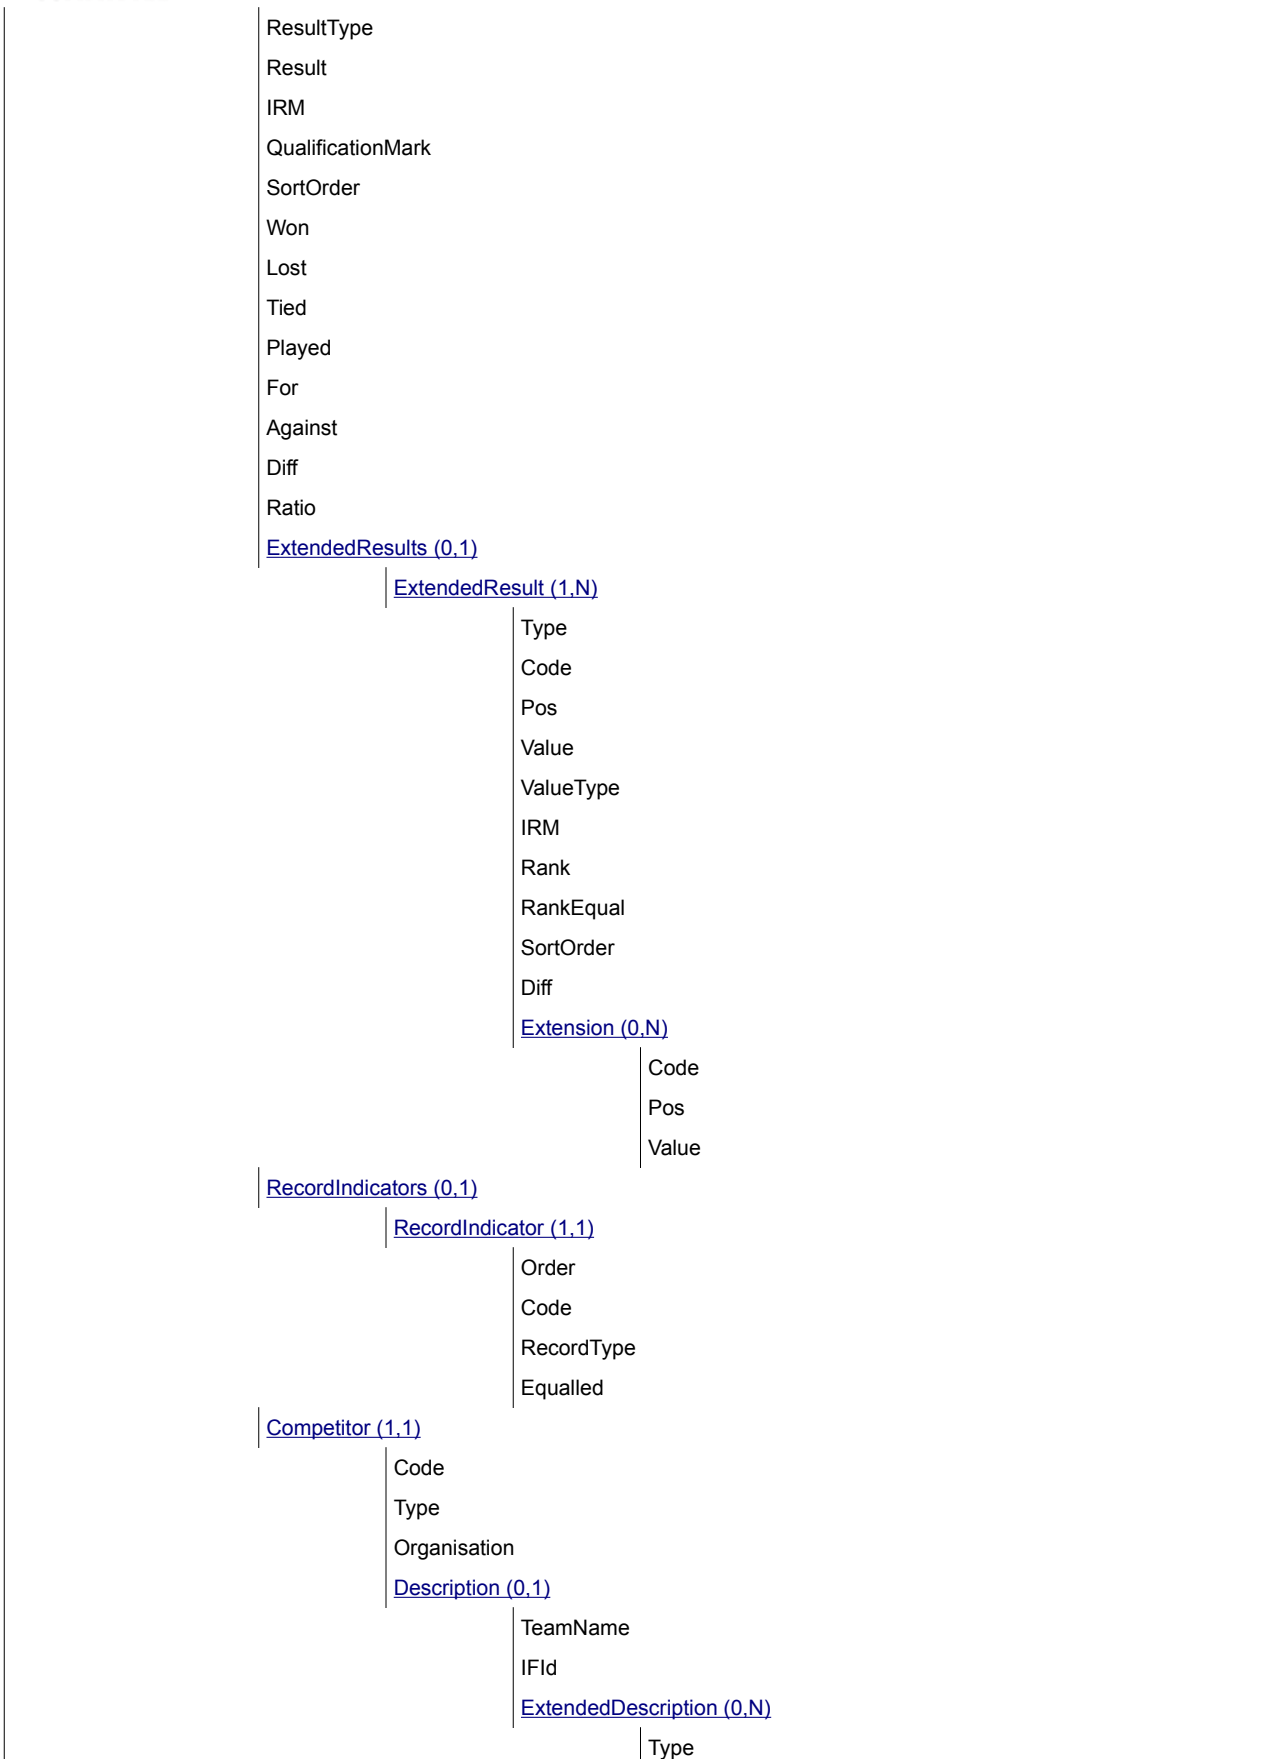

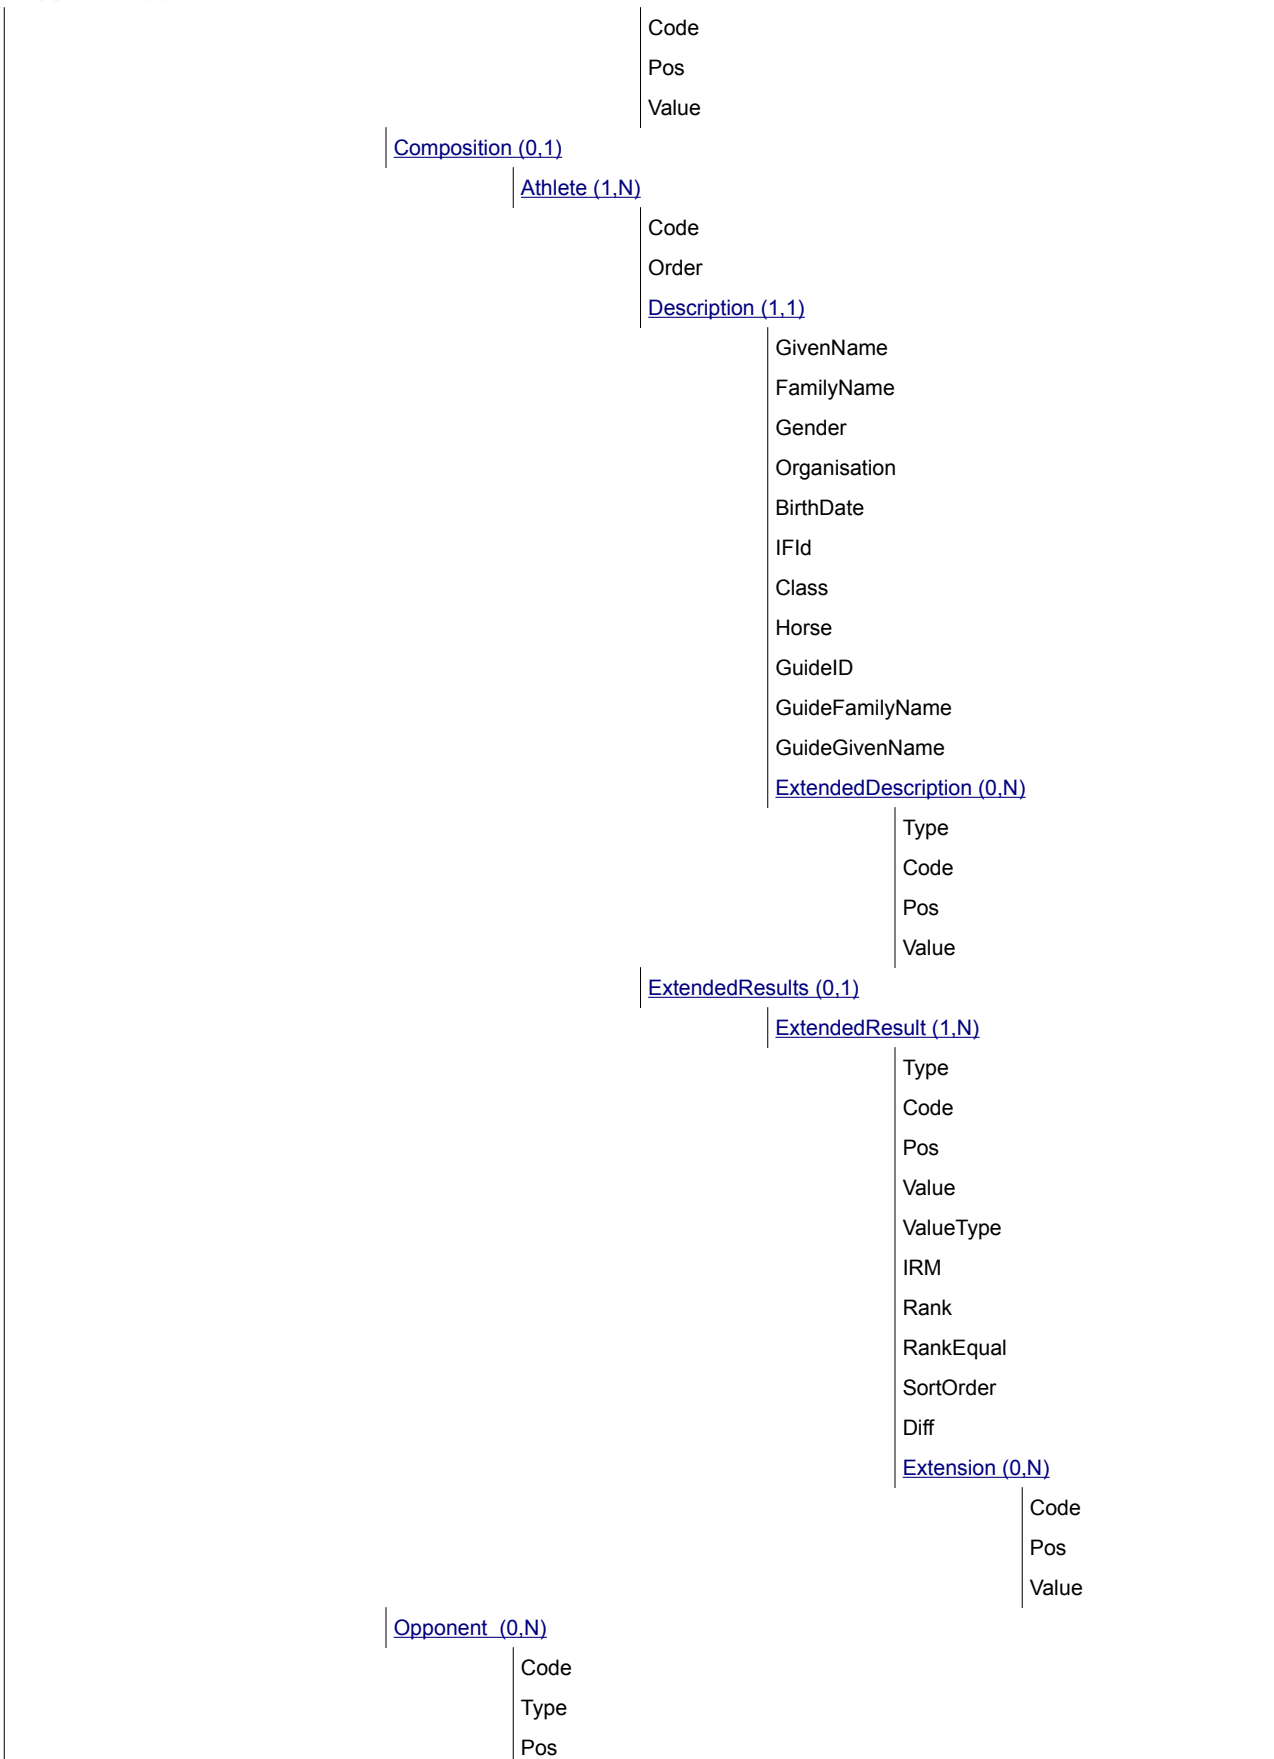

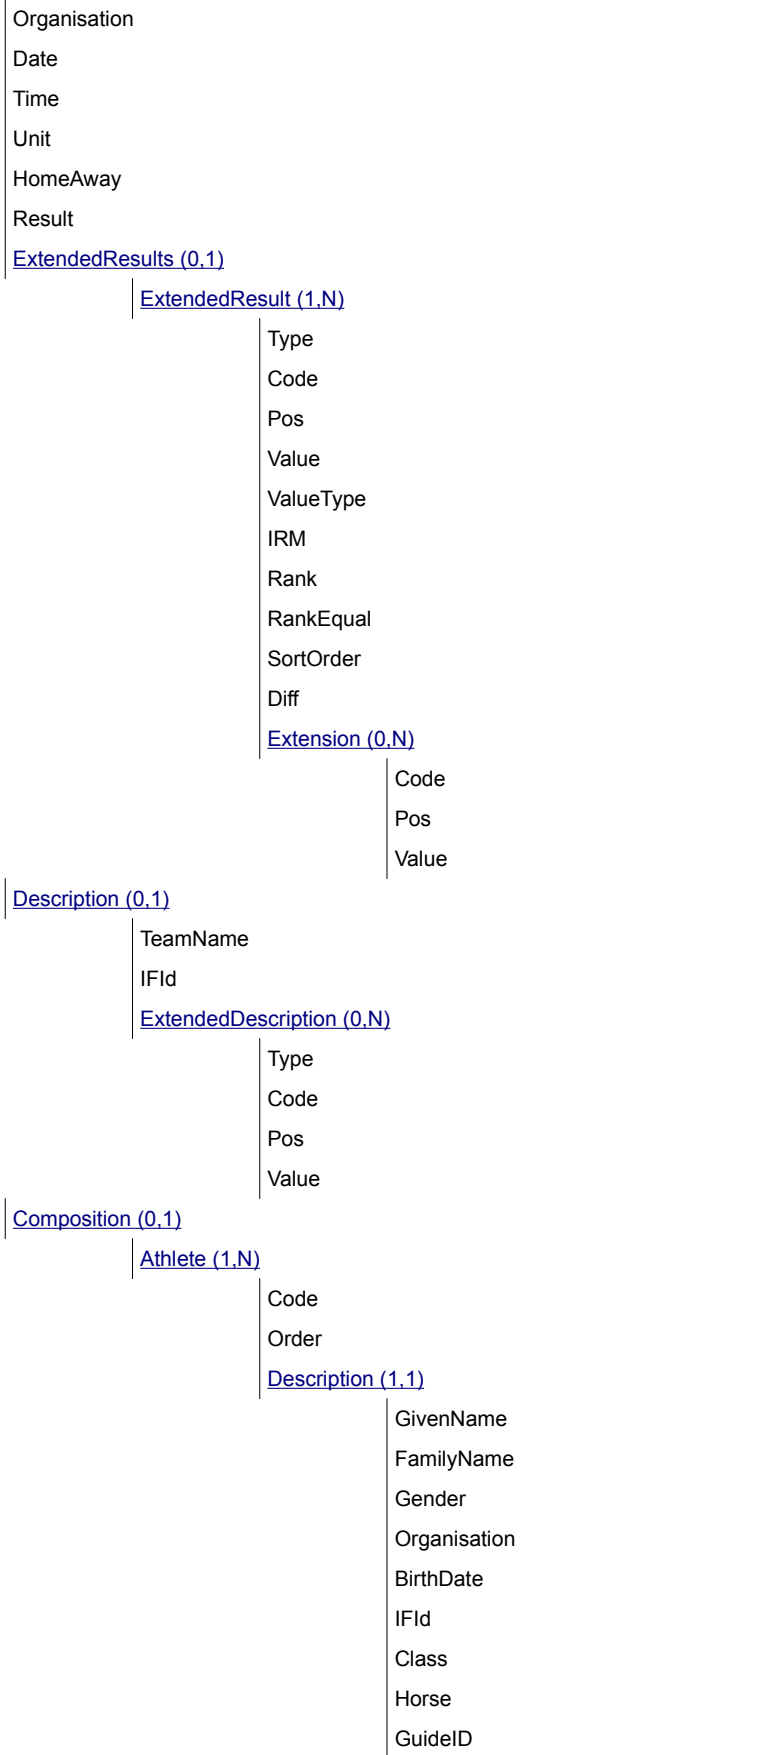

	GuideFamilyName	
	GuideGivenName	
	<a href="#">ExtendedDescription (0,N)</a>	
	Type	
	Code	
	Pos	
	Value	
	<a href="#">ExtendedResults (0,1)</a>	
	<a href="#">ExtendedResult (1,N)</a>	
	Type	
	Code	
	Pos	
	Value	
	ValueType	
	IRM	
	Rank	
	RankEqual	
	SortOrder	
	Diff	
	<a href="#">Extension (0,N)</a>	
		Code
		Pos
		Value

### 2.1.13.5 Message Values

Element Competition (0,1)			
Attribute	M/O	Value	Description
Gen	O	S(20)	Version of the General Data Dictionary applicable to the message
Sport	O	S(20)	Version of the Sport Data Dictionary applicable to the message
Codes	O	S(20)	Version of the Codes applicable to the message

Element ExtendedInfos /ExtendedInfo (0,N)			
Attribute	M/O	Value	Description
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element ExtendedInfos /ExtendedInfo /Extension (0,N)			
Attribute	M/O	Value	Description
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element ExtendedInfos /Progress (0,1)			
Attribute	M/O	Value	Description
LastUnit	O	<a href="#">CC @Unit</a>	Full RSC of the last unit completed (or in progress if applicable) related to the message?s content
UnitsTotal	O	Numeric ##0	Total units expected related data impacting this message.
UnitsComplete	O	Numeric ##0	Total units completed which have related data impacting this message.

Element ExtendedInfos /Progress /Extension (0,N)			
Attribute	M/O	Value	Description
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Table comment: Attribute to be set Mandatory from Optional or redefined. Refer to the ODF Sport Data Dictionary for each of the disciplines

Element ExtendedInfos /SportDescription (0,1)			
Sport Descriptions in Text.			
Attribute	M/O	Value	Description
DisciplineName	M	S(40)	Discipline name (not code) from Common Codes
EventName	M	S(40)	Event name (not code) from Common Codes
SubEventName	O	S(40)	Phase level short name (not code) from Common Codes. Only include if in single phase.
Gender	M	<a href="#">CC @SportGender</a>	Gender code for the event unit

Element ExtendedInfos /VenueDescription (0,1)			
Venue Names in Text. Only included where the phase is contested at a single venue			
Attribute	M/O	Value	Description
Venue	M	<a href="#">CC @VenueCode</a>	Venue Code
VenueName	M	S(25)	Venue Description (not code) from Common Codes
Location	O	<a href="#">CC @Location</a>	Location code
LocationName	O	S(30)	Location Description (not code) from Common Codes

Element Result (1,N)			
For any message, there should be at least one competitor being awarded a result for the pool.			
Attribute	M/O	Value	Description
Rank	O	Text See table comment	Rank of the competitor in the pool.
RankEqual	O	S(1)	Identifies if a rank has been equalled. Send Y if applicable else not sent.
ResultType	O	See table comment	Type of the @Result attribute
Result	O	See table comment	The result of the competitor in the pool, usually the points scored
IRM	O	See table comment	The invalid result mark, in case it is assigned



QualificationMark	O	See table comment	The code which gives an indication on the qualification of the competitor for the next round of the competition
SortOrder	M	Numeric See table comment	Unique sort order for result in the pool, based on rank to break rank ties.
Won	O	Numeric See table comment	Number of matches or games won
Lost	O	Numeric See table comment	Number of matches or games lost
Tied	O	Numeric See table comment	Number of matches or games tied
Played	O	Numeric See table comment	Number of matches or games played by the competitor
For	O	Numeric See table comment	Points/Goals achieved by the competitor
Against	O	Numeric See table comment	Points/Goals against the competitor
Diff	O	See table comment	Difference between For and Against, see sports documents for more information.
Ratio	O	See table comment	Ratio value, see sports documents for more information

Table comment: Attribute to be set Mandatory from Optional or redefined. Refer to the ODF Sport Data Dictionary for each of the disciplines

Element Result /ExtendedResults /ExtendedResult (1,N)			
Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	
ValueType	O	See sport specific definition	ValueType should be used to describe the type of data @Value
IRM	O	See sport specific definition	Send appropriate IRM code if IRM at this ExtendedResult
Rank	O	See sport specific definition	Rank of the competitor for this specific ExtendedResult.
RankEqual	O	S(1)	Send Y where Rank at this specific ExtendedResult is equalled else not sent.
SortOrder	O	See sport specific definition	Similar to rank but considering all competitors (those with IRM or no rank at this ExtendedResult)
Diff	O	See sport specific definition	Time/Points etc behind leader at this ExtendedResult

Element Result /ExtendedResults /ExtendedResult /Extension (0,N)			
Attribute	M/O	Value	Description
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

**Element Result /RecordIndicators /RecordIndicator (1,1)**



Result's record indicator.			
Attribute	M/O	Value	Description
Order	M	Numeric	The hierarchy (priority) for types of record from 1 to n. Can use the Order column from CC @RecordType for reference).
Code	M	<a href="#">CC @RecordCode</a>	Code which describes the record broken by the result value.
RecordType	M	<a href="#">CC @RecordType</a>	Code which specifies the level at which the record is broken.
Equalled	O	S(1)	Send Y in the case that the record has been equalled else do not send.

Element Result /Competitor (1,1)			
Attribute	M/O	Value	Description
Code	M	S(20) with no leading zeroes	Competitor's ID
Type	M	S(1)	A for athlete, T for team
Organisation	M	<a href="#">CC @Organisation</a>	Competitor's organisation

Element Result /Competitor /Description (0,1)			
Competitors extended information.			
Attribute	M/O	Value	Description
TeamName	M	S(73)	Name of the team. Only applies for teams / groups.
IFId	O	S(16)	Team IF number, send if available

Element Result /Competitor /Description /ExtendedDescription (0,N)			
Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element Result /Competitor /Composition /Athlete (1,N)			
Attribute	M/O	Value	Description
Code	M	S(20) with no leading zeroes	Athlete's ID, corresponding to either a team member or an individual athlete
Order	M	Numeric	Order attribute used to sort team members in a team (if Competitor @Type="T") or 1 if Competitor @Type="A".

Table comment: Attribute to be set Mandatory from Optional or redefined. Refer to the ODF Sport Data Dictionary for each of the disciplines

Element Result /Competitor /Composition /Athlete /Description (1,1)			
Attribute	M/O	Value	Description
GivenName	O	S(25)	Given name in WNPA format (mixed case)
FamilyName	M	S(25)	Family name in WNPA format (mixed case)
Gender	M	<a href="#">CC @PersonGender</a>	Gender of the athlete
Organisation	M	<a href="#">CC @Organisation</a>	Athletes' organisation
BirthDate	O	Date	Birth date (example: YYYY-MM-DD). Must include if the data is available





IFId	O	S(16)	International Federation ID
Class	O	CC @DisplineClass	Code to identify the sport class in the case of events with athletes with a disability (e.g: Paralympic Games).  This attribute is optional because it is not used in events without such athletes.
Horse	O	S(25)	Name of the athlete's horse
GuideID	O	S(20) without leading zeros	ID of the Guide, used for some athletes with a disability (e.g: Paralympic Games).
GuideFamilyName	O	S(25)	Family Name of the athlete's guide (mixed case).  Used for some athletes with a disability (e.g: Paralympic Games).
GuideGivenName	O	S(25)	Given Name of the athlete's guide (mixed case).  Used for some athletes with a disability (e.g: Paralympic Games).

**Element Result /Competitor /Composition /Athlete /Description /ExtendedDescription (0,N)**

Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

**Element Result /Competitor /Composition /Athlete /ExtendedResults /ExtendedResult (1,N)**

Team member's or individual athlete's extended result, depending on whether Competitor @Type="T" or Competitor @Type="A".

Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	
ValueType	O	See sport specific definition	ValueType should be used to describe the type of data @Value
IRM	O	See sport specific definition	Send appropriate IRM code if IRM at this ExtendedResult
Rank	O	See sport specific definition	Rank of the competitor for this specific ExtendedResult.
RankEqual	O	S(1)	Send Y where Rank at this specific ExtendedResult is equalled else not sent.
SortOrder	O	See sport specific definition	Similar to rank but considering all competitors (those with IRM or no rank at this ExtendedResult
Diff	O	See sport specific definition	Time/Points etc behind leader at this ExtendedResult

**Element Result /Competitor /Composition /Athlete /ExtendedResults /ExtendedResult /Extension (0,N)**

Extensions of team member's or individual athlete's extended results.

Attribute	M/O	Value	Description
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	



**Element Result /Competitor /Opponent (0,N)**

Details of the opposing competitor in competitions within the pool. (The Opponent of the competitor in the Opponent @Pos column of the Pool)

Attribute	M/O	Value	Description
Code	M	S(20) with no leading zeroes	Competitor ID or TBD if unknown
Type	M	S(1)	A for athlete, T for team
Pos	M	Numeric	1 to n. Normally expected to be the same as SortOrder for the same competitor.
Organisation	M	<a href="#">CC @Organisation</a>	Competitor's organisation (code). Must include if the data is available
Date	M	Date	Date of match between the competitor and opponent (example: YYYY-MM-DD). Must include if the data is available, send even after the match is complete.
Time	O	S(5)	Time of match (example HH:MM) Must include if the data is available, send even after the match is complete.
Unit	O	<a href="#">CC @Unit</a>	Full RSC of the Unit for the Pool Item
HomeAway	O	S(1)	Home / Away indicator. Send H if the opponent is the home team, send A if the opponent is the away team.
Result	O	S(50)	Result of the match if match is complete and formatted as in ORIS (separator & order, example 5-2). Must include if the data is available and the match is complete. The order of the result data is relative to the competitor and may be reversed for other competitor or depending on home/away display rules.

Table comment: Attribute to be set Mandatory from Optional or redefined. Refer to the ODF Sport Data Dictionary for each of the disciplines

**Element Result /Competitor /Opponent /ExtendedResults /ExtendedResult (1,N)**

Extensions of oppositions extended results.

Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	
ValueType	O	See sport specific definition	ValueType should be used to describe the type of data @Value
IRM	O	See sport specific definition	Send appropriate IRM code if IRM at this ExtendedResult
Rank	O	See sport specific definition	Rank of the competitor for this specific ExtendedResult.
RankEqual	O	S(1)	Send Y where Rank at this specific ExtendedResult is equalled else not sent.
SortOrder	O	See sport specific definition	Similar to rank but considering all competitors (those with IRM or no rank at this ExtendedResult)
Diff	O	See sport specific definition	Time/Points etc behind leader at this ExtendedResult

**Element Result /Competitor /Opponent /ExtendedResults /ExtendedResult /Extension (0,N)**

Attribute	M/O	Value	Description
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

**Element Result /Competitor /Opponent /Description (0,1)**



Competitors extended information.			
Attribute	M/O	Value	Description
TeamName	M	S(73)	Name of the opposition team. Only applies for teams / groups.
IFId	O	S(16)	Team IF number, send if available

Element Result /Competitor /Opponent /Description /ExtendedDescription (0,N)			
Extensions of oppositions extended results.			
Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element Result /Competitor /Opponent /Composition /Athlete (1,N)			
Attribute	M/O	Value	Description
Code	M	S(20) with no leading zeroes	Athletes ID, corresponding to either a team member or an individual athlete
Order	M	Numeric	Order attribute used to sort team members in a team (if Competitor @Type="T") or 1 if Competitor @Type="A".

Table comment: Attribute to be set Mandatory from Optional or redefined. Refer to the ODF Sport Data Dictionary for each of the disciplines

Element Result /Competitor /Opponent /Composition /Athlete /Description (1,1)			
Attribute	M/O	Value	Description
GivenName	O	S(25)	Given name in WNPA format (mixed case)
FamilyName	M	S(25)	Family name in WNPA format (mixed case)
Gender	M	<a href="#">CC @PersonGender</a>	Gender of the athlete
Organisation	M	<a href="#">CC @Organisation</a>	Athletes' organisation
BirthDate	O	Date	Birth date (example: YYYY-MM-DD). Must include if the data is available
IFId	O	S(16)	International Federation ID
Class	O	CC @DisplineClass	Code to identify the sport class in the case of events with athletes with a disability (e.g: Paralympic Games).  This attribute is optional because it is not used in events without such athletes.
Horse	O	S(25)	Name of the athlete's horse
GuideID	O	S(20) without leading zeros	ID of the Guide, used for some athletes with a disability (e.g: Paralympic Games).
GuideFamilyName	O	S(25)	Family Name of the athlete's guide (mixed case).  Used for some athletes with a disability (e.g: Paralympic Games).
GuideGivenName	O	S(25)	Given Name of the athlete's guide (mixed case).  Used for some athletes with a disability (e.g: Paralympic Games).

Element Result /Competitor /Opponent /Composition /Athlete /Description /ExtendedDescription (0,N)			
--	--	--	--



Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

**Element Result /Competitor /Opponent /Composition /Athlete /ExtendedResults /ExtendedResult (1,N)**

Team member's or individual athlete's extended result, depending on whether Competitor @Type="T" or Competitor @Type="A".

Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	
ValueType	O	See sport specific definition	ValueType should be used to describe the type of data @Value
IRM	O	See sport specific definition	Send appropriate IRM code if IRM at this ExtendedResult
Rank	O	See sport specific definition	Rank of the competitor for this specific ExtendedResult.
RankEqual	O	S(1)	Send Y where Rank at this specific ExtendedResult is equalled else not sent.
SortOrder	O	See sport specific definition	Similar to rank but considering all competitors (those with IRM or no rank at this ExtendedResult
Diff	O	See sport specific definition	Time/Points etc behind leader at this ExtendedResult

**Element Result /Competitor /Opponent /Composition /Athlete /ExtendedResults /ExtendedResult /Extension (0,N)**

Extensions of team member's or individual athlete's extended results.

Attribute	M/O	Value	Description
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

### 2.1.13.6 Message Sort

The attribute used to sort the results is Result @SortOrder.

## 2.1.14 Brackets

### 2.1.14.1 Description

The Brackets message contains the brackets information for an event or component of an event (phase or unit). It is used where there is a necessity to know the progress of a competition. In the early stages of the competition, it indicates how the competition progress will proceed from the winners/losers.

### 2.1.14.2 Header Values

The following table describes the message header attributes.

Attribute	Value	Comment
CompetitionCode	<a href="#">CC @Competition</a>	Unique ID for competition
DocumentCode	<a href="#">CC @Event</a>	Full RSC of the Event
DocumentType	DT_BRACKETS	Brackets message
Version	1..V	Version number associated to the message's content. Ascendant number
ResultStatus	<a href="#">SC @ResultStatus</a>	Status of the message. Expected statuses are: START_LIST (before any unit is complete) INTERMEDIATE (during the competition) UNCONFIRMED (when last match unconfirmed) UNOFFICIAL (when last match unofficial) OFFICIAL (when all matches official)
FeedFlag	"P"-Production "T"-Test	Test message or production message.
Date	Date	Date when the message is generated, expressed in the local time zone where the message was produced.
Time	Time	Time up to milliseconds when the message is generated, expressed in the local time zone where the message was produced.
LogicalDate	Date	Logical Date of events. This is the same as the physical day except when the unit or message transmission extends after midnight. See full explanation in ODF Foundation.
Source	<a href="#">SC @Source</a>	Code indicating the system which generated the message.

### 2.1.14.3 Trigger and Frequency

This message should be sent at the very beginning of a competition, as soon as brackets are available.

Send when a match/event unit is completed, including Unconfirmed, Unofficial and Official status. Therefore it is triggered up to three times (with both status) for each event unit (if unofficial is used). The message should be updated including information on each competitor in the different bracket items.

The @ResultStatus attribute will vary depending on the competition status.

- \* Send with ResultStatus = "START\_LIST" if no units are complete
- \* Send with ResultStatus = "INTERMEDIATE" until the last event unit (Gold Medal Match) is Unofficial (i.e. for all event units up until the Gold Medal match is completed for an event)
- \* Send with ResultStatus = "UNCONFIRMED" when the last event unit for an event (Gold Medal match) has Unconfirmed status.
- \* Send with ResultStatus = "UNOFFICIAL" when the last event unit for an event (Gold Medal match) has Unofficial status.
- \* Send with ResultStatus = "OFFICIAL" when the last event unit for an event (Gold Medal match) has Official status.



Trigger also after any change.


### 2.1.14.4 Message Structure

The following table defines the structure of the message.

Level 1	Level 2	Level 3	Level 4	Level 5	Level 6	Level 7	Level 8	Level 9	Level 10	Level 11
<a href="#">Competition (0.1)</a>										
	Gen									
	Sport									
	Codes									
	<a href="#">ExtendedInfos (0.1)</a>									
		<a href="#">ExtendedInfo (0.N)</a>								
			Type							
			Code							
			Pos							
			Value							
			<a href="#">Extension (0.N)</a>							
				Code						
				Pos						
				Value						
			<a href="#">Progress (0.1)</a>							
			LastUnit							
			UnitsTotal							
			UnitsComplete							
			<a href="#">Extension (0.N)</a>							
				Code						
				Pos						
				Value						
			<a href="#">SportDescription (0.1)</a>							
			DisciplineName							
			EventName							
			Gender							
			<a href="#">VenueDescription (0.1)</a>							
			Venue							
			VenueName							
			Location							
			LocationName							
	<a href="#">Bracket (1.N)</a>									
		Code								
		<a href="#">BracketItems (1.N)</a>								
			Code							
			<a href="#">BracketItem (1.N)</a>							
				Code						
				Order						
				Position						



Date
Time
Unit
Result
<a href="#">ExtBracketItems (0.1)</a>
<a href="#">ExtBracketItem (1.N)</a>
Type
Code
Pos
Value
<a href="#">CompetitorPlace (1.N)</a>
Pos
Code
WLT
Rank
Result
Diff
IRM
QualificationMark
StrikeOut
StartOrder
<a href="#">ExtCompPlaces (0.1)</a>
<a href="#">ExtCompPlace (1.N)</a>
Type
Code
Pos
Value
<a href="#">PreviousUnit (0.1)</a>
Unit
Value
WLT
<a href="#">Competitor (0.1)</a>
Code
Type
Seed
Organisation
Bib
<a href="#">Description (0.1)</a>
TeamName
IFId
<a href="#">ExtendedDescription (0.N)</a>
Type
Code
Pos

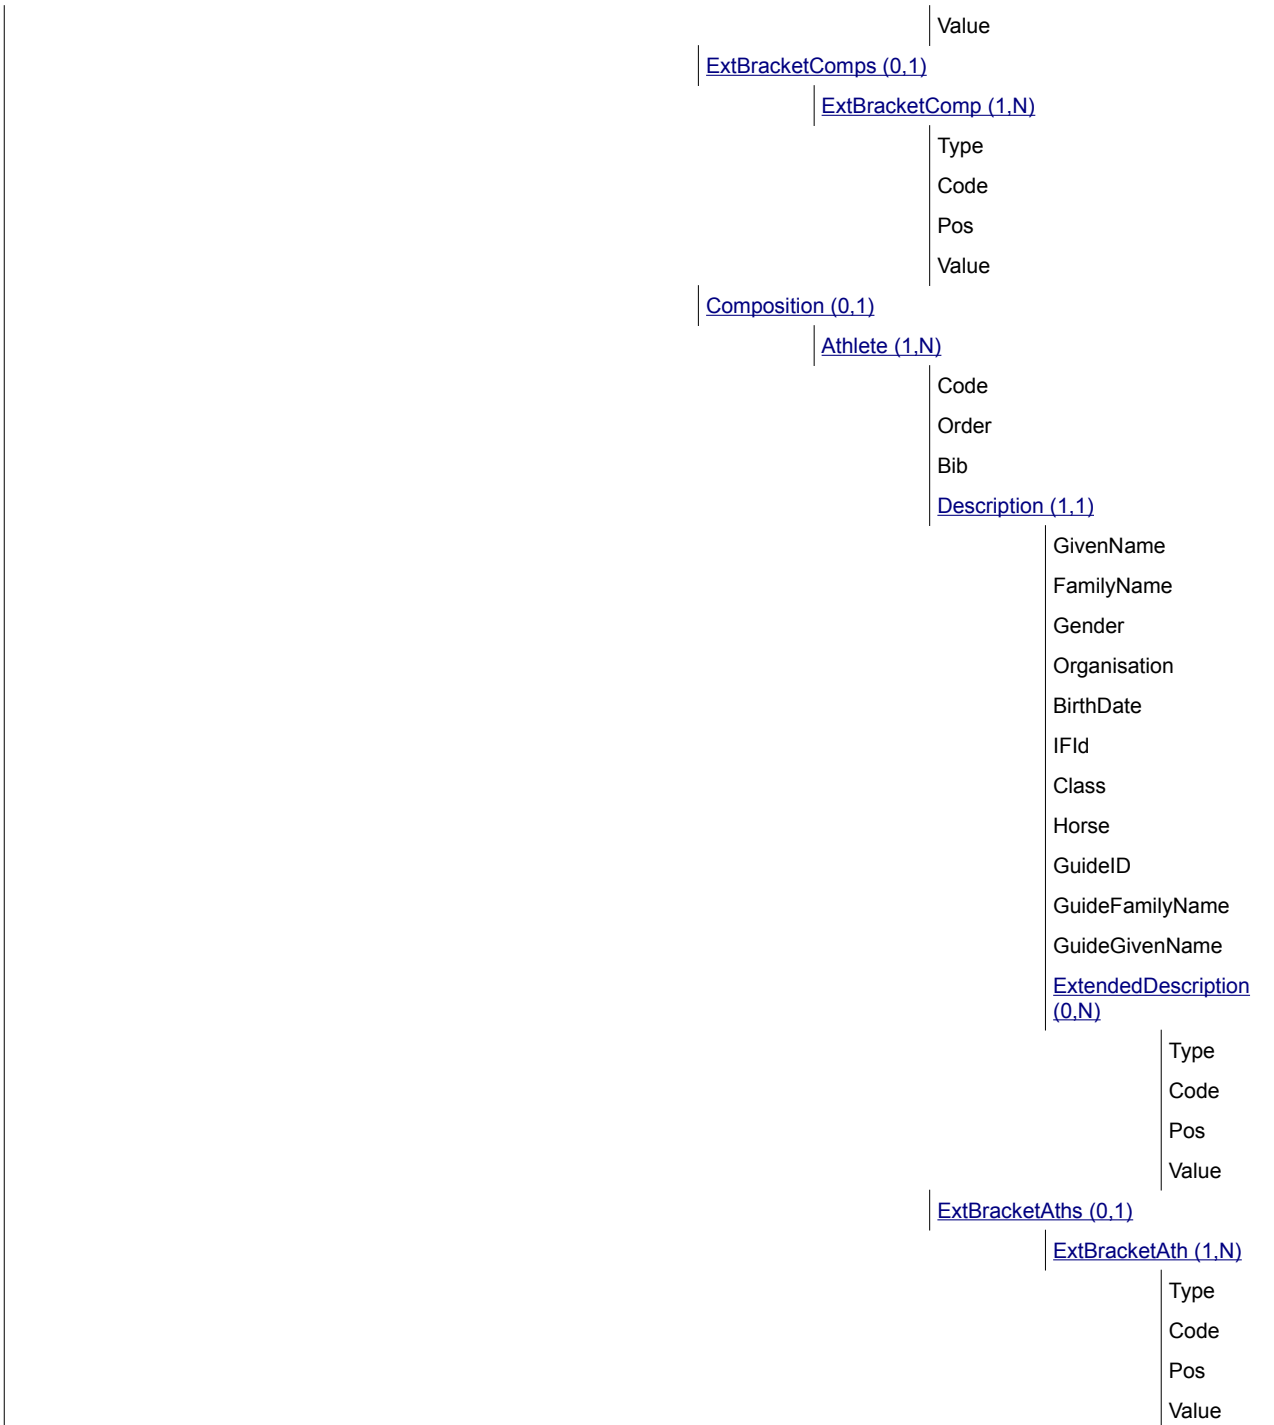

### 2.1.14.5 Message Values

Element Competition (0,1)			
Attribute	M/O	Value	Description
Gen	O	S(20)	Version of the General Data Dictionary applicable to the message
Sport	O	S(20)	Version of the Sport Data Dictionary applicable to the message
Codes	O	S(20)	Version of the Codes applicable to the message



Element ExtendedInfos /ExtendedInfo (0,N)			
Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element ExtendedInfos /ExtendedInfo /Extension (0,N)			
Attribute	M/O	Value	Description
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element ExtendedInfos /Progress (0,1)			
Attribute	M/O	Value	Description
LastUnit	O	<a href="#">CC @Unit</a>	Full RSC of the last unit completed (or in progress if applicable) related to the message's content
UnitsTotal	O	Numeric ##0	Total units expected related data impacting this message.
UnitsComplete	O	Numeric ##0	Total units completed which have related data impacting this message.

Element ExtendedInfos /Progress /Extension (0,N)			
Attribute	M/O	Value	Description
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Table comment: Attribute to be set Mandatory from Optional or redefined. Refer to the ODF Sport Data Dictionary for each of the disciplines

Element ExtendedInfos /SportDescription (0,1)			
Sport Description in Text			
Attribute	M/O	Value	Description
DisciplineName	M	S(40)	Discipline name (not code) from Common Codes
EventName	M	S(40)	Event name (not code) from Common Codes.
Gender	M	CC @SportGender	Gender code for the event unit

Element ExtendedInfos /VenueDescription (0,1)			
Venue Names in text.			
Attribute	M/O	Value	Description
Venue	M	<a href="#">CC @VenueCode</a>	Venue code
VenueName	M	S(25)	Venue Description (not code) from Common Codes
Location	O	<a href="#">CC @Location</a>	Location Code
LocationName	O	S(30)	Location Description (not code) from Common Codes

Element Bracket (1,N)			
Attribute	M/O	Value	Description
Code	M	See table comment	Bracket code to identify a bracket item (finals, classification games...). There should be a different code for each bracket based on sport/ORIS presentation of the bracket. For example bronze bracket is a different code from that leading to gold (assuming there are matches played)

Table comment: Attribute to be set Mandatory from Optional or redefined. Refer to the ODF Sport Data Dictionary for each of the disciplines

Element Bracket /BracketItems (1,N)			
Attribute	M/O	Value	Description
Code	M	See table comment	Bracket code to identify a set of bracket items. It usually refers to the round in the brackets, for example quarterfinal or semifinal etc.

Table comment: Attribute to be set Mandatory from Optional or redefined. Refer to the ODF Sport Data Dictionary for each of the disciplines

Element Bracket /BracketItems /BracketItem (1,N)			
Attribute	M/O	Value	Description
Code	O	See table comment	Bracket code to identify a bracket item. Unique identifier for the BracketItem.
Order	M	Numeric ##0	Sequential number inside of BracketItems to indicate the order, always start at 1
Position	M	Numeric ##0	Bracket position when drawing the bracket. For example a quarter final has 4 items, with positions 1, 2, 3 and 4 from the top. Use the appropriate number to draw the position.
Date	O	Date	Date of match (example: YYYY-MM-DD). Must include if the data is available
Time	O	S(5)	Time of match (example HH:MM). Include if the data is available, however in disciplines where match times are determined depending on the participating competitors then the time is withheld until after competitors are known and the times are approved.
Unit	O	<a href="#">CC @Unit</a>	Full RSC of the unit for the BracketItem
Result	O	S(50)	Result of the match if the match is complete and formatted as in ORIS (separator & order, example 5-2). Must include if the data is available and the match is complete

Table comment: Attribute to be set Mandatory from Optional or redefined. Refer to the ODF Sport Data Dictionary for each of the disciplines

Element Bracket /BracketItems /BracketItem /ExtBracketItems /ExtBracketItem (1,N)			
ExtBracketItems /ExtBracketItem are optional elements according to competitors' rules.			
Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element Bracket /BracketItems /BracketItem /CompetitorPlace (1,N)			
---	--	--	--



**- If the competitors are known, this element is used to place the competitors in the bracket.**  
**- If they are not yet known, it contains some information (on the rule to access to this bracket...)**

Attribute	M/O	Value	Description
Pos	M	Numeric ##0	This attribute is a sequential number to place the different competitors in the bracket (1, 2 ...).
Code	O	See table comment	Code for the first competitor of the BracketItem, usually to indicate the rule to access to the bracket item and appearing as first competitor.
WLT	O	See table comment	W or L, indicates the winner or loser of the bracket item. Always send when known
Rank	O	See table comment	Rank in the bracket item, usually only applicable if more than 2 competitors in the bracket
Result	O	See table comment	The result of the competitor in the event unit
Diff	O	See table comment	Difference from the leader if applicable
IRM	O	See table comment	The invalid result mark, if applicable
QualificationMark	O	See table comment	Indicates the qualification of the competitor for the next round of the competition
StrikeOut	O	See table comment	The competitor should be struck out in the bracket item, usually only used for DQB but may have others uses by sport
StartOrder	O	See table comment	If there is a designator of the starting position, for example colour.

Table comment: Attribute to be set Mandatory from Optional or redefined. Refer to the ODF Sport Data Dictionary for each of the disciplines

**Element Bracket /BracketItems /BracketItem /CompetitorPlace /ExtCompPlaces /ExtCompPlace (1,N)**

Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

**Element Bracket /BracketItems /BracketItem /CompetitorPlace /PreviousUnit (0,1)**  
**Previous event unit related to the CompetitorPlace@Pos competitor of the current bracket item. It is always informed except for the bracket items whose CompetitorPlace@Pos competitor do not have preceding event units in the bracket graph unless coming from a pool.**

Attribute	M/O	Value	Description
Unit	O	<a href="#">CC @Unit</a>	Full RSC code of the previous event unit for the CompetitorPlace@Pos competitor of the bracket item. Must send if a winner/loser from a single unit. If from a pool then this is the RSC of the pool.
Value	O	SC@Pool or S(6)	If the competitor in the current unit is unknown due to coming from a pool or previous matches then fill this field with the pool code or the match number as appropriate. (may be redefined by sport)
WLT	O	S(1)	If the competitor in the current unit is unknown and coming from an earlier bracketitem then fill this field with the W or L indication winner or loser of the previous unit if the information is known. Do not send if competitor comes from a pool.

**Element Bracket /BracketItems /BracketItem /CompetitorPlace /Competitor (0,1)**  
**CompetitorPlace @Pos competitor related to the bracket item. Only include if the competitor is known.**

Attribute	M/O	Value	Description
Code	M	S(20) with no leading zeroes	Competitor's ID
Type	M	S(1)	A for athlete, T for team
Seed	O	S(10)	The seed of the competitor or equivalent information
Organisation	O	<a href="#">CC @Organisation</a>	Competitors' organisation if known.
Bib	O	Defined by Discipline	Competitor Bib

Element Bracket /BracketItems /BracketItem /CompetitorPlace /Competitor /Description (0,1)			
Attribute	M/O	Value	Description
TeamName	M	S(73)	Name of the team. Only applies for teams / groups.
IFld	O	S(16)	Team IF number, send if available

Element Bracket /BracketItems /BracketItem /CompetitorPlace /Competitor /Description /ExtendedDescription (0,N)			
Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element Bracket /BracketItems /BracketItem /CompetitorPlace /Competitor /ExtBracketComps /ExtBracketComp (1,N)			
CompetitorPlace @Pos team competitor's extended bracket information, according to competitors' rules.			
Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element Bracket /BracketItems /BracketItem /CompetitorPlace /Competitor /Composition /Athlete (1,N)			
Attribute	M/O	Value	Description
Code	M	S(20) with no leading zeroes	Athlete's ID, corresponding to either a team member or an individual athlete
Order	M	Numeric See table comment	Order attribute used to sort team members in a team (if Competitor @Type="T") or 1 if Competitor @Type="A".
Bib	O	Defined by Discipline	Athlete Bib

Table comment: Attribute to be set Mandatory from Optional or redefined. Refer to the ODF Sport Data Dictionary for each of the disciplines

Element Bracket /BracketItems /BracketItem /CompetitorPlace /Competitor /Composition /Athlete /Description (1,1)			
Attribute	M/O	Value	Description
GivenName	O	S(25)	Given name in WNPA format (mixed case)
FamilyName	M	S(25)	Family name in WNPA format (mixed case)
Gender	M	<a href="#">CC @PersonGender</a>	Gender of the athlete
Organisation	M	<a href="#">CC @Organisation</a>	Athletes' organisation
BirthDate	O	Date	Birth date (example: YYYY-MM-DD). Must include if the data is available



IFId	O	S(16)	International Federation ID
Class	O	CC @DisplineClass	Code to identify the sport class in the case of events with athletes with a disability (e.g: Paralympic Games). This attribute is optional because it is not used in events without such athletes.
Horse	O	S(25)	Name of the athlete's horse
GuideID	O	S(20) without leading zeros	ID of the Guide, used for some athletes with a disability (e.g: Paralympic Games).
GuideFamilyName	O	S(25)	Family Name of the athlete's guide (mixed case).
GuideGivenName	O	S(25)	Given Name of the athlete's guide (mixed case).

Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

### 2.1.14.6 Message Sort

The following order applies:

- \* Every ODF Sport Data Dictionary making use of this message should specify the order for Bracket @Code if more than one "@Code" is possible.
- \* Every ODF Sport Data Dictionary should specify the order for BracketItems according to its @Code attribute. It will usually be referred to BracketItems /BracketItem /Unit (all BracketItem should be grouped by the BracketItem /Unit attribute).
- \* Then, the BracketItem /Unit are sorted according to their scheduled start time.

## 2.1.15 Statistics

### 2.1.15.1 Description

The Statistics message contains a list of statistics for a competitor (could be an individual athlete or a team), that applies at a DocumentCode level, which could be for an event unit, a phase or an event.

There will be a separate message (identified by the header's DocumentSubtype and DocumentSubcode) for every table where multiple statistics apply.

### 2.1.15.2 Header Values

The following table describes the message header attributes.

Attribute	Value	Comment
CompetitionCode	<a href="#">CC @Competition</a>	Unique ID for competition
DocumentCode	Full RSC	Depending on the statistics it could be at any level
DocumentSubcode	To be defined in each ODF Data Dictionary	Extension for the DocumentCode. This is an optional attribute. It is used when the RSC is not enough and it is required several different messages with the same RSC. Each ODF Sport Data Dictionary will have to complete the explanation regarding to this attribute (it can be useful for example to separate statistics by Organisation).
DocumentType	DT_STATS	Statistics message
DocumentSubtype	S(20) To be defined in each ODF Data Dictionary	Attribute used to extend DocumentType for some messages.
Version	1..V	Version number associated to the message's content. Ascendant number
ResultStatus	<a href="#">SC @ResultStatus</a>	It indicates whether the result is official or intermediate etc). LIVE (used during the competition when nothing else applies) INTERMEDIATE (used after the competition has started and is not finished but not currently live, typically between units) OFFICIAL (after the last unit which effects the statistics is official)
FeedFlag	"P"-Production "T"-Test	Test message or production message.
Date	Date	Date when the message is generated, expressed in the local time zone where the message was produced.
Time	Time	Time up to milliseconds when the message is generated, expressed in the local time zone where the message was produced.
LogicalDate	Date	Logical Date of events. This is the same as the physical day except when the unit or message transmission extends after midnight. See full explanation in ODF Foundation.
Source	<a href="#">SC @Source</a>	Code indicating the system which generated the message.


### 2.1.15.3 Trigger and Frequency


Each ODF Sport Data Dictionary should specify when to make use of this message, if necessary though the general rule is trigger as soon as each unit is finished (UNCONFIRMED) and on each change in the statistics.

### 2.1.15.4 Message Structure


The following table defines the structure of the message.

Level 1	Level 2	Level 3	Level 4	Level 5	Level 6	Level 7	Level 8	Level 9
---------	---------	---------	---------	---------	---------	---------	---------	---------

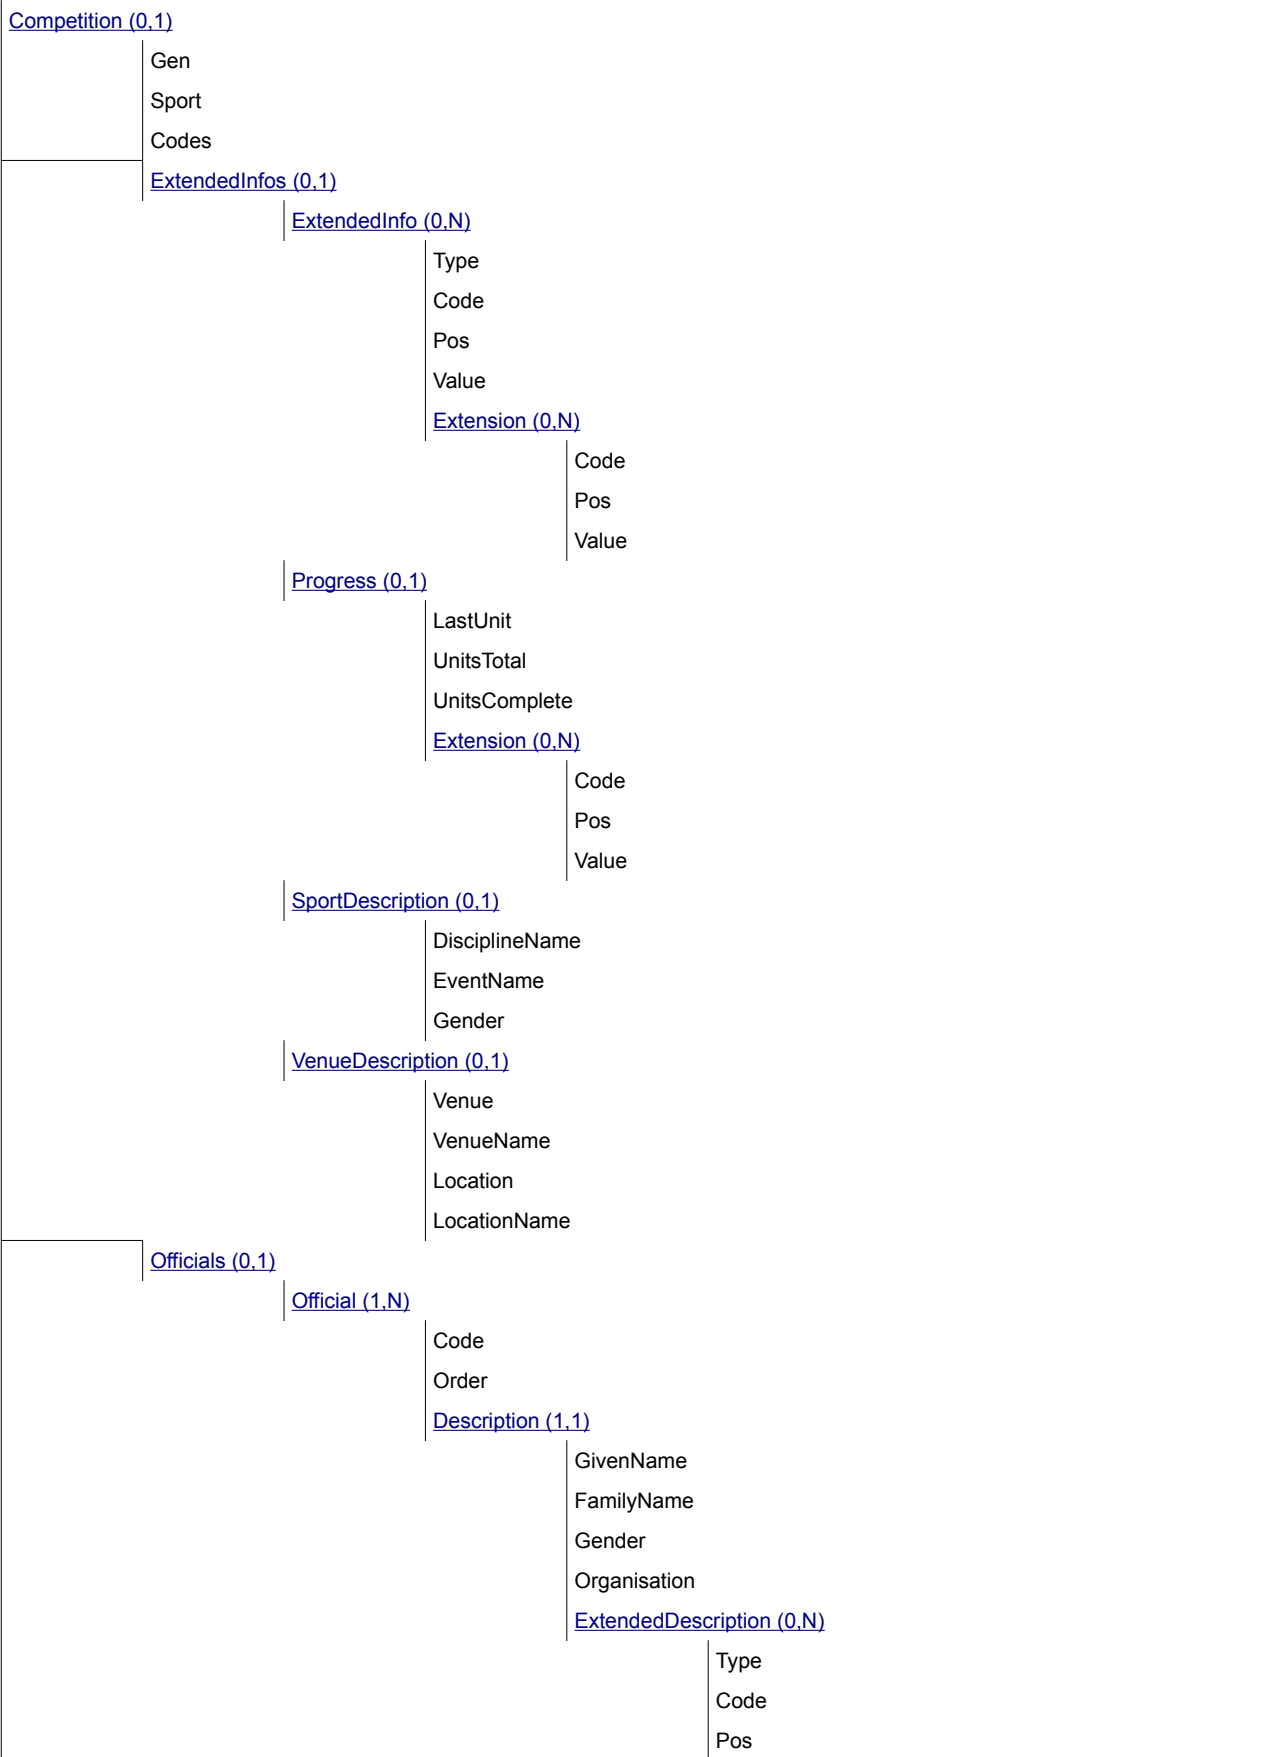

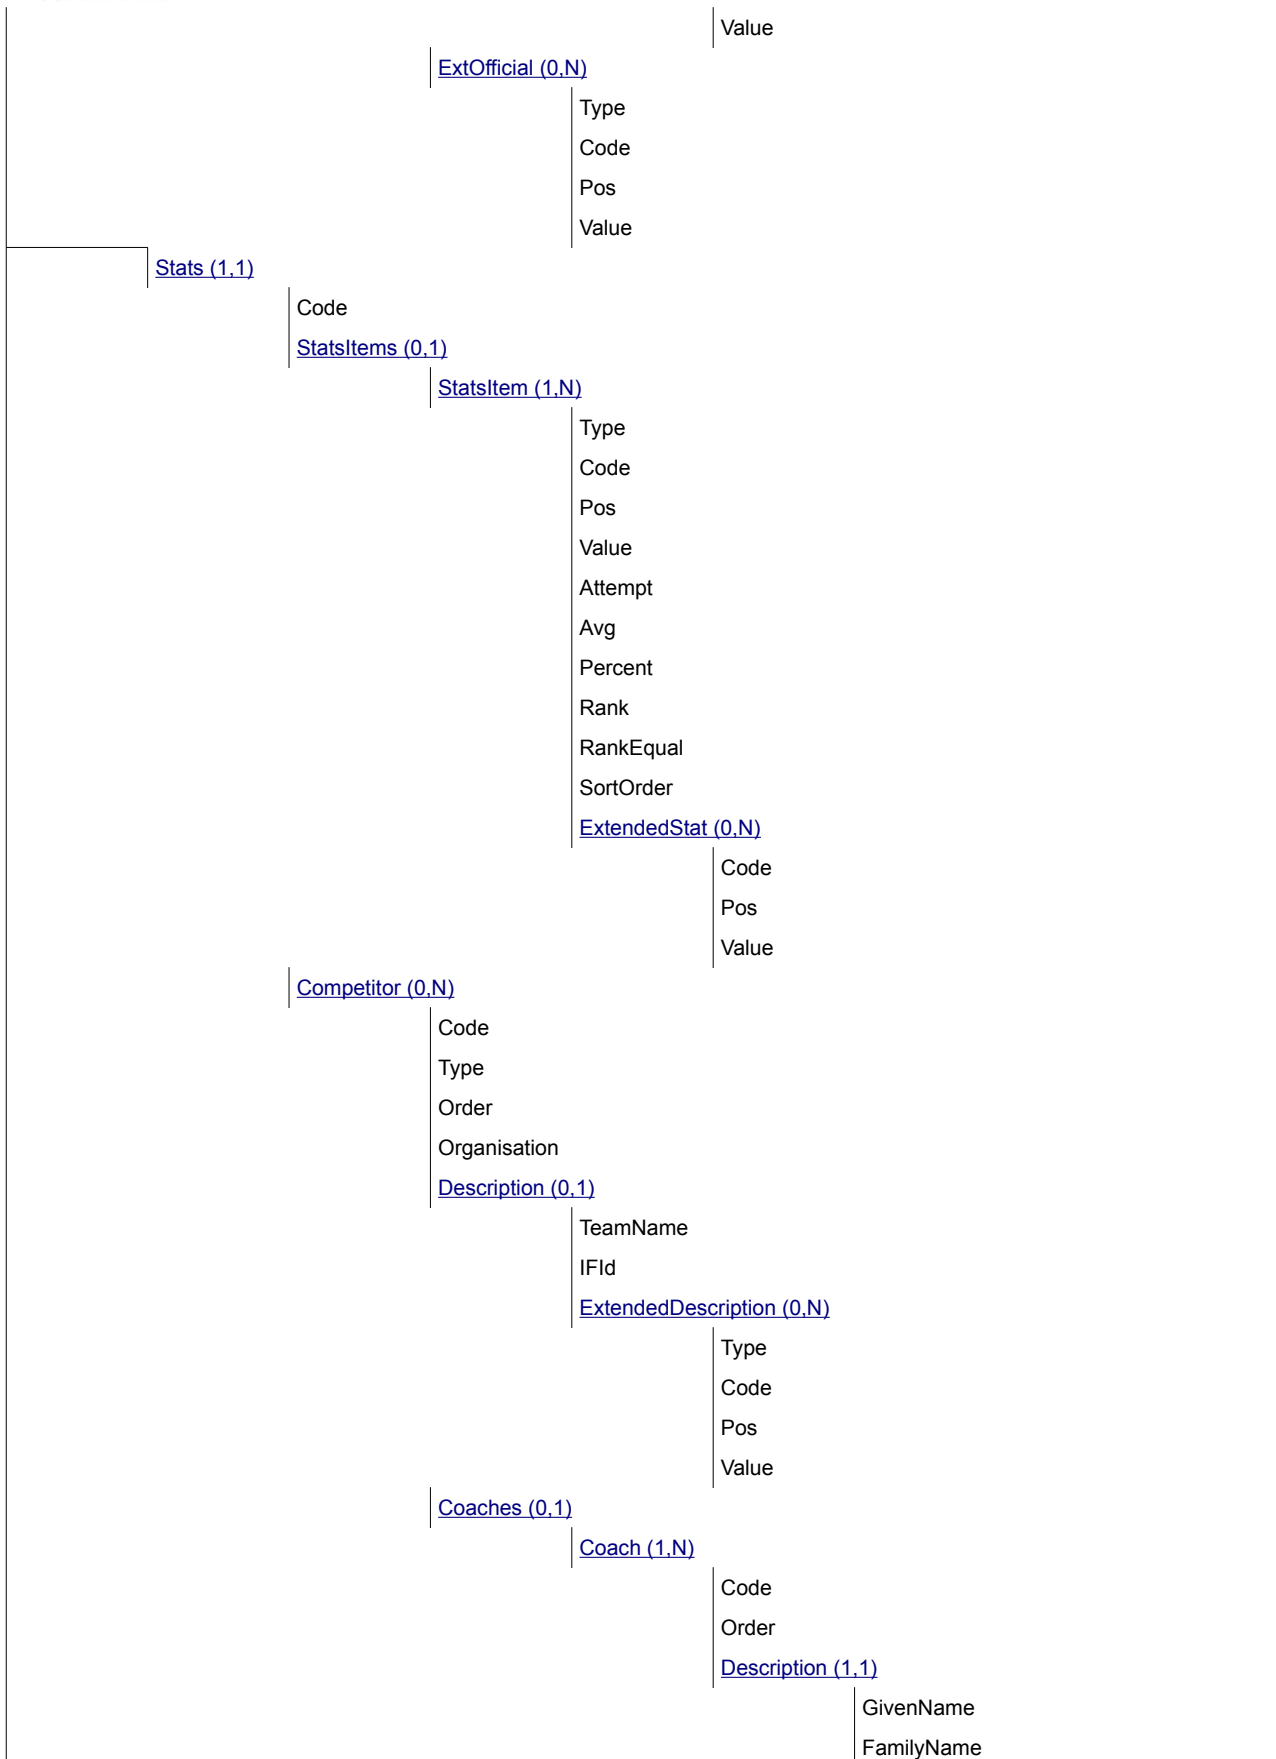



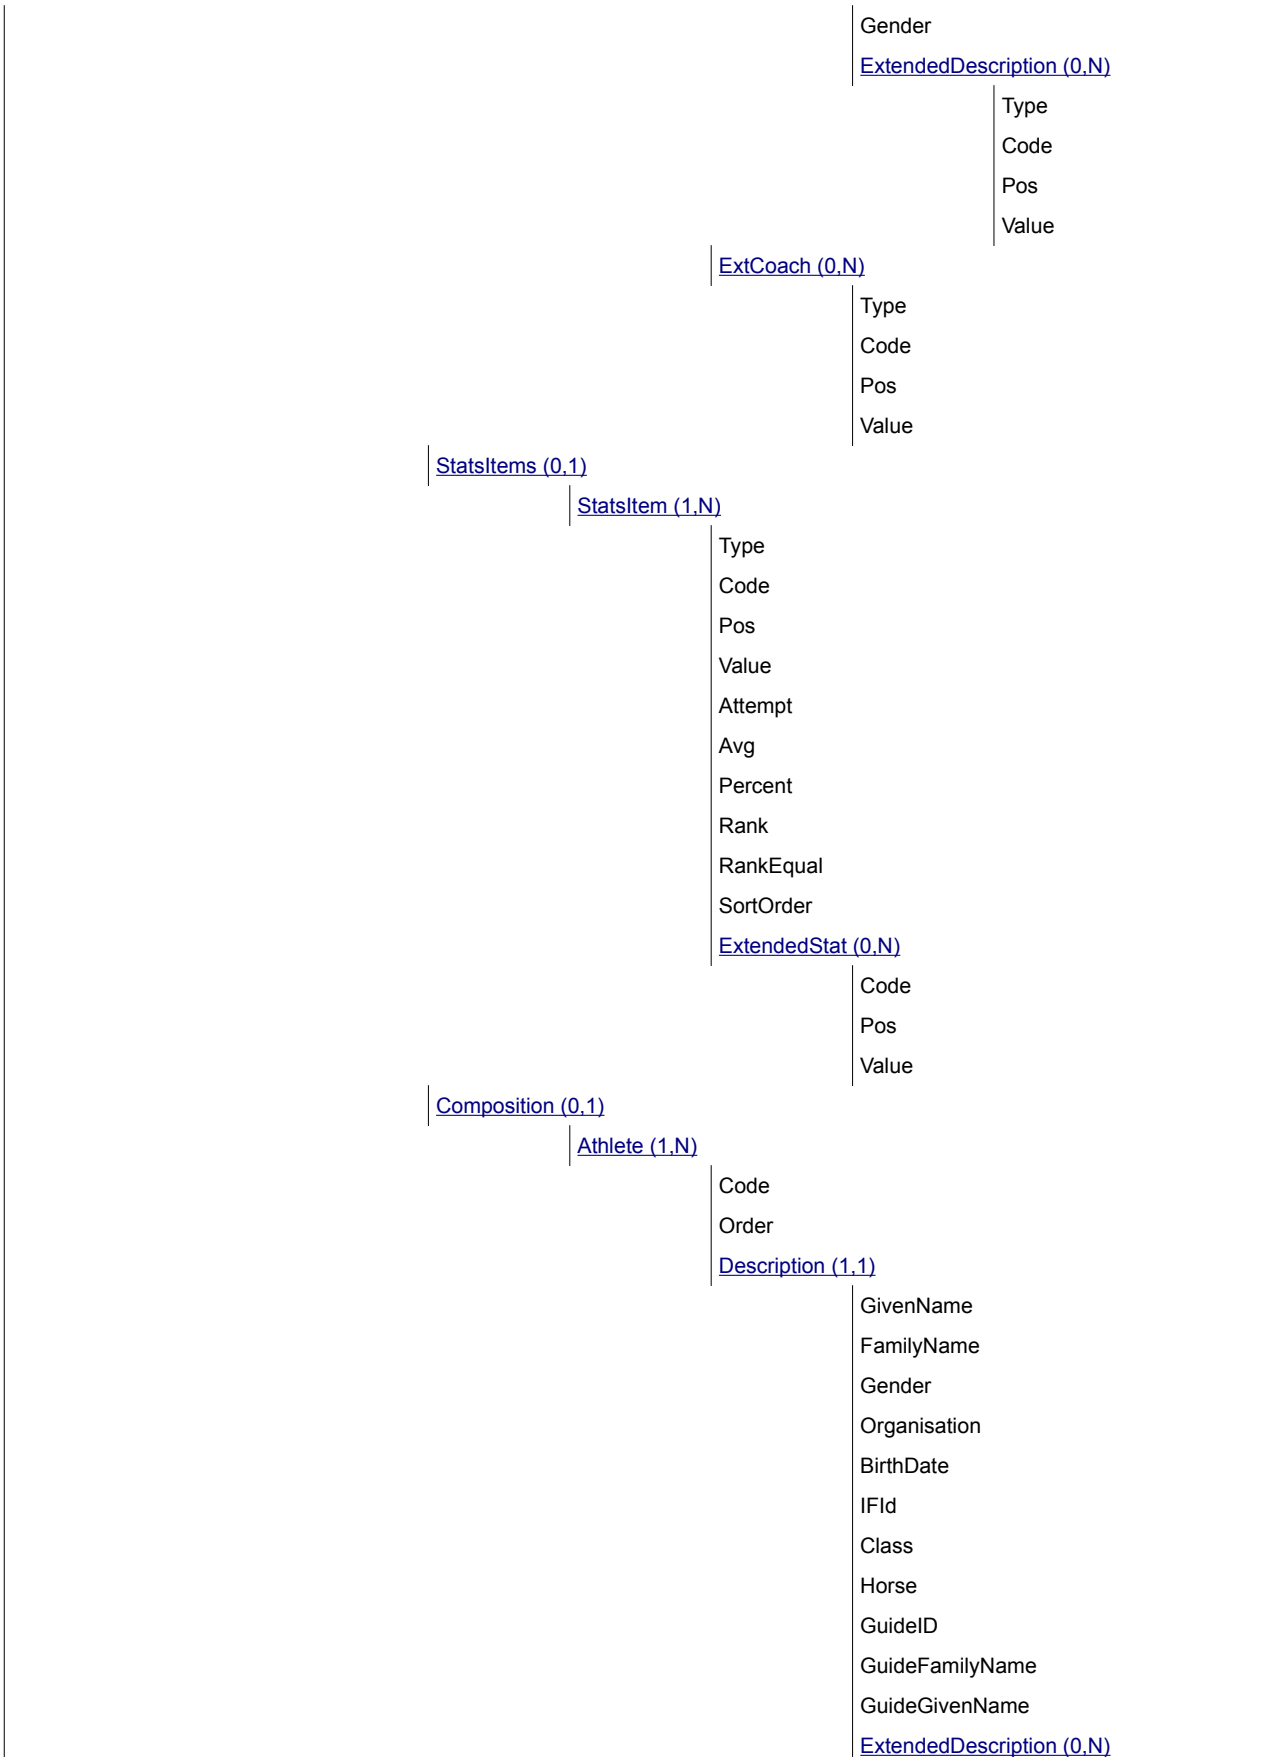



	Type
	Code
	Pos
	Value
	<a href="#">StatsItems (0,1)</a>
	<a href="#">StatsItem (1,N)</a>
	Type
	Code
	Pos
	Value
	Attempt
	Avg
	Percent
	Rank
	RankEqual
	SortOrder
	<a href="#">ExtendedStat (0,N)</a>
	Code
	Pos
	Value

### 2.1.15.5 Message Values

Element Competition (0,1)			
Attribute	M/O	Value	Description
Gen	O	S(20)	Version of the General Data Dictionary applicable to the message
Sport	O	S(20)	Version of the Sport Data Dictionary applicable to the message
Codes	O	S(20)	Version of the Codes applicable to the message

Element ExtendedInfos /ExtendedInfo (0,N)			
Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element ExtendedInfos /ExtendedInfo /Extension (0,N)			
Attribute	M/O	Value	Description
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element ExtendedInfos /Progress (0,1)			
---------------------------------------	--	--	--



Attribute	M/O	Value	Description
LastUnit	O	<a href="#">CC @Unit</a>	Full RSC of the last unit completed (or in progress if applicable) related to the message's content
UnitsTotal	O	Numeric ##0	Total units expected related data impacting this message.
UnitsComplete	O	Numeric ##0	Total units completed which have related data impacting this message.

**Element ExtendedInfos /Progress /Extension (0,N)**

Attribute	M/O	Value	Description
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Table comment: Attribute to be set Mandatory from Optional or redefined. Refer to the ODF Sport Data Dictionary for each of the disciplines

**Element ExtendedInfos /SportDescription (0,1)**

**Sport Description in Text**

Attribute	M/O	Value	Description
DisciplineName	M	S(40)	Discipline name (not code) from Common Codes
EventName	O	S(40)	Event name (not code) from Common Codes.
Gender	O	CC @SportGender	Gender code for the event unit

**Element ExtendedInfos /VenueDescription (0,1)**

**Venue Names in text.**

Attribute	M/O	Value	Description
Venue	M	<a href="#">CC @VenueCode</a>	Venue code
VenueName	M	S(25)	Venue Description (not code) from Common Codes
Location	O	<a href="#">CC @Location</a>	Location Code
LocationName	O	S(30)	Location Description (not code) from Common Codes

**Element Competition /Officials /Official (1,N)**

Attribute	M/O	Value	Description
Code	M	S(20) with no leading zeroes	Official's code
Order	M	Numeric #0	Official's order. 1..n send 1 if only one official.

**Element Competition /Officials /Official /Description (1,1)**

Attribute	M/O	Value	Description
GivenName	O	S(25)	Given name in WNPA format (mixed case)
FamilyName	M	S(25)	Family name in WNPA format (mixed case)
Gender	M	<a href="#">CC @PersonGender</a>	Gender of the official
Organisation	M	<a href="#">CC @Organisation</a>	Official's organisation

**Element Competition /Officials /Official /Description /ExtendedDescription (0,N)**

Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Table comment: Attribute to be set Mandatory from Optional or redefined. Refer to the ODF Sport Data Dictionary for each of the disciplines

Element Competition /Officials /Official /ExtOfficial (0,N)			
Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Table comment: Attribute to be set Mandatory from Optional or redefined. Refer to the ODF Sport Data Dictionary for each of the disciplines

Element Stats (1,1)			
Attribute	M/O	Value	Description
Code	M	See table comment	A code to identify the statistics being listed.  It must be the same as the DocumentSubtype attribute in the header.

Table comment: Attribute to be set Mandatory from Optional or redefined. Refer to the ODF Sport Data Dictionary for each of the disciplines

Element Stats /StatsItems /StatsItem (1,N)			
Statistics for the event unit / phase or event - depending on the headers' DocumentCode.			
Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	
Attempt	O	See sport specific definition	
Avg	O	See sport specific definition	Related to average
Percent	O	See sport specific definition	Related to percentage
Rank	O	See sport specific definition	Rank for this specific Item.
RankEqual	O	S(1)	Identifies if a rank has been equalled. Send Y if applicable else not sent.
SortOrder	O	See sport specific definition	Similar to rank but considering all data including those without rank.

Element Stats /StatsItems /StatsItem /ExtendedStat (0,N)			
Extended information for the statistics for the event unit / phase or event – depending on the headers' DocumentCode.			
Attribute	M/O	Value	Description
Code	O	See sport specific definition	



Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element Stats /Competitor (0,N)			
Competitor of the statistics.			
Attribute	M/O	Value	Description
Code	M	S(20) with no leading zeroes	Competitor's ID to be assigned a specific type of statistic.  The competitor should be participating in the event / phase / event unit depending on the DocumentCode in the message's header.
Type	M	S(1)	A for athlete, T for team
Order	M	Numeric	Order of the competitor in the statistics
Organisation	O	<a href="#">CC @Organisation</a>	Competitor's organisation if known

Element Stats /Competitor /Description (0,1)			
Attribute	M/O	Value	Description
TeamName	M	S(73)	Name of the team. Only applies for teams / groups.
IFId	O	S(16)	Team IF number, send if available

Element Stats /Competitor /Description /ExtendedDescription (0,N)			
Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element Stats /Competitor /Coaches /Coach (1,N)			
Attribute	M/O	Value	Description
Code	M	S(20) with no leading zeroes	Coach's ID
Order	M	Numeric #0	Order attribute used to sort coaches.

Element Stats /Competitor /Coaches /Coach /Description (1,1)			
Attribute	M/O	Value	Description
GivenName	O	S(25)	Given name in WNPA format (mixed case)
FamilyName	M	S(25)	Family name in WNPA format (mixed case)
Gender	M	<a href="#">CC @PersonGender</a>	Gender of the coach

Element Stats /Competitor /Coaches /Coach /Description /ExtendedDescription (0,N)			
Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	



Table comment: Attribute to be set Mandatory from Optional or redefined. Refer to the ODF Sport Data Dictionary for each of the disciplines

Element Stats /Competitor /Coaches /Coach /ExtCoach (0,N)			
Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Table comment: Attribute to be set Mandatory from Optional or redefined. Refer to the ODF Sport Data Dictionary for each of the disciplines

Element Stats /Competitor /StatsItems /StatsItem (1,N)			
Team competitor's stats item, according to competitors' rules.			
Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	
Attempt	O	See sport specific definition	
Avg	O	See sport specific definition	Related to average
Percent	O	See sport specific definition	Related to percentage
Rank	O	See sport specific definition	Rank of the competitor for this specific Item.
RankEqual	O	S(1)	Identifies if a rank has been equalled. Send Y if applicable else not sent.
SortOrder	O	See sport specific definition	Similar to rank but considering all competitors (those with IRM or no rank at this Item)

Element Stats /Competitor /StatsItems /StatsItem /ExtendedStat (0,N)			
Team competitor's extended stat, according to competitors' rules.			
Attribute	M/O	Value	Description
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element Stats /Competitor /Composition /Athlete (1,N)			
Attribute	M/O	Value	Description
Code	M	S(20) with no leading zeroes	Athlete's ID, corresponding to either a team member or an individual athlete
Order	M	Numeric	Order attribute used to sort team members in a team (if Competitor @Type="T") or 1 if Competitor @Type="A".

Table comment: Attribute to be set Mandatory from Optional or redefined. Refer to the ODF Sport Data Dictionary for each of the disciplines

Element Stats /Competitor /Composition /Athlete /Description (1,1)			
Attribute	M/O	Value	Description



GivenName	O	S(25)	Given name in WNPA format (mixed case)
FamilyName	M	S(25)	Family name in WNPA format (mixed case)
Gender	M	<a href="#">CC @PersonGender</a>	Gender of the athlete
Organisation	M	<a href="#">CC @Organisation</a>	Athletes' organisation
BirthDate	O	Date	Birth date (example: YYYY-MM-DD). Must include if the data is available
IFld	O	S(16)	International Federation ID
Class	O	CC @DisplineClass	Code to identify the sport class in the case of events with athletes with a disability (e.g: Paralympic Games). This attribute is optional because it is not used in events without such athletes.
Horse	O	S(25)	Name of the athlete's horse
GuideID	O	S(20) without leading zeros	ID of the Guide, used for some athletes with a disability (e.g: Paralympic Games).
GuideFamilyName	O	S(25)	Family Name of the athlete's guide (mixed case).
GuideGivenName	O	S(25)	Given Name of the athlete's guide (mixed case).

Element Stats /Competitor /Composition /Athlete /Description /ExtendedDescription (0,N)			
Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element Stats /Competitor /Composition /Athlete /StatsItems /StatsItem (1,N)			
Team member's or individual athlete's stats item, depending on whether Competitor @Type="T" or Competitor @Type="A" according to competitors' rules.			
Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	
Attempt	O	See sport specific definition	
Avg	O	See sport specific definition	Related to average
Percent	O	See sport specific definition	Related to percentage
Rank	O	See sport specific definition	Rank of the competitor for this specific Item.
RankEqual	O	S(1)	Identifies if a rank has been equalled. Send Y if applicable else not sent.
SortOrder	O	See sport specific definition	Similar to rank but considering all competitors (those with IRM or no rank at this Item)

Element Stats /Competitor /Composition /Athlete /StatsItems /StatsItem /ExtendedStat (0,N)			
Team member's or individual athlete's extended stat, depending on whether Competitor @Type="T" or Competitor @Type="A" according to competitors' rules.			
Attribute	M/O	Value	Description
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	



INTERNATIONAL  
OLYMPIC  
COMMITTEE

### **2.1.15.6 Message Sort**

Sort according to the @Order attributes.

SOG-2020-GEN-2.2 APP



## 2.1.16 Records

### 2.1.16.1 Description

This message applies for all records depending on the sport.

The message contains the list of all records from the start of the Games (events depending on header).

Special Situations - Not Established Records:

There are some situations where there are no records for a particular event. This can happen, for example, when the sport rules change (different weights or distances) or new events are introduced.

If this occurs then the NotEstablished flag is used to indicate this situation.

If a record is established for this event in the current competition then the NotEstablished flag and description will not be sent when a new record is established.

### 2.1.16.2 Header Values

The following table describes the message header attributes.

Attribute	Value	Comment
CompetitionCode	<a href="#">CC.@Competition</a>	Unique ID for competition
DocumentCode	<a href="#">CC.@Discipline</a>	Full RSC of the Discipline
DocumentSubcode	CC.@RecordCode	If the message is sent as a result of a record being modified (broken, equalled or re-instated) then this attribute will be included and is the Record Event for the modification.
DocumentType	DT_RECORD	Records message
DocumentSubtype	FULL, PARTIAL	Send "FULL" if all records included. Send "PARTIAL" if only one record code is included.
Version	1..V	Version number associated to the message's content. Ascendant number
FeedFlag	"P"-Production "T"-Test	Test message or production message.
Date	Date	Date when the message is generated, expressed in the local time zone where the message was produced.
Time	Time	Time up to milliseconds when the message is generated, expressed in the local time zone where the message was produced.
LogicalDate	Date	Logical Date of events. This is the same as the physical day except when the unit or message transmission extends after midnight. See full explanation in ODF Foundation.
Source	<a href="#">SC.@Source</a>	Code indicating the system which generated the message.

### 2.1.16.3 Trigger and Frequency

The DT\_RECORD (without DocumentSubcode) message is sent as a bulk message (all records in a discipline) prior to the competition. Any new version of the DT\_RECORD message should replace all previous record information, either for the RecordCode specified in DocumentSubcode or all if no DocumentSubcode is specified.


Note: It is sent by central systems before the competition with the historical records and by OVR after competition starts with each new record set or equalled.



### 2.1.16.4 Message Structure

The following table defines the structure of the message.

Level 1	Level 2	Level 3	Level 4	Level 5	Level 6	Level 7	Level 8	Level 9	Level 10
<a href="#">Competition (0.1)</a>									
	Gen								
	Sport								
	Codes								
	<a href="#">ExtendedInfos (0.1)</a>								
		<a href="#">ExtendedInfo (0.N)</a>							
			Type						
			Code						
			Pos						
			Value						
			<a href="#">Extension (0.N)</a>						
						Code			
						Pos			
						Value			
		<a href="#">SportDescription (0.1)</a>							
			DisciplineName						
	<a href="#">Record (1.N)</a>								
		Code							
		<a href="#">Description (1.1)</a>							
			Name						
		<a href="#">RecordType (1.N)</a>							
			Order						
			RecordType						
			Subcode						
			Shared						
			NotEstablished						
			NotEstablishedLabel						
			<a href="#">RecordData (0.N)</a>						
			Order						
			ResultType						
			Result						
			Unit						
			Country						
			Place						
			Date						
			Time						
			Equalled						
			Unconfirmed						
			Competition						
			Historical						
			Current						

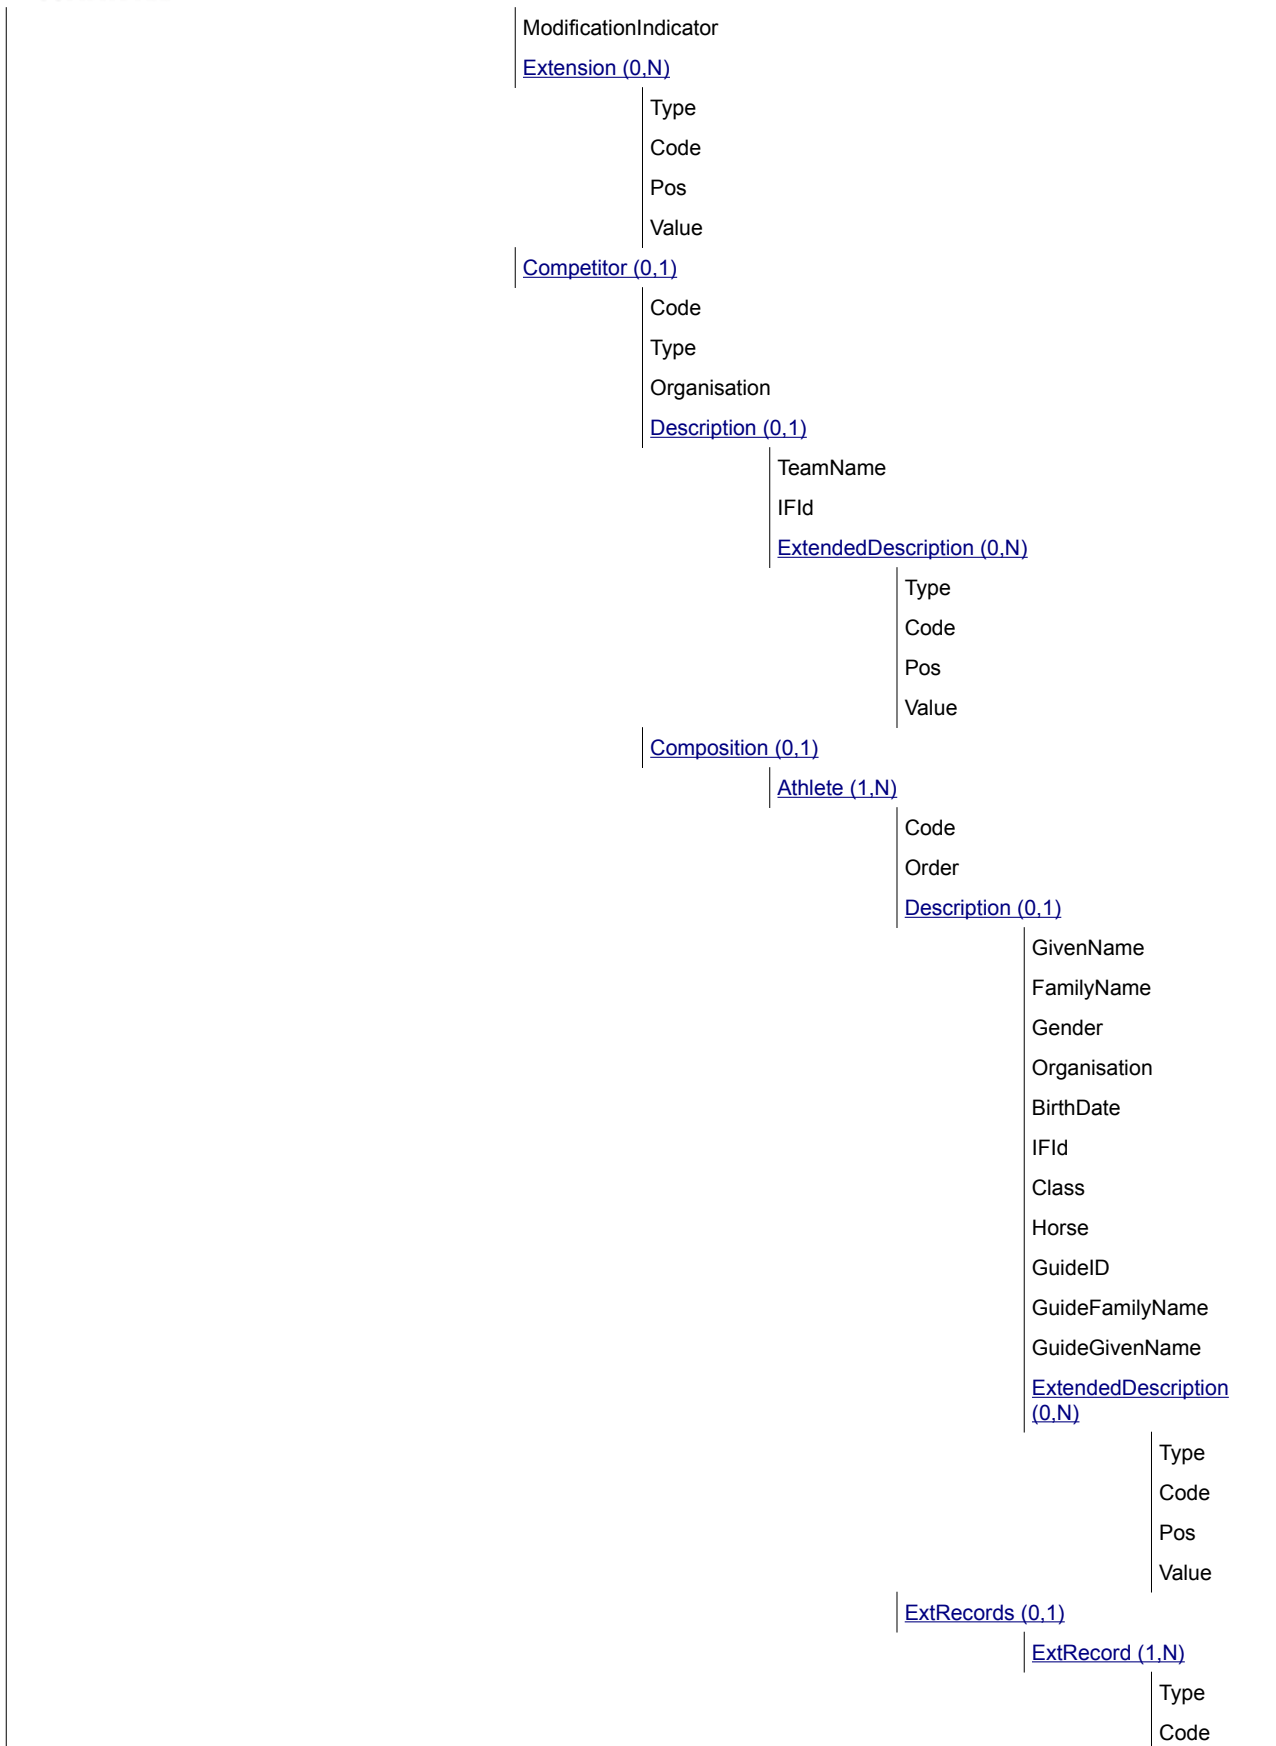

	Pos
	Value

### 2.1.16.5 Message Values

Element Competition (0,1)			
Attribute	M/O	Value	Description
Gen	O	S(20)	Version of the General Data Dictionary applicable to the message
Sport	O	S(20)	Version of the Sport Data Dictionary applicable to the message
Codes	O	S(20)	Version of the Codes applicable to the message

Element ExtendedInfos /ExtendedInfo (0,N)			
Attribute	M/O	Value	Description
Type	M	See sport specific definition	
Code	M	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element ExtendedInfos /ExtendedInfo /Extension (0,N)			
Attribute	M/O	Value	Description
Code	M	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element ExtendedInfos /SportDescription (0,1)			
Sport Description in Text			
Attribute	M/O	Value	Description
DisciplineName	M	S(40)	Discipline name (not code) from Common Codes

Element Record (1,N)			
Attribute	M/O	Value	Description
Code	M	<a href="#">CC.@RecordCode</a>	Record code. Send all record codes in the bulk message else this must match the DocumentSubcode, that is, only one per message.

### Sample (Individual Event)



```
<Record Code="ARCM70M72-----">
  <Description Name="Men 72 Arrows Ranking Round" />
  <RecordType RecordType="WR" Order="1" Shared="N">
    <RecordData Order="1" ResultType="POINTS" Result="699" Unit="ARCM70M-----QUAL0001----"
Country="GBR" Place="London" Date="2012-07-27" Time="105830427" Competition="The XXX Olympic Summer
Games in 2012" Historical="N" Current="Y" ModificationIndicator="N" >
      <Extension Code="XS_NUM" Value="22" />
      <Competitor Code="1098720" Type="A" Organisation="NZL" >
        <Composition>
          <Athlete Code="1098720" Order="1">
            <Description FamilyName="Smith" GivenName="John" Gender="M" Organisation="NZL" IFId="12920"
BirthDate="1989-12-15" />
          </Athlete>
        </Composition>
      </Competitor>
    </RecordData>
  </RecordType>
</Record>
```

### Sample (Not Established Record)

```
<Record Code="ATHM10000M-----">
  <Description Name="10,000metres Men" />
  <RecordType RecordType="FOR" Order="2" NotEstablished="Y" NotEstablishedLabel ="Not Established"
Shared="N" >
  </RecordType>
</Record>
```

### Sample (Teams)



```
<Record Code="ATHW4X100M-----">
  <Description Name="Women's 4 x 100 metres Relay" />
  <RecordType RecordType="WR" Order="1" Shared="N" >
    <RecordData Order="1" ResultType="TIME" Result="36.84" Unit="ATHW4X100M-----FNL-0001----"
    Country="GBR" Place="London" Date="2012-08-11" Time="210600000" Competition="Olympic Games"
    Historical="N" Current="Y" ModificationIndicator="N" >
      <Competitor Code="ATHW4X100M--JAM01" Type="T" Organisation="JAM" >
        <Description TeamName="Jamaica" />
        <Composition>
          <Athlete Code="1020436" Order="1" >
            <Description FamilyName="Smith" GivenName="Joan" Gender="W" Organisation="JAM"
            BirthDate="1990-12-15" />
          </Athlete>
          <Athlete Code="1020467" Order="2" >
            <Description FamilyName="Brown" GivenName="Mary" Gender="W" Organisation="JAM"
            BirthDate="1992-12-11" />
          </Athlete>
          <Athlete Code="1020433" Order="3" >
            <Description FamilyName="White" GivenName="Jane" Gender="W" Organisation="JAM"
            BirthDate="1987-12-13" />
          </Athlete>
          <Athlete Code="1020434" Order="4" >
            <Description FamilyName="Busby" GivenName="Barb" Gender="W" Organisation="JAM"
            BirthDate="1994-12-17" />
          </Athlete>
        </Composition>
      </Competitor>
    </RecordData>
  </RecordType>
</Record>
```

Element Record /Description (1,1)			
Attribute	M/O	Value	Description
Name	M	S(40)	Record description (not code) from Common Codes

Element Record /RecordType (1,N)			
It is possible to have more than one element with the same type (as in the case of National Records).			
Attribute	M/O	Value	Description
Order	M	Numeric #0	The hierarchy (priority) for types of record from 1 to n. (Can use the Order column from CC @RecordType to assist in case several records are broken, from high priority to low priority but must still use 1 to n).
RecordType	M	<a href="#">CC @RecordType</a>	Record type.
Subcode	O	- NOC if RecordType = "NR" or "NB" - Rank if RecordType = "BOP", "ALL" or "SBP" - WRC order if RecordType = "WRC"	It will be mandatory in case of RecordType = "NR", "NB", "BOP", "WRC", "ALL" and "SBP".
Shared	M	S(1)	Y-There is more than one competitor sharing the record N-There is just one competitor holding the record
NotEstablished	O	S(1)	Send "Y" in the case there is no record in this category else do not send.
NotEstablishedLabel	O	S(25)	The description to be used in the case that



			NotEstablished="Y".
--	--	--	---------------------

<b>Element Record /RecordType /RecordData (0,N)</b>			
<b>RecordData is not sent for NotEstablished Records unless a "standard" applies</b>			
<b>Attribute</b>	<b>M/O</b>	<b>Value</b>	<b>Description</b>
Order	M	Numeric #0	In the case that a record (RecordType) is provided several times in the message, then Order is the chronological order for the records (1,N). 1 will be usually the historical record and for each record broken during the competition a new order value will be provided. Usually first time the record is broken will have Order="2", second time Order="3" etc. Send 1 for records (RecordType) not shared (historical records)
ResultType	M	See table comments	Indicates whether the record result is a distance, a time, etc.
Result	O	See table comments	Send always unless the record is not established (can be sent for not established if there is a standard). The performance of the competitor for the record.
Unit	O	<a href="#">CC @Unit</a>	The full RSC of the unit in the current competition where the record was broken. Send always (Mandatory) in the case Historical="N".
Country	O	<a href="#">CC @Country</a>	Always send for new records and where known for historical records. Not applicable for not established records
Place	O	S(40)	Always send for new records and where known for historical records. Not applicable for not established records. Place (town or city) where the record was broken (example: "Salt Lake City").
Date	O	YYYY-MM-DD	Always send for new records and where known for historical records. Not applicable for not established records. Date when the record was broken (for the current competition, the date will be assumed to be the date scheduled for the @Unit attribute)
Time	O	Time	Time the record was set. Send always (Mandatory) in the case of Historical="N".
Equalled	O	S(1)	Send "Y" if the existing record is equalled. Do not send if the record is not equalled.
Unconfirmed	O	S(1)	Send only in the case that Historical="Y" and if it is required in the specific discipline, since some historical records / record types may not be confirmed. Send "Y" if the record is Unconfirmed else do not send. The normal situation is do not send.
Competition	O	S(40)	Send the text of the competition name where the record was broken (example: "2013 World Championships", "2012 Olympic Games", etc.).
Historical	M	S(1)	Send "Y" if the record for competitor was not achieved during the current competition. Send "N" if the record for the competitor was achieved during the current competition.
Current	O	S(1)	Send "Y" in the case that this is the current record else do not send (may be multiple in the case of a shared record).
ModificationIndicator	O	S(1)	The possible values are: "N" = New broken record (not provided in a previous message) "R" = This record is re-instated/re-established as the current record in this message (following an invalidation or similar). Do not send this attribute for other records included in the message (not broken or not re-instated)

Table comment: Attribute to be set Mandatory from Optional or redefined. Refer to the ODF Sport Data Dictionary for each of the disciplines



Element Record /RecordType /RecordData /Extension (0,N)			
Attribute	M/O	Value	Description
Type	M	See sport specific definition	
Code	M	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element Record /RecordType /RecordData /Competitor (0,1)			
Competitor to whom the record is assigned.			
Athlete's or team's information should be in DT_PARTIC (Historic) if Competitor @Type="A" or DT_PARTIC_TEAMS (Historic) if Competitor @Type="T".			
Attribute	M/O	Value	Description
Code	M	S(20) with no leading zeroes	Competitor's ID
Type	M	S(1)	A for athlete, T for team
Organisation	O	<a href="#">CC @Organisation</a>	Competitors' organisation if known

Element Record /RecordType /RecordData /Competitor /Description (0,1)			
Competitors extended information.			
Attribute	M/O	Value	Description
TeamName	M	S(73)	Name of the team. Only applies for teams / groups.
IFId	O	S(16)	Team IF number, send if available.

Element Record /RecordType /RecordData /Competitor /Description /ExtendedDescription (0,N)			
Attribute	M/O	Value	Description
Type	M	See sport specific definition	
Code	M	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element Record /RecordType /RecordData /Competitor /Composition /Athlete (1,N)			
Attribute	M/O	Value	Description
Code	M	S(20) with no leading zeroes	Athlete's ID, corresponding to either a team member or an individual athlete
Order	M	Numeric #0	Order attribute used to sort team members in a team if Competitor @Type="T" or 1 if Competitor @Type="A".

Element Record /RecordType /RecordData /Competitor /Composition /Athlete /Description (0,1)			
Athletes extended information.			
Attribute	M/O	Value	Description
GivenName	O	S(25)	Given name in WNPA format (mixed case)
FamilyName	M	S(25)	Family name in WNPA format (mixed case)
Gender	M	<a href="#">CC @PersonGender</a>	Gender of the athlete
Organisation	M	<a href="#">CC @Organisation</a>	Athletes' organisation
BirthDate	O	Date	Birth date (example: YYYY-MM-DD). Must include if the data is available





IFId	O	S(16)	International Federation ID
Class	O	CC @DisplineClass	Code to identify the sport class in the case of events with athletes with a disability (e.g: Paralympic Games).  This attribute is optional because it is not used in events without such athletes.
Horse	O	S(25)	Name of the athlete's horse
GuidelD	O	S(20) without leading zeros	ID of the Guide used in the record, used for some athletes with a disability (e.g: Paralympic Games).
GuideFamilyName	O	S(25)	Family Name of the athlete's guide used in the record (mixed case). Used for some athletes with a disability (e.g: Paralympic Games).
GuideGivenName	O	S(25)	Given Name of the athlete's guide used in the record (mixed case). Used for some athletes with a disability (e.g: Paralympic Games).

Element Record /RecordType /RecordData /Competitor /Composition /Athlete /Description /ExtendedDescription (0,N)			
Attribute	M/O	Value	Description
Type	M	See sport specific definition	
Code	M	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element Record /RecordType /RecordData /Competitor /Composition /Athlete /ExtRecords /ExtRecord (1,N)			
Attribute	M/O	Value	Description
Type	M	See sport specific definition	
Code	M	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

### 2.1.16.6 Message Sort

The following order applies:

- Record @Code
- RecordType @Order
- RecordData @Order

## 2.1.17 Event Final Ranking

### 2.1.17.1 Description

The Event Final Ranking is a message containing the final results and ranking at the completion of one particular event, either for individual athletes or for aggregated athletes.

The final ranking message is a generic message for all sports, including the full event final result for all competitors who were either ranked, got an Invalid Rank Mark (disqualified, etc.), or both.

The mandatory attributes and mandatory elements defined in this message will have to be used by all the sports, although each ODF Sport Data Dictionary will have to explain with further detail the optional attributes or optional elements of the message.

Depending on the sport rules include all competitors in the competition as all can be ranked (as in Marathon) or only include those with a final ranking as other are unranked (as in tennis).

### 2.1.17.2 Header Values

The following table describes the message header attributes.

Attribute	Value	Comment
CompetitionCode	<a href="#">CC @Competition</a>	Unique ID for competition
DocumentCode	<a href="#">CC @Event</a>	Each ODF Sport Data Dictionary will have to complete the explanation regarding to this attribute
DocumentType	DT_RANKING	Event Final ranking message
Version	1..V	Version number associated to the message's content. Ascendant number
ResultStatus	<a href="#">SC @ResultStatus</a>	Result status, indicates whether the data is official or partial. PARTIAL OFFICIAL
FeedFlag	"P"-Production "T"-Test	Test message or production message.
Date	Date	Date when the message is generated, expressed in the local time zone where the message was produced.
Time	Time	Time up to milliseconds when the message is generated, expressed in the local time zone where the message was produced.
LogicalDate	Date	Logical Date of events. This is the same as the physical day except when the unit or message transmission extends after midnight. See full explanation in ODF Foundation.
Source	<a href="#">SC @Source</a>	Code indicating the system which generated the message.

### 2.1.17.3 Trigger and Frequency

This message is only triggered after a unit which affects the final ranking is official and that particular ranking is not subject to change.

Specific triggering conditions are defined in the sport data dictionary.


Trigger also after any change.


### 2.1.17.4 Message Structure

The following table defines the structure of the message.



Level 1	Level 2	Level 3	Level 4	Level 5	Level 6	Level 7	Level 8	Level 9	Level 10	Level 11
<a href="#">Competition (0.1)</a>										
	Gen									
	Sport									
	Codes									
	<a href="#">ExtendedInfos (0.1)</a>									
		<a href="#">ExtendedInfo (0.N)</a>								
			Type							
			Code							
			Pos							
			Value							
			<a href="#">Extension (0.N)</a>							
				Code						
				Pos						
				Value						
			<a href="#">Progress (0.1)</a>							
			LastUnit							
			UnitsTotal							
			UnitsComplete							
			<a href="#">Extension (0.N)</a>							
				Code						
				Pos						
				Value						
			<a href="#">SportDescription (0.1)</a>							
			DisciplineName							
			EventName							
			Gender							
			<a href="#">VenueDescription (0.1)</a>							
			Venue							
			VenueName							
	<a href="#">Result (1.N)</a>									
		Rank								
		RankEqual								
		ResultType								
		Result								
		Diff								
		Played								
		Won								
		Lost								
		Tied								
		IRM								
		SortOrder								
		<a href="#">ExtendedResults (0.1)</a>								
			<a href="#">ExtendedResult (1.N)</a>							

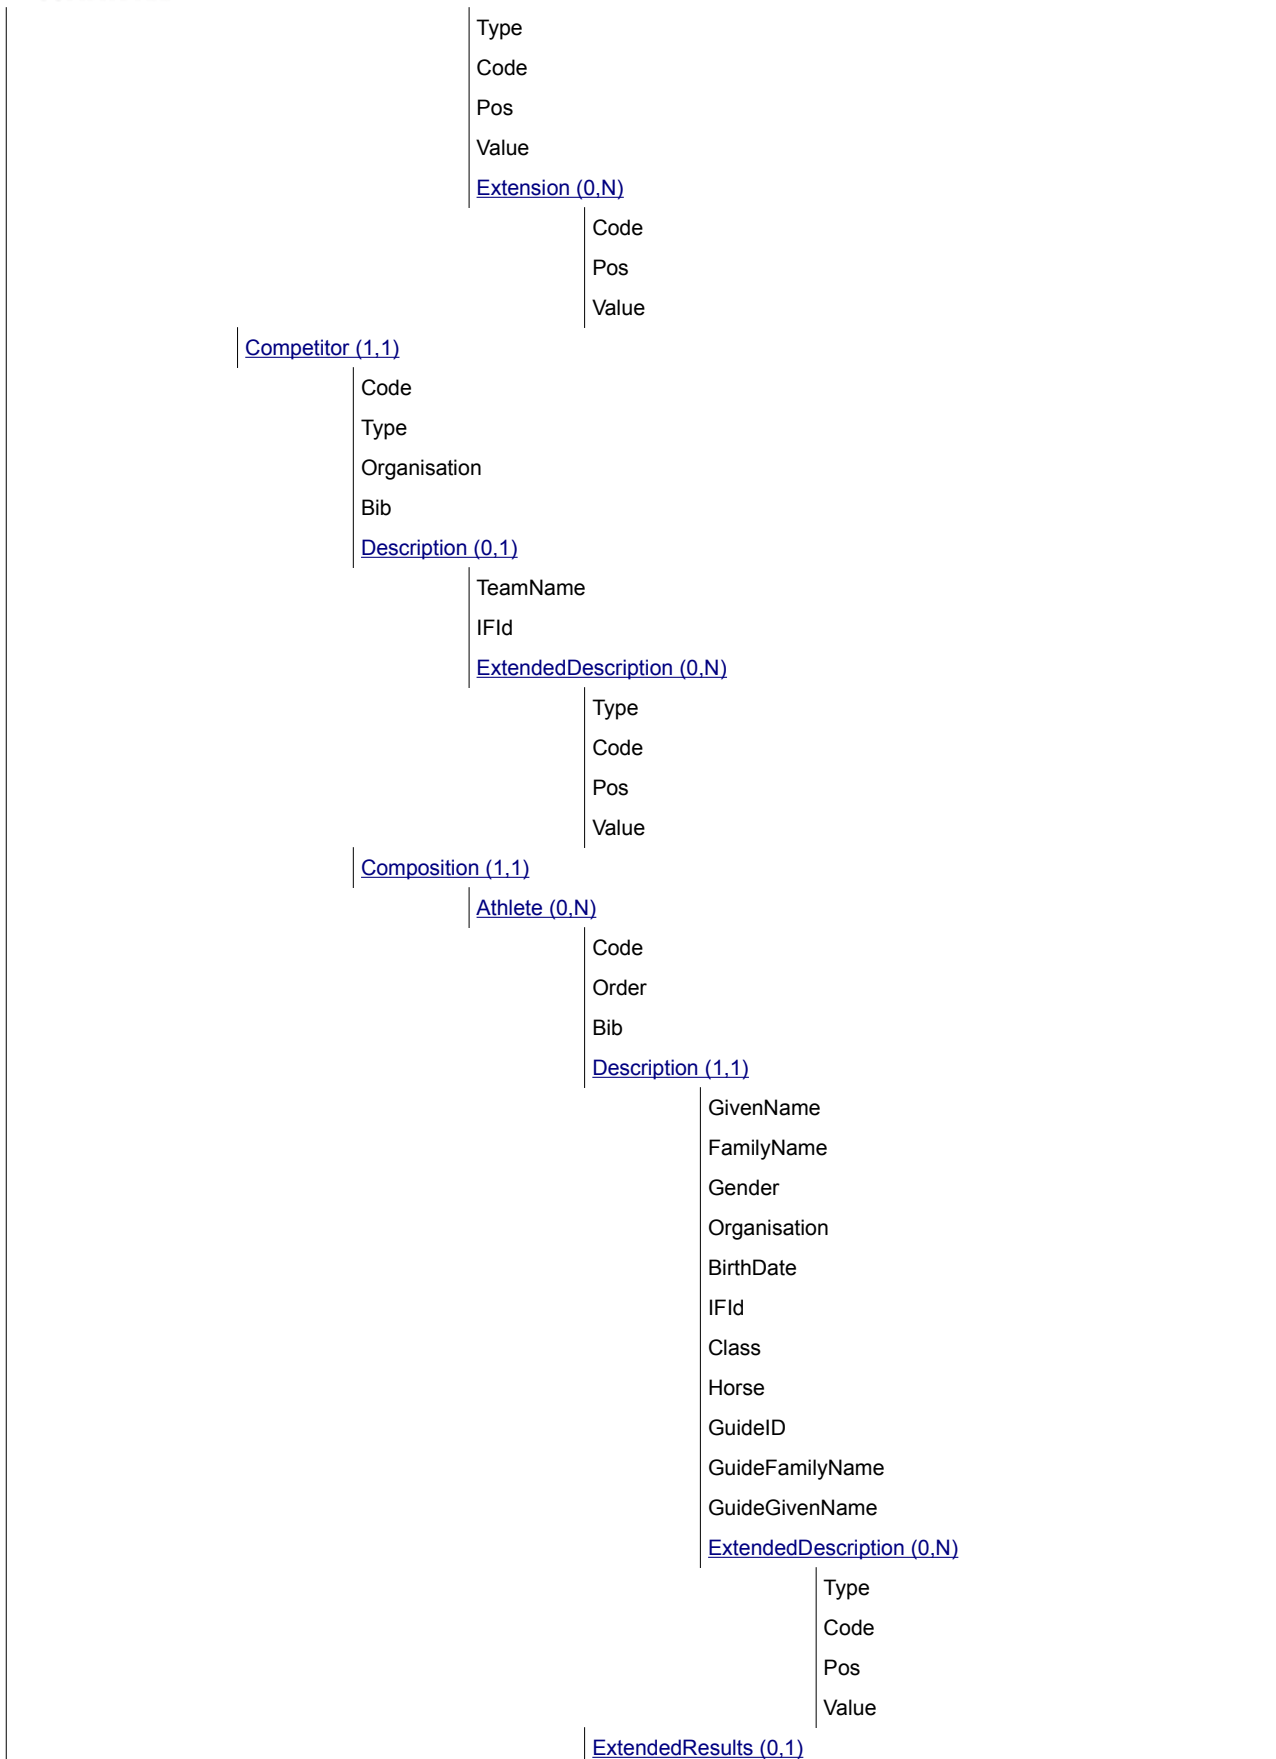

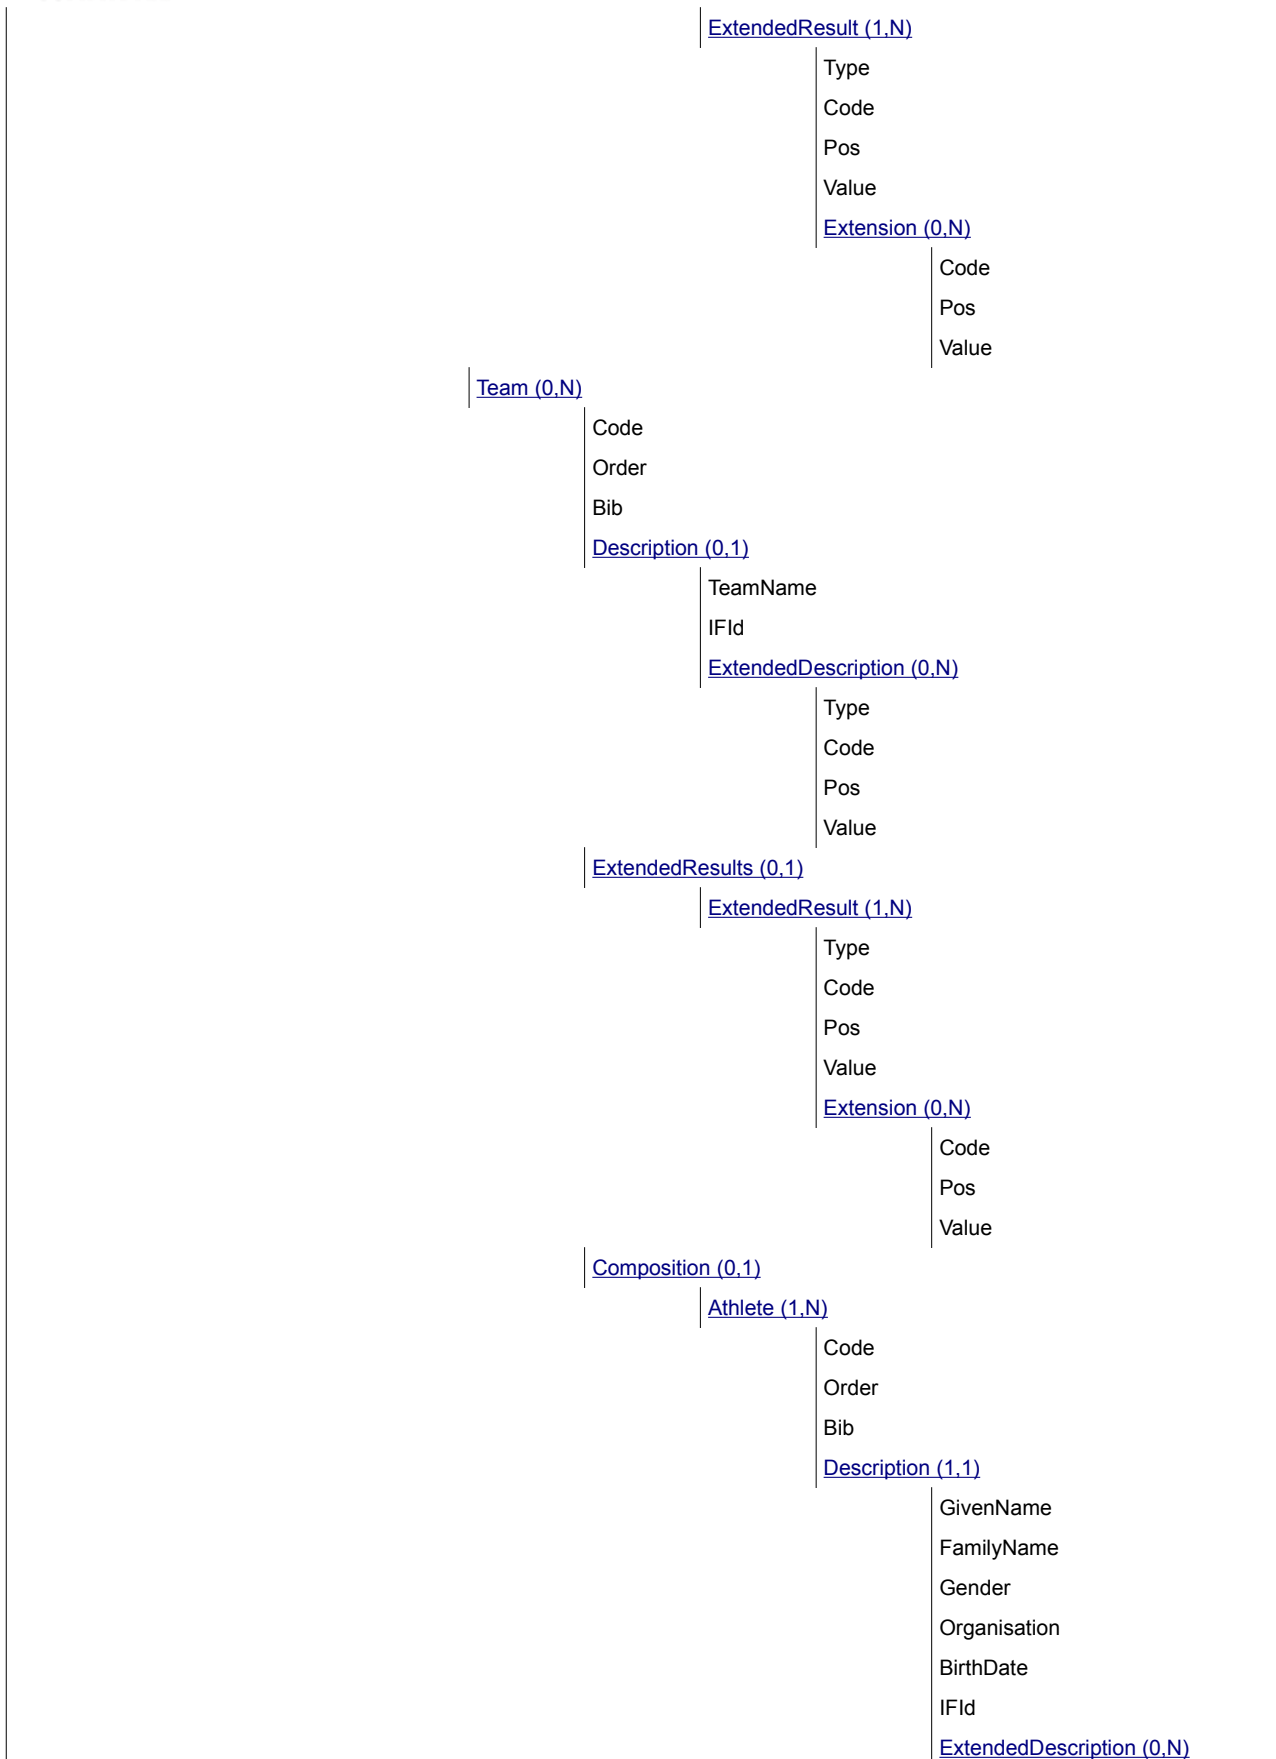

	Type
	Code
	Pos
	Value
	<a href="#">ExtendedResults (0.1)</a>
	<a href="#">ExtendedResult (1.N)</a>
	Type
	Code
	Pos
	Value
	<a href="#">Extension (0.N)</a>
	Code
	Pos
	Value

### 2.1.17.5 Message Values

Element Competition (0,1)			
Attribute	M/O	Value	Description
Gen	O	S(20)	Version of the General Data Dictionary applicable to the message
Sport	O	S(20)	Version of the Sport Data Dictionary applicable to the message
Codes	O	S(20)	Version of the Codes applicable to the message

Element ExtendedInfos /ExtendedInfo (0,N)			
Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element ExtendedInfos /ExtendedInfo /Extension (0,N)			
Attribute	M/O	Value	Description
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element ExtendedInfos /Progress (0,1)			
Attribute	M/O	Value	Description
LastUnit	O	<a href="#">CC @Unit</a>	Full RSC of the last unit completed (or in progress if applicable) related to the message's content
UnitsTotal	O	Numeric ##0	Total units expected related data impacting this message.
UnitsComplete	O	Numeric ##0	Total units completed which have related data impacting this message.



Element ExtendedInfos /Progress /Extension (0,N)			
Attribute	M/O	Value	Description
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Table comment: Attribute to be set Mandatory from Optional or redefined. Refer to the ODF Sport Data Dictionary for each of the disciplines

Element ExtendedInfos /SportDescription (0,1)			
Sport Description in text			
Attribute	M/O	Value	Description
DisciplineName	M	S(40)	Discipline name (not code) from Common Codes
EventName	O	S(40)	Event name (not code) from Common Codes. Must be included if it is a single event
Gender	O	CC @SportGender	Gender code for the event. Must be included if it is a single gender

Element ExtendedInfos /VenueDescription (0,1)			
Venue Names in text			
Attribute	M/O	Value	Description
Venue	M	<a href="#">CC @VenueCode</a>	Venue code
VenueName	M	S(25)	Venue Description (not code) from Common Codes

Element Result (1,N)			
For any event final ranking message, there should be at least one competitor being awarded a result for the event.			
Attribute	M/O	Value	Description
Rank	O	Text See table comment	Rank of the competitor in the result.
RankEqual	O	S(1)	Identifies if a rank has been equalled. Send Y if applicable else not sent.
ResultType	O	See table comment	Type of the @Result attribute
Result	O	See table comment	The result of the competitor in the event
Diff	O	See table comment	Display the time / value behind the leader.
Played	O	Numeric	Number of matches played by the competitor in the event
Won	O	Numeric	Number of matches won by the competitor in the event
Lost	O	Numeric	Number of matches lost by the competitor in the event
Tied	O	Numeric	Number of matches tied by the competitor in the event
IRM	O	See table comment	The invalid result mark, in case it is assigned
SortOrder	M	Numeric	Unique sort order for all results based on rank to break rank ties.

Table comment: Attribute to be set Mandatory from Optional or redefined. Refer to the ODF Sport Data Dictionary for each of the disciplines

Element Result /ExtendedResults /ExtendedResult (1,N)			
Attribute	M/O	Value	Description



Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element Result /ExtendedResults /ExtendedResult /Extension (0,N)			
Attribute	M/O	Value	Description
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element Result /Competitor (1,1)			
Competitor related to one final event result.			
Attribute	M/O	Value	Description
Code	M	S(20) with no leading zeroes or SC @CompetitorPlace or NOC ID	Competitor's ID or another indicator (SC @CompetitorPlace) in the case where there is no competitor in the rank due to IRM. If NOC or NPC, the value will be NOC ID.
Type	M	S(1)	A for athlete, T for team
Organisation	O	<a href="#">CC @Organisation</a>	Competitor's organisation if known
Bib	O	Defined by Discipline	Competitor Bib

Element Result /Competitor /Description (0,1)			
Attribute	M/O	Value	Description
TeamName	M	S(73)	Name of the team. Only applies for teams / groups.
IFld	O	S(16)	Team IF number, send if available

Element Result /Competitor /Description /ExtendedDescription (0,N)			
Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element Result /Competitor /Composition /Athlete (0,N)			
Attribute	M/O	Value	Description
Code	M	S(20) with no leading zeroes	Athlete's ID, corresponding to an individual athlete or a team member. Team members should be participating in the event.
Order	M	Numeric #0	Order attribute used to sort team members in a team (if Competitor @Type="T") or 1 if Competitor @Type="A".
Bib	O	Defined by Discipline	Athlete Bib

Element Result /Competitor /Composition /Athlete /Description (1,1)			
Attribute	M/O	Value	Description
GivenName	O	S(25)	Given name in WNPA format (mixed case)





FamilyName	M	S(25)	Family name in WNPA format (mixed case)
Gender	M	<a href="#">CC @PersonGender</a>	Gender of the athlete
Organisation	M	<a href="#">CC @Organisation</a>	Athletes' organisation
BirthDate	O	Date	Birth date (example: YYYY-MM-DD). Must include if the data is available
IFId	O	S(16)	International Federation ID
Class	O	CC @DisplineClass	Code to identify the sport class in the case of events with athletes with a disability (e.g: Paralympic Games). This attribute is optional because it is not used in events without such athletes.
Horse	O	S(25)	Name of the athlete's horse
GuideID	O	S(20) without leading zeros	ID of the Guide, used for some athletes with a disability (e.g: Paralympic Games).
GuideFamilyName	O	S(25)	Family Name of the athlete's guide (mixed case).
GuideGivenName	O	S(25)	Given Name of the athlete's guide (mixed case).

Element Result /Competitor /Composition /Athlete /Description /ExtendedDescription (0,N)			
Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element Result /Competitor /Composition /Athlete /ExtendedResults /ExtendedResult (1,N)			
Team member's or individual athlete's extended result, depending on whether Competitor @Type="T" or Competitor @Type="A" according to competitors' rules.			
Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element Result /Competitor /Composition /Athlete /ExtendedResults /ExtendedResult /Extension (0,N)			
Extensions of team member's or individual athlete's extended results.			
Attribute	M/O	Value	Description
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element Result /Competitor /Composition /Team (0,N)			
Only applicable in the case of team of teams.			
Attribute	M/O	Value	Description
Code	M	S(20) with no leading zeroes	Team's ID (example ATHM4X400m--ESP01, 393553) When the Team is an historical one, then this ID starts with "T".
Order	M	Numeric	Order of the teams if multiple teams else 1
Bib	O	Defined by Discipline	Bib number, send if available (team bib)



Element Result /Competitor /Composition /Team /Description (0,1)			
Attribute	M/O	Value	Description
TeamName	M	S(73)	Name of the team.
IFId	O	S(16)	International Federation ID

Element Result /Competitor /Composition /Team /Description /ExtendedDescription (0,N)			
Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element Result /Competitor /Composition /Team /ExtendedResults /ExtendedResult (1,N)			
Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element Result /Competitor /Composition /Team /ExtendedResults /ExtendedResult /Extension (0,N)			
Attribute	M/O	Value	Description
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element Result /Competitor /Composition /Team /Composition /Athlete (1,N)			
Attribute	M/O	Value	Description
Code	M	S(20) with no leading zeros	Athlete ID of the listed team's member. Therefore, he/she is a member of the team.
Order	O	Numeric	Team member order
Bib	O	Defined by discipline	Bib number, send if available

Element Result /Competitor /Composition /Team /Composition /Athlete /Description (1,1)			
Attribute	M/O	Value	Description
GivenName	O	S(25)	Given name in WNPA format (mixed case)
FamilyName	M	S(25)	Family name in WNPA format (mixed case)
Gender	M	<a href="#">CC @PersonGender</a>	Gender of the athlete
Organisation	M	<a href="#">CC @Organisation</a>	Athletes' organisation
BirthDate	O	Date	Birth date (example: YYYY-MM-DD). Must include if the data is available.
IFId	O	S(16)	International Federation ID

Element Result /Competitor /Composition /Team /Composition /Athlete /Description /ExtendedDescription (0,N)			
Attribute	M/O	Value	Description
Type	O	See sport specific definition	



Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element Result /Competitor /Composition /Team /Composition /Athlete /ExtendedResults /ExtendedResult (1,N)			
Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element Result /Competitor /Composition /Team /Composition /Athlete /ExtendedResults /ExtendedResult /Extension (0,N)			
Attribute	M/O	Value	Description
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

### 2.1.17.6 Message Sort

Sort by Result @SortOrder

## 2.1.18 Event's Medallists

### 2.1.18.1 Description

The Event's Medallists is a message containing the list of medallists awarded in one particular event.

### 2.1.18.2 Header Values

The following table describes the message header attributes.

Attribute	Value	Comment
CompetitionCode	<a href="#">CC_@Competition</a>	Unique ID for competition
DocumentCode	<a href="#">CC_@Event</a>	Full RSC at event level
DocumentType	DT_MEDALLISTS	Event's Medallists message
Version	1..V	Version number associated to the message's content. Ascendant number
ResultStatus	<a href="#">SC_@ResultStatus</a>	It indicates whether the result is unofficial, official or partial. UNOFFICIAL OFFICIAL PARTIAL
FeedFlag	"P"-Production "T"-Test	Test message or production message.
Date	Date	Date when the message is generated, expressed in the local time zone where the message was produced.
Time	Time	Time up to milliseconds when the message is generated, expressed in the local time zone where the message was produced.
LogicalDate	Date	Logical Date of events. This is the same as the physical day except when the unit or message transmission extends after midnight. See full explanation in ODF Foundation.
Source	<a href="#">SC_@Source</a>	Code indicating the system which generated the message.

### 2.1.18.3 Trigger and Frequency

The message is sent with ResultStatus=PARTIAL when the information of the medallist is known but the final event Unit is not yet finished.

Sent immediately after the unit is finished and the results are unofficial or in the case of longer duration events send before the unit is finished but as soon as the medallists are confirmed. In case of any delay in publishing unofficial results it must be sent at the latest 5 minutes before any ceremony starts with Status=UNOFFICIAL. To be clear, this message must be sent before any ceremony.

The message is sent with ResultStatus=OFFICIAL when the medallists are officially known in the sport.

For some sports, bronze medals are known before the end of the final event unit. In this case the message is sent the first time with the bronze medallists, and the second time with all the medallists.

In summary:


- Normal case (where the results quickly become official): DT\_MEDALLISTS is sent with ResultStatus=OFFICIAL when the event is OFFICIAL
- Separate units to determine all medals: DT\_MEDALLISTS is sent with ResultStatus=PARTIAL after the Bronze Medals are known and then OFFICIAL after event is completed and all units are OFFICIAL.
- Mass start sports when the TD allows to release of medallists: DT\_MEDALLISTS is sent with ResultStatus=UNOFFICIAL before the result is official (or even not all competitors are finished) and OFFICIAL after event is completed and the results OFFICIAL.




### 2.1.18.4 Message Structure

The following table defines the structure of the message.

Level 1	Level 2	Level 3	Level 4	Level 5	Level 6	Level 7	Level 8	Level 9	Level 10
<a href="#">Competition (0.1)</a>									
	Gen								
	Sport								
	Codes								
	<a href="#">ExtendedInfos (0.1)</a>								
		<a href="#">ExtendedInfo (0.N)</a>							
			Type						
			Code						
			Pos						
			Value						
			<a href="#">Extension (0.N)</a>						
				Code					
				Pos					
				Value					
			<a href="#">SportDescription (0.1)</a>						
			DisciplineName						
			EventName						
			Gender						
			<a href="#">VenueDescription (0.1)</a>						
			Venue						
			VenueName						
	<a href="#">Medal (1.N)</a>								
		Code							
		Unit							
		Date							
		<a href="#">Competitor (1.1)</a>							
			Code						
			Type						
			Order						
			Bib						
			Organisation						
			<a href="#">Description (0.1)</a>						
				TeamName					
				IFId					
				<a href="#">ExtendedDescription (0.N)</a>					
				Type					
				Code					
				Pos					
				Value					
			<a href="#">Officials (0.1)</a>						
				<a href="#">Official (1.N)</a>					

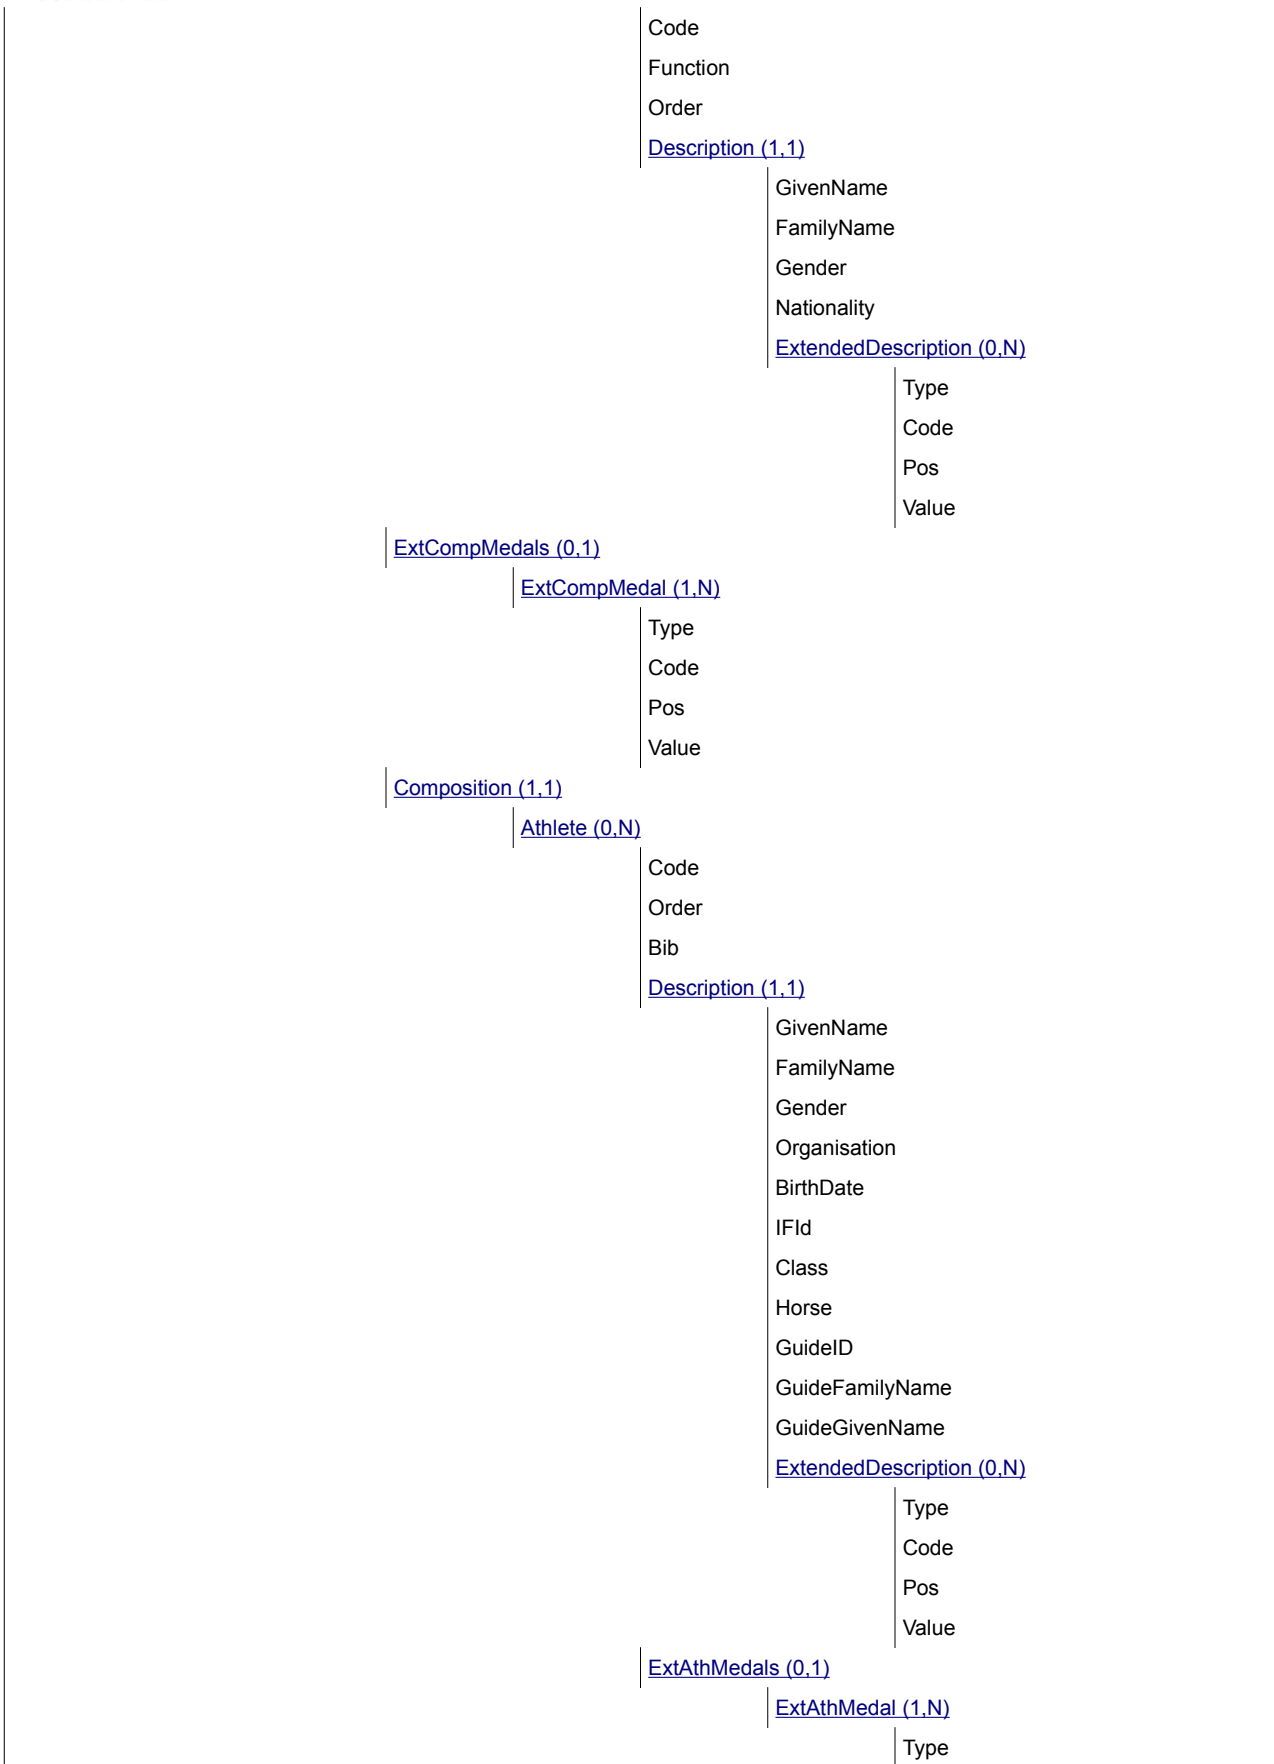

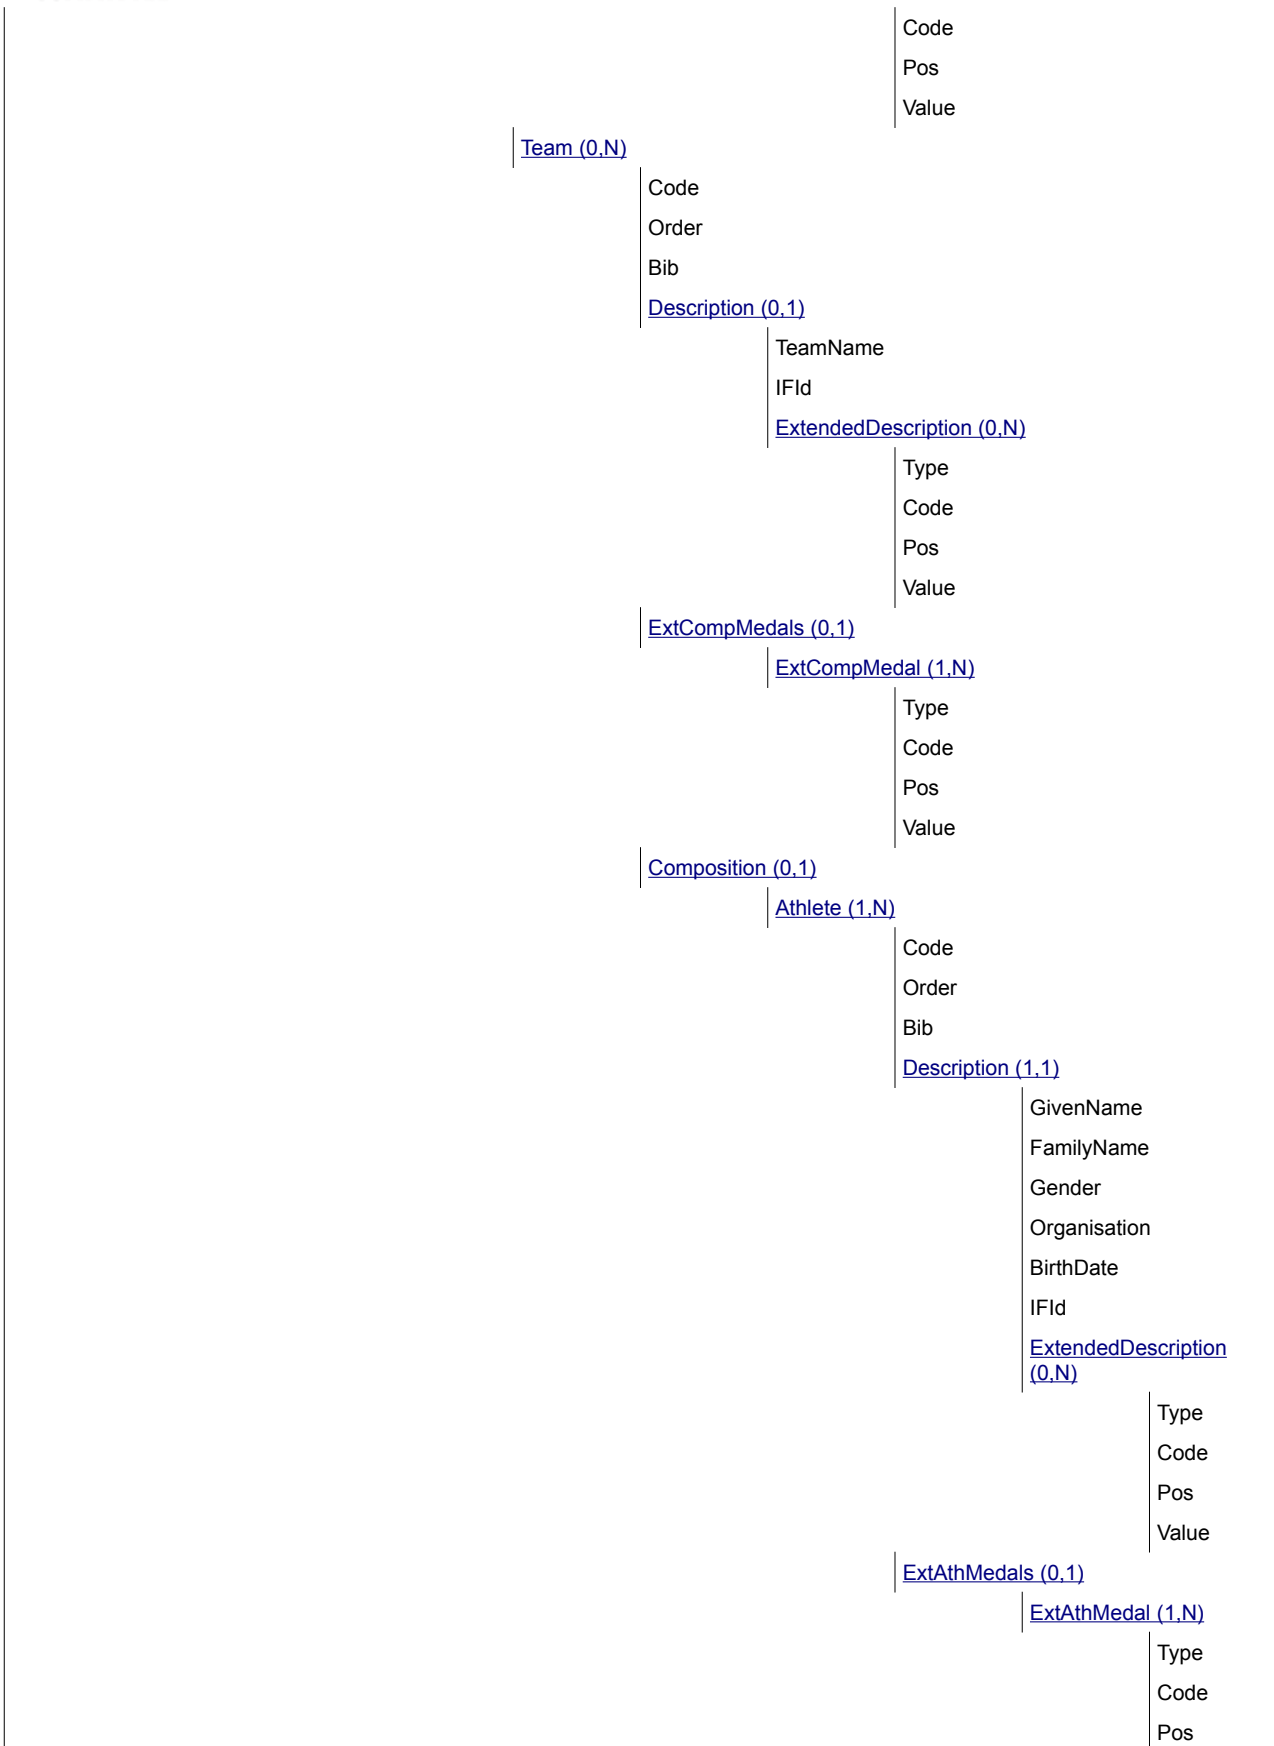

Value

### 2.1.18.5 Message Values

Element Competition (0,1)			
Attribute	M/O	Value	Description
Gen	O	S(20)	Version of the General Data Dictionary applicable to the message
Sport	O	S(20)	Version of the Sport Data Dictionary applicable to the message
Codes	O	S(20)	Version of the Codes applicable to the message

Element ExtendedInfos /ExtendedInfo (0,N)			
Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element ExtendedInfos /ExtendedInfo /Extension (0,N)			
Attribute	M/O	Value	Description
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element ExtendedInfos /SportDescription (0,1)			
Attribute	M/O	Value	Description
DisciplineName	M	S(40)	Discipline name (not code) from Common Codes
EventName	M	S(40)	Event name (not code) from Common Codes.
Gender	M	CC @SportGender	Gender code for the event unit.

Element ExtendedInfos /VenueDescription (0,1)			
Attribute	M/O	Value	Description
Venue	M	<a href="#">CC @VenueCode</a>	Venue Code
VenueName	M	S(25)	Venue Description (not code) from Common Codes

Element Medal (1,N)			
Attribute	M/O	Value	Description
Code	M	<a href="#">SC @MedalType</a>	Medal type.  All the Competitors with the same CC@MedalType are not grouped in the same element.
Unit	M	<a href="#">CC @Unit</a>	Full RSC Unit code in which a medal was awarded.  It is used in case of disciplines like Ice Hockey or Basketball, with the bronze medal and the gold medal awarded in different event units.
Date	M	Date	The date of the most recent unit in which a medal was





			determined for this event. That is, if only the bronze medal competitor has been determined then this is the date of the bronze medal unit. If all medals are determined then this is the date of the gold medal unit. It is the date of the unit, not the date of the awarding of the medal or the date of a later change in the medallists (that is it will not change [except in the case of a re-run], even if the medallists do)
--	--	--	---

Element Medal /Competitor (1,1)			
Attribute	M/O	Value	Description
Code	M	S(20) with no leading zeroes	Competitor's ID
Type	M	S(1)	A for athlete, T for team
Order	M	Numeric	Competitor order (Send 1 by default). In the case of tie the order is defined for the sport rules.
Bib	O	See table comment	Bib number, send if available (team bib)
Organisation	M	<a href="#">CC @Organisation</a>	Competitors' organisation

Table comment: Attribute to be set Mandatory from Optional or redefined. Refer to the ODF Sport Data Dictionary for each of the disciplines

Element Medal /Competitor /Description (0,1)			
Attribute	M/O	Value	Description
TeamName	M	S(73)	Name of the team. Only applies for teams / groups.
IFld	O	S(16)	Team IF number, send if available

Element Medal /Competitor /Description /ExtendedDescription (0,N)			
Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element Medal /Competitor /Officials /Official (1,N)			
Officials in the case there are officials receiving event's medals.			
Attribute	M/O	Value	Description
Code	M	S(20) with no leading zeroes	Official ID for the official code
Function	O	See table comment	Send official function
Order	O	See table comment	Send official order (if more than one official is needed). Send 1 if only one.

Table comment: Attribute to be set Mandatory from Optional or redefined. Refer to the ODF Sport Data Dictionary for each of the disciplines

Element Medal /Competitor /Officials /Official /Description (1,1)			
Attribute	M/O	Value	Description
GivenName	O	S(25)	Given name in WNPA format (mixed case)
FamilyName	M	S(25)	Family name in WNPA format (mixed case)
Gender	M	<a href="#">CC @PersonGender</a>	Gender Code



Nationality	M	<a href="#">CC @Country</a>	Coach's nationality
-------------	---	-----------------------------	---------------------

Element Medal /Competitor /Officials /Official /Description /ExtendedDescription (0,N)			
Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element Medal /Competitor /ExtCompMedals /ExtCompMedal (1,N)			
Team competitor's extended medals information, according to competitors' rules.			
Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element Medal /Competitor /Composition /Athlete (0,N)			
(Include all members that won the medal according to sport rules if Competitor @Type="T")			
Attribute	M/O	Value	Description
Code	M	S(20) with no leading zeroes	Athlete's ID, corresponding either to a team member or an individual athlete
Order	M	Numeric	Order of the team members in a team if Competitor @Type="T". 1 if Competitor @Type="A".
Bib	O	See table comment	Bib number, send if available (shirt number in a team)

Table comment: Attribute to be set Mandatory from Optional or redefined. Refer to the ODF Sport Data Dictionary for each of the disciplines

Element Medal /Competitor /Composition /Athlete /Description (1,1)			
Attribute	M/O	Value	Description
GivenName	O	S(25)	Given name in WNPA format (mixed case)
FamilyName	M	S(25)	Family name in WNPA format (mixed case)
Gender	M	<a href="#">CC @PersonGender</a>	Gender of the athlete
Organisation	M	<a href="#">CC @Organisation</a>	Athletes' organisation
BirthDate	O	Date	Birth date (example: YYYY-MM-DD). Must include if the data is available
IFId	O	S(16)	International Federation ID
Class	O	<a href="#">CC @DisplineClass</a>	Code to identify the sport class in the case of events with athletes with a disability (e.g: Paralympic Games). This attribute is optional because it is not used in events without such athletes.
Horse	O	S(25)	Name of the athlete's horse
GuideID	O	S(20) without leading zeros	ID of the Guide, used for some athletes with a disability (e.g: Paralympic Games).
GuideFamilyName	O	S(25)	Family Name of the athlete's guide (mixed case).
GuideGivenName	O	S(25)	Given Name of the athlete's guide (mixed case).



Element Medal /Competitor /Composition /Athlete /Description /ExtendedDescription (0,N)			
Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element Medal /Competitor /Composition /Athlete /ExtAthMedals /ExtAthMedal (1,N)			
Team member's or individual athlete's extended result, depending on whether Competitor @Type="T" or Competitor @Type="A" according to competitors' rules.			
Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element Medal /Competitor /Composition /Team (0,N)			
Only applicable in the case of team of teams.			
Attribute	M/O	Value	Description
Code	M	S(20) with no leading zeroes	Team's ID (example ATHM4X400m--ESP01, 393553) When the Team is an historical one, then this ID starts with "T".
Order	M	Numeric	Order of the teams if multiple teams else 1
Bib	O	See table comment	Bib number, send if available (team bib)

Element Medal /Competitor /Composition /Team /Description (0,1)			
Attribute	M/O	Value	Description
TeamName	M	S(73)	Name of the team. Only applies for teams / groups.
IFId	O	S(16)	Team IF number, send if available

Element Medal /Competitor /Composition /Team /Description /ExtendedDescription (0,N)			
Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element Medal /Competitor /Composition /Team /ExtCompMedals /ExtCompMedal (1,N)			
Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	



Element Medal /Competitor /Composition /Team /Composition /Athlete (1,N)			
Attribute	M/O	Value	Description
Code	M	S(20) with no leading zeroes	Athlete ID of the listed team's member. Therefore, he/she is a member of the team.
Order	O	Numeric	Team member order
Bib	O	See table comment	Bib number, send if available

Element Medal /Competitor /Composition /Team /Composition /Athlete /Description (1,1)			
Attribute	M/O	Value	Description
GivenName	O	S(25)	Given name in WNPA format (mixed case)
FamilyName	M	S(25)	Family name in WNPA format (mixed case)
Gender	M	<a href="#">CC @PersonGender</a>	Gender of the athlete
Organisation	M	<a href="#">CC @Organisation</a>	Athletes' organisation
BirthDate	O	Date	Birth date (example: YYYY-MM-DD). Must include if the data is available
IFId	O	S(16)	International Federation ID

Element Medal /Competitor /Composition /Team /Composition /Athlete /Description /ExtendedDescription (0,N)			
Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Table comment: Attribute to be set Mandatory from Optional or redefined. Refer to the ODF Sport Data Dictionary for each of the disciplines

Element Medal /Competitor /Composition /Team /Composition /Athlete /ExtAthMedals /ExtAthMedal (1,N)			
Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Table comment: Attribute to be set Mandatory from Optional or redefined. Refer to the ODF Sport Data Dictionary for each of the disciplines

### 2.1.18.6 Message Sort

The message is sorted according to the medal type. Moreover, in case of tie the order is according to the Competitor@Order (given by the sport rule). Team members are sorted according to the Athlete@Order.

## 2.1.19 Medallists by discipline

### 2.1.19.1 Description

The Medallists by discipline is a message containing the list of medallists for one discipline, up to the moment the message is generated.

The Medallists by discipline message is a complete message that increments its content as more medals are being awarded during the competition. The arrival of this message resets the entire previous Medallists by discipline information.

### 2.1.19.2 Header Values

The following table describes the message header attributes.

Attribute	Value	Comment
CompetitionCode	<a href="#">CC_@Competition</a>	Unique ID for competition
DocumentCode	<a href="#">CC_@Discipline</a>	Full RSC of the Discipline
DocumentType	DT_MEDALLISTS_DISCIPLIN E	Medallists by discipline
Version	1..V	Version number associated to the message's content. Ascendant number
FeedFlag	"P"-Production "T"-Test	Test message or production message.
Date	Date	Date when the message is generated, expressed in the local time zone where the message was produced.
Time	Time	Time up to milliseconds when the message is generated, expressed in the local time zone where the message was produced.
LogicalDate	Date	Logical Date of events. This is the same as the physical day except when the unit or message transmission extends after midnight. See full explanation in ODF Foundation.
Source	<a href="#">SC_@Source</a>	Code indicating the system which generated the message.

### 2.1.19.3 Trigger and Frequency


Medallists by Discipline message is sent as soon as one new medal is officially known (but not necessarily awarded) for any of the events that are part of the competition schedule. As the competition progresses, successive changes in the medallists by discipline information are made.


Trigger also after any change.

### 2.1.19.4 Message Structure

The following table defines the structure of the message.

Level 1	Level 2	Level 3	Level 4	Level 5	Level 6	Level 7	Level 8	Level 9	Level 10	Level 11	Level 12
<a href="#">Competition (0,1)</a>											
	Gen										
	Sport										
	Codes										
	<a href="#">ExtendedInfos (0,1)</a>										
		<a href="#">ExtendedInfo (0,N)</a>									
			Type								
			Code								

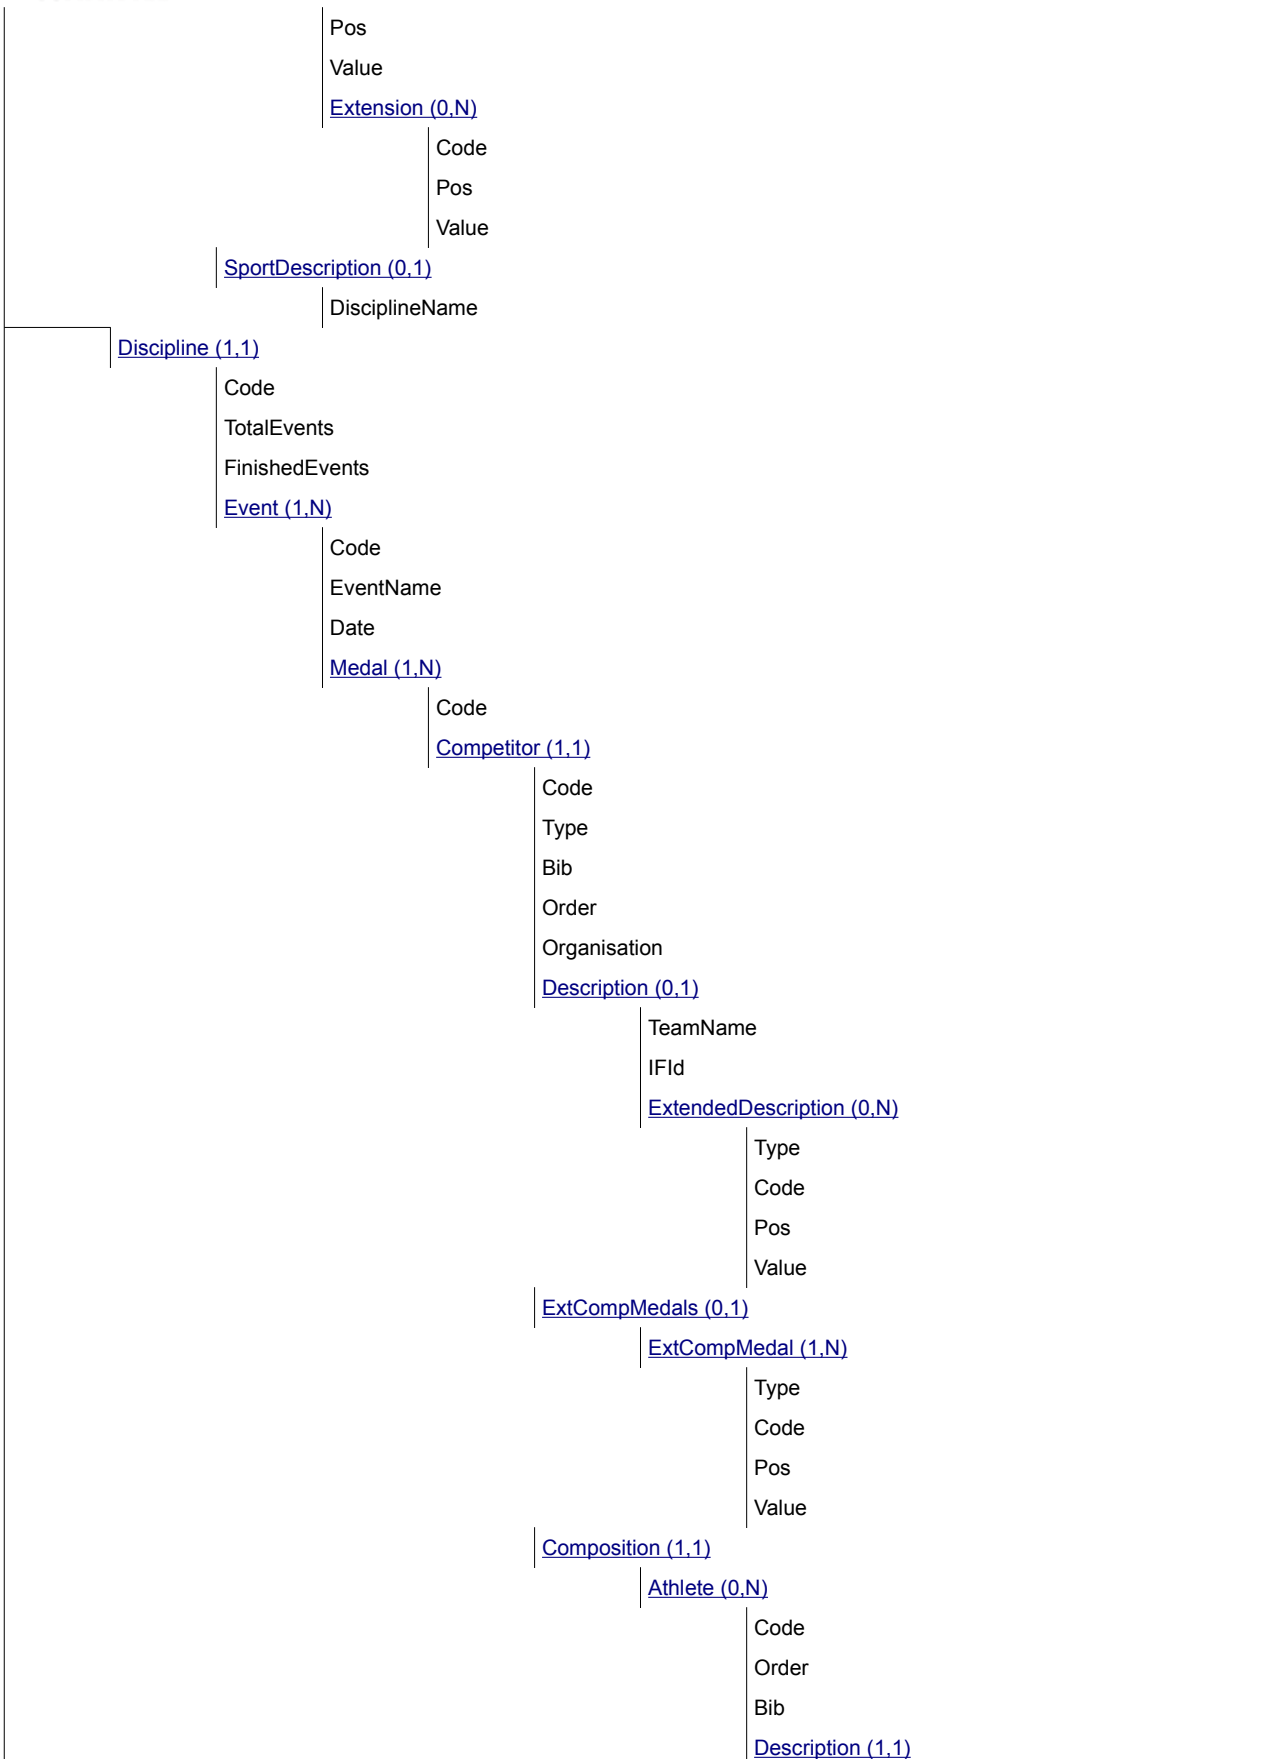

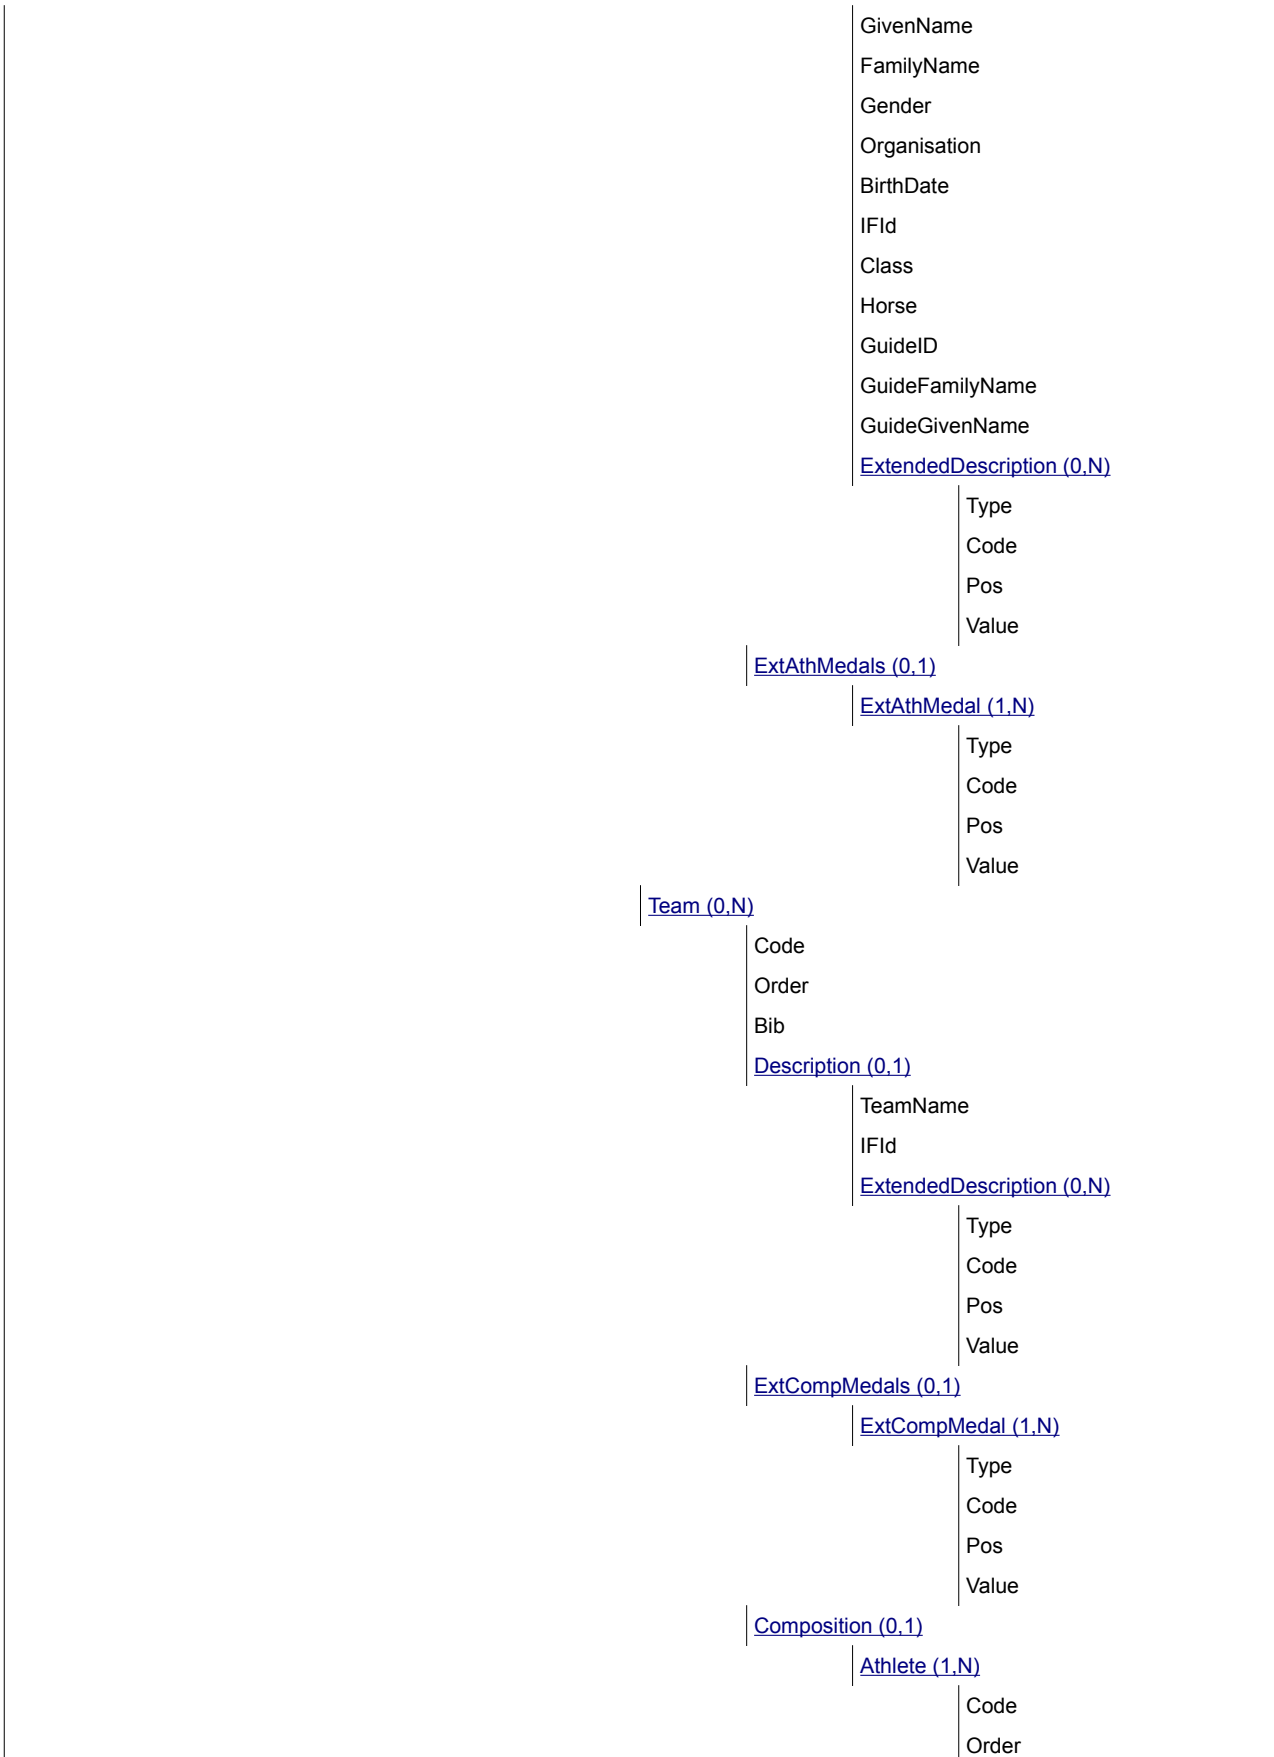



Bib	
<a href="#">Description (1,1)</a>	
GivenName	
FamilyName	
Gender	
Organisation	
BirthDate	
IFId	
<a href="#">ExtendedDescription (0,N)</a>	
Type	
Code	
Pos	
Value	
<a href="#">ExtAthMedals (0,1)</a>	
<a href="#">ExtAthMedal (1,N)</a>	
Type	
Code	
Pos	
Value	

### 2.1.19.5 Message Values

Element Competition (0,1)			
Attribute	M/O	Value	Description
Gen	O	S(20)	Version of the General Data Dictionary applicable to the message
Sport	O	S(20)	Version of the Sport Data Dictionary applicable to the message
Codes	O	S(20)	Version of the Codes applicable to the message

Element ExtendedInfos /ExtendedInfo (0,N)			
Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element ExtendedInfos /ExtendedInfo /Extension (0,N)			
Attribute	M/O	Value	Description
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element ExtendedInfos /SportDescription (0,1)			
---	--	--	--





Sport Description in Text			
Attribute	M/O	Value	Description
DisciplineName	M	S(40)	Discipline name (not code) from Common Codes

Element Discipline (1,1)			
Discipline information			
Attribute	M/O	Value	Description
Code	M	<a href="#">CC @Discipline</a>	Full RSC Discipline Code
TotalEvents	M	Numeric	Total number of competition events (events that award medals)
FinishedEvents	M	Numeric	Number of competition events that have awarded any type of medal, out of the total. In case of sports with 2 matches have medals (Bronze and Gold), this attribute only counts when the Gold medal has been awarded (not counted for Bronze because the event has not finished yet).

Element Discipline /Event (1,N)			
Event information			
Attribute	M/O	Value	Description
Code	M	<a href="#">CC @Event</a>	Full RSC of the Event
EventName	M	S(40)	Event name (not code) from Common Codes
Date	M	YYYY-MM-DD	Date of the Gold medal match.

Element Discipline /Event /Medal (1,N)			
Attribute	M/O	Value	Description
Code	M	<a href="#">SC @MedalType</a>	Medal type gold, silver or bronze. All the Competitors with the same CC@MedalType must not be grouped in the same element (it applies in the equalled medals)

Element Discipline /Event /Medal /Competitor (1,1)			
Competitor related to the medals.			
Attribute	M/O	Value	Description
Code	M	S(20) with no leading zeroes	Competitor's ID
Type	M	S(1)	A for Athlete, T for Team
Bib	O	See table comment	Bib number, send if available (team bib)
Order	M	Numeric	Competitor order (Send 1 by default) and in the case of tie the order will be defined by the IOC rules.
Organisation	M	<a href="#">CC @Organisation</a>	Competitors' organisation

Table comment: Attribute to be set Mandatory from Optional or redefined. Refer to the ODF Sport Data Dictionary for each of the disciplines

Element Discipline /Event /Medal /Competitor /Description (0,1)			
Attribute	M/O	Value	Description
TeamName	M	S(73)	Name of the team. Only applies for teams / groups.
IFId	O	S(16)	Team IF number, send if available



Element Discipline /Event /Medal /Competitor /Description /ExtendedDescription (0,N)			
Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element Discipline /Event /Medal /Competitor /ExtCompMedals /ExtCompMedal (1,N)			
Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element Discipline /Event /Medal /Competitor /Composition /Athlete (0,N)			
Attribute	M/O	Value	Description
Code	M	S(20) with no leading zeroes	Individual athlete's ID (if Competitor @Type="A" or team member's ID (if Competitor @Type="T").
Order	M	Numeric	Team member order for medal (according to each different sport rule). Send 1 if individual medal
Bib	O	See table comment	Bib number, send if available (shirt number in a team)

Table comment: Attribute to be set Mandatory from Optional or redefined. Refer to the ODF Sport Data Dictionary for each of the disciplines

Element Discipline /Event /Medal /Competitor /Composition /Athlete /Description (1,1)			
Attribute	M/O	Value	Description
GivenName	O	S(25)	Given name in WNPA format (mixed case)
FamilyName	M	S(25)	Family name in WNPA format (mixed case)
Gender	M	<a href="#">CC @PersonGender</a>	Gender of the athlete
Organisation	M	<a href="#">CC @Organisation</a>	Athletes' organisation
BirthDate	O	Date	Birth date (example: YYYY-MM-DD). Must include if the data is available
IFId	O	S(16)	International Federation ID
Class	O	CC @DisplineClass	Code to identify the sport class in the case of events with athletes with a disability (e.g: Paralympic Games). This attribute is optional because it is not used in events without such athletes.
Horse	O	S(25)	Name of the athlete's horse
GuideID	O	S(20) without leading zeros	ID of the Guide, used for some athletes with a disability (e.g: Paralympic Games).
GuideFamilyName	O	S(25)	Family Name of the athlete's guide (mixed case).
GuideGivenName	O	S(25)	Given Name of the athlete's guide (mixed case).

Element Discipline /Event /Medal /Competitor /Composition /Athlete /Description /ExtendedDescription (0,N)			
Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	



Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element Discipline /Event /Medal /Competitor /Composition /Athlete /ExtAthMedals /ExtAthMedal (1,N)			
Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element Discipline /Event /Medal /Competitor /Composition /Team (0,N)			
Only applicable in the case of team of teams			
Attribute	M/O	Value	Description
Code	M	S(20) with no leading zeroes	Team's ID (example ATHM4X400m--ESP01, 393553) When the Team is an historical one, then this ID starts with "T".
Order	M	Numeric	Order of the teams if multiple teams else 1
Bib	O	See table comment	Bib number, send if available (team bib).

Element Discipline /Event /Medal /Competitor /Composition /Team /Description (0,1)			
Attribute	M/O	Value	Description
TeamName	M	S(73)	Name of the team. Only applies for teams / groups.
IFId	O	S(16)	Team IF number, send if available

Element Discipline /Event /Medal /Competitor /Composition /Team /Description /ExtendedDescription (0,N)			
Attribute	M/O	Value	Description
Type	M	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element Discipline /Event /Medal /Competitor /Composition /Team /ExtCompMedals /ExtCompMedal (1,N)			
Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element Discipline /Event /Medal /Competitor /Composition /Team /Composition /Athlete (1,N)			
Attribute	M/O	Value	Description
Code	M	S(20) with no leading zeroes	Athlete's ID of the listed team's member. Therefore, he/she is part of the team.
Order	O	Numeric	Team member order
Bib	O	See table comment	Bib number, send if available



Element Discipline /Event /Medal /Competitor /Composition /Team /Composition /Athlete /Description (1,1)			
Attribute	M/O	Value	Description
GivenName	O	S(25)	Given name in WNPA format (mixed case)
FamilyName	M	S(25)	Family name in WNPA format (mixed case)
Gender	M	<a href="#">CC @PersonGender</a>	Gender of the athlete
Organisation	M	<a href="#">CC @Organisation</a>	Athletes' organisation
BirthDate	O	Date	Birth date (example: YYYY-MM-DD). Must include if the data is available
IFId	O	S(16)	International Federation ID

Element Discipline /Event /Medal /Competitor /Composition /Team /Composition /Athlete /Description /ExtendedDescription (0,N)			
Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element Discipline /Event /Medal /Competitor /Composition /Team /Composition /Athlete /ExtAthMedals /ExtAthMedal (1,N)			
Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

### 2.1.19.6 Message Sort

Events in the message will be sorted by the chronological order in which the events took place, (the time is considered to be the time of the gold medal) unit followed by medal order (gold, silver, bronze) and then by the official result order.

## 2.1.20 Configuration

### 2.1.20.1 Description

The Configuration is a message containing general configuration.

Ideally the configuration should be provided before competition. However it may be possible that the configuration for one particular event, phase or event unit is not known in advance. In that case send the unknown attributes blank (Value="").

### 2.1.20.2 Header Values

The following table describes the message header attributes.

Attribute	Value	Comment
CompetitionCode	<a href="#">CC_@Competition</a>	Unique ID for competition
DocumentCode	Full RSC	Each ODF Sport Data Dictionary will have to update the definition of this attribute
DocumentType	DT_CONFIG	Configuration message
Version	1..V	Version number associated to the message's content. Ascendant number
FeedFlag	"P"-Production "T"-Test	Test message or production message.
Date	Date	Date when the message is generated, expressed in the local time zone where the message was produced.
Time	Time	Time up to milliseconds when the message is generated, expressed in the local time zone where the message was produced.
LogicalDate	Date	Logical Date of events. This is the same as the physical day except when the unit or message transmission extends after midnight. See full explanation in ODF Foundation.
Source	<a href="#">SC_@Source</a>	Code indicating the system which generated the message.

### 2.1.20.3 Trigger and Frequency

The message is sent prior to any ODF Sports message, if requested by one particular discipline (ODF Sport Data Dictionary).


Depending on the data required in this message (sport by sport) the sport data dictionary may add or modify the triggering requirements.

Trigger also after any major change, but considering that, if possible, the configuration for one particular event, phase or event unit must be provided before the start list. If a DT\_CONFIG message is sent after a DT\_RESULT in a related unit then the next version of DT\_RESULT must be sent immediately.

### 2.1.20.4 Message Structure

The following table defines the structure of the message.

Level 1	Level 2	Level 3	Level 4	Level 5	Level 6
<a href="#">Competition (0.1)</a>					
	Gen				
	Sport				
	Codes				

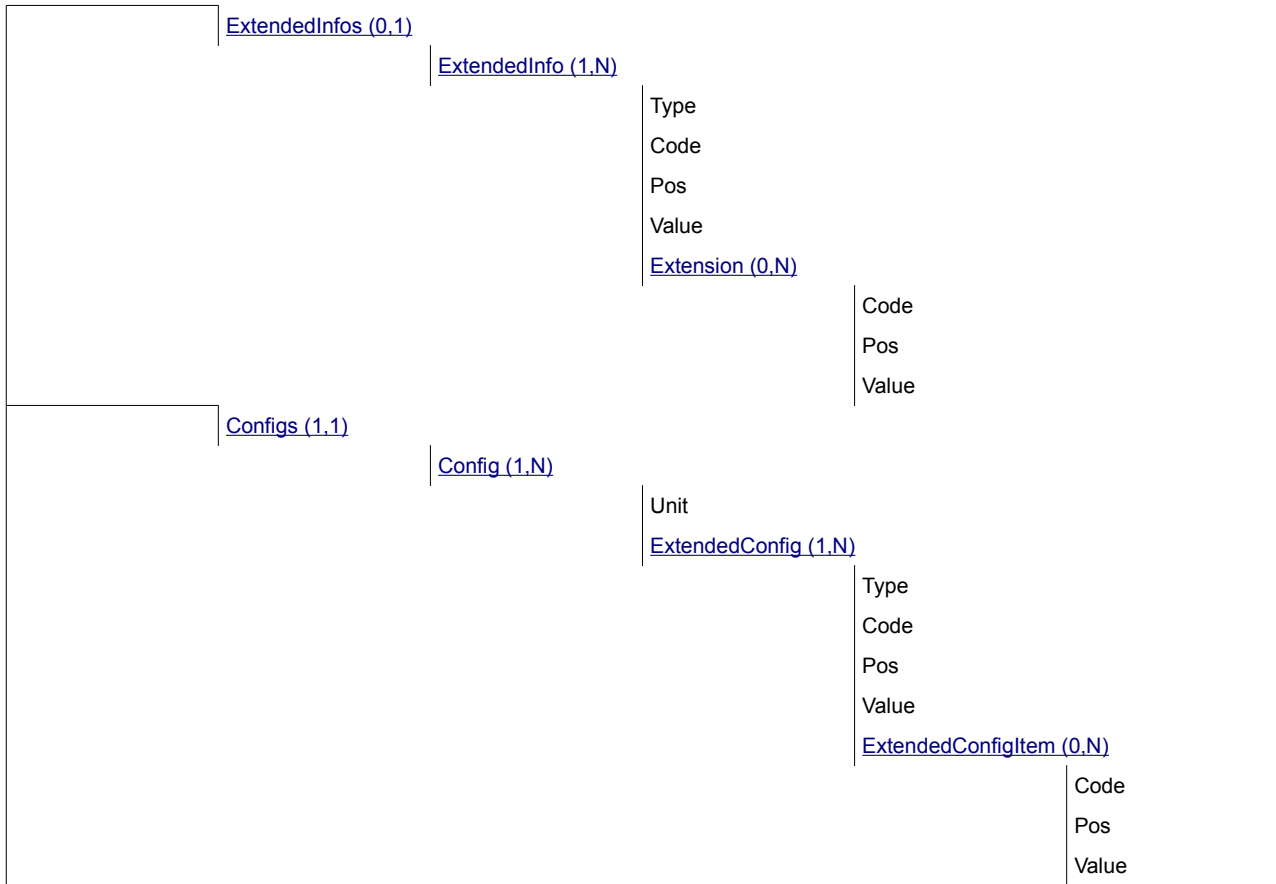

### 2.1.20.5 Message Values

Element Competition (0,1)			
Attribute	M/O	Value	Description
Gen	O	S(20)	Version of the General Data Dictionary applicable to the message
Sport	O	S(20)	Version of the Sport Data Dictionary applicable to the message
Codes	O	S(20)	Version of the Codes applicable to the message

Element ExtendedInfos /ExtendedInfo (1,N)			
Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element ExtendedInfos /ExtendedInfo /Extension (0,N)			
Attribute	M/O	Value	Description
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element Configs /Config (1,N)			
Attribute	M/O	Value	Description
Unit	M	<a href="#">CC @Unit</a>	Full RSC of the Unit. Can be at gender, phase or unit level (do not send if at discipline level).

Table comment: Attribute to be set Mandatory from Optional or redefined. Refer to the ODF Sport Data Dictionary for each of the disciplines

Element Configs /Config /ExtendedConfig (1,N)			
Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Table comment: Attribute to be set Mandatory from Optional or redefined. Refer to the ODF Sport Data Dictionary for each of the disciplines

Element Configs /Config /ExtendedConfig /ExtendedConfigItem (0,N)			
Attribute	M/O	Value	Description
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Table comment: Attribute to be set Mandatory from Optional or redefined. Refer to the ODF Sport Data Dictionary for each of the disciplines

### 2.1.20.6 Message Sort

There is no general message sorting rule.

## 2.1.21 Communication

### 2.1.21.1 Description

The Communication message contains a release of a Communication, which may be an Official Communication, Sport Communication or similar, which contains jury decisions, competition management decisions, etc.

Communications are numbered by sport separately, not globally.

### 2.1.21.2 Header Values

The following table describes the message header attributes.

Attribute	Value	Comment
CompetitionCode	<a href="#">CC @Competition</a>	Unique ID for competition
DocumentCode	<a href="#">CC @Discipline</a>	Full RSC of the Discipline
DocumentSubcode	Numeric	This is the Communication number. Send incremental number in the case that DocumentSubtype is NOTICE, SPORT_NOTICE, COMPETITOR_NOTICE or PROTEST (one for each different Item) unless defined differently by sport.
DocumentType	DT_COMMUNICATION	Official communication message
DocumentSubtype	NOTICE SPORT_NOTICE COMPETITOR_NOTICE PROTEST ON_WATER LIMIT	* NOTICE: Used for Official Communications (all sports) * SPORT_NOTICE: Used for Sport Communications (all sports) * COMPETITOR_NOTICE: For notifications to competitors, (only golf) * PROTEST: Protest type (Except protest by Rule 42), (only sailing) * ON_WATER: On the water Penalties (only sailing) * LIMIT: Protest Time Limit (only sailing)
Version	1..V	Version number associated to the message's content. Ascendant number
FeedFlag	"P"-Production "T"-Test	Test message or production message.
Date	Date	Date when the message is generated, expressed in the local time zone where the message was produced.
Time	Time	Time up to milliseconds when the message is generated, expressed in the local time zone where the message was produced.
LogicalDate	Date	Logical Date of events. This is the same as the physical day except when the unit or message transmission extends after midnight. See full explanation in ODF Foundation.
Source	<a href="#">SC @Source</a>	Code indicating the system which generated the message.

### 2.1.21.3 Trigger and Frequency

The message should be generated as soon as the information is available.

Trigger also after any change.

### 2.1.21.4 Message Structure

The following table defines the structure of the message.

Level 1	Level 2	Level 3	Level 4	Level 5	Level 6	Level 7
<a href="#">Competition (0.1)</a>						
	Gen					
	Sport					
	Codes					
	<a href="#">ExtendedInfos (0.1)</a>					





	<a href="#">ExtendedInfo (0..N)</a>	Type	
		Code	
		Pos	
		Value	
		<a href="#">Extension (0..N)</a>	
			Code
			Pos
			Value
	<a href="#">SportDescription (0..1)</a>	DisciplineName	
		EventName	
		SubEventName	
		Gender	
	<a href="#">VenueDescription (0..1)</a>	Venue	
		VenueName	
		Location	
		LocationName	
	<a href="#">Communication (1..1)</a>		
		PublishTime	
		<a href="#">Decision (0..1)</a>	
		ItemNum	
		IssuedTime	
		AffectsRES	
		AffectsSCH	
		AffectsOTH	
		Unit	
		<a href="#">Subtitle (0..1)</a>	
			-
		<a href="#">Summary (0..1)</a>	
			-
		<a href="#">Details (0..1)</a>	
			-
		<a href="#">IssuedBy (0..1)</a>	
			-
		<a href="#">SignedBy (0..2)</a>	
			Code
			FamilyName
			GivenName
			Function
			Order
		<a href="#">ExtendedComms (0..1)</a>	
			<a href="#">ExtendedComm (1..N)</a>



		Type	
		Code	
		Pos	
		Value	
		<a href="#">Extension (0.N)</a>	
			Code
			Pos
			Value
	<a href="#">Protest (0.1)</a>		
		Status	
		HearingTime	
		DecisionTime	
		Protestor	
		Protestee	
		Witness	
		Interpreter	
		Rule	
		Unit	
		<a href="#">Type (0.1)</a>	
			-
		<a href="#">Details (0.1)</a>	
			-
		<a href="#">DecisionShort (0.1)</a>	
			-
		<a href="#">DecisionLong (0.1)</a>	
			-
		<a href="#">Description (0.1)</a>	
			-
		<a href="#">FactsFound (0.1)</a>	
			-
		<a href="#">Conclusion (0.1)</a>	
			-
		<a href="#">Jury (1.N)</a>	
			Code
			FamilyName
			GivenName
			Order
		<a href="#">SignedBy (0.1)</a>	
			Code
			FamilyName
			GivenName
			Function
	<a href="#">ImageData (0.1)</a>		
			-



### 2.1.21.5 Message Values

Element Competition (0,1)			
Attribute	M/O	Value	Description
Gen	O	S(20)	Version of the General Data Dictionary applicable to the message
Sport	O	S(20)	Version of the Sport Data Dictionary applicable to the message
Codes	O	S(20)	Version of the Codes applicable to the message

Element ExtendedInfos /ExtendedInfo (0,N)			
Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element ExtendedInfos /ExtendedInfo /Extension (0,N)			
Attribute	M/O	Value	Description
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element ExtendedInfos /SportDescription (0,1)			
Sport Description in Text			
Attribute	M/O	Value	Description
DisciplineName	M	S(40)	Discipline name from Common Codes
EventName	O	S(40)	Event name from Common Codes
SubEventName	O	S(40)	EventUnit short name (not code) from Common Codes. Only include if single unit affected
Gender	O	CC @SportGender	Gender code for the event unit

Element ExtendedInfos /VenueDescription (0,1)			
Venue Names in text.			
Attribute	M/O	Value	Description
Venue	M	<a href="#">CC @VenueCode</a>	Venue code
VenueName	M	S(25)	Venue Description (not code) from Common Codes
Location	O	<a href="#">CC @Location</a>	Location Code
LocationName	O	S(30)	Location Description (not code) from Common Codes

Element Communication (1,1)			
Attribute	M/O	Value	Description
PublishTime	M	DateTime	Date and time in which the communication is published. Example: 2006-02-26T10:00:00+01:00



**Element Communication /Decision (0,1)**

**Mandatory for DocumentSubtype NOTICE, COMPETITOR\_NOTICE and SPORT\_NOTICE.**

The DocumentSubtype is always NOTICE, COMPETITOR\_NOTICE or SPORT\_NOTICE, except for Sailing where it is redefined in the ODF Sport Data Dictionary document.

Attribute	M/O	Value	Description
ItemNum	O	String See table comment	Sport dependent, item number if applicable
IssuedTime	O	DateTime	Decision date and time. (Mandatory in the case of NOTICE, SPORT_NOTICE, COMPETITOR_NOTICE)  Example: 2006-02-26T10:00:00+01:00
AffectsRES	O	Y, N	'Y' - The jury decision affects the results 'N' - The jury decision does not affect the results Mandatory in the case of DocumentSubtype is NOTICE
AffectsSCH	O	Y, N	'Y' - The jury decision affects the schedules 'N' - The jury decision does not affect the schedules Mandatory in the case of DocumentSubtype is NOTICE
AffectsOTH	O	Y, N	'Y' - The jury decision affects other areas 'N' - The jury decision does not affect other areas Mandatory in the case of DocumentSubtype is NOTICE
Unit	O	<a href="#">CC @Unit</a>	Full Unit RSC Sent if the official communication applies to the gender, event, phase, or unit level. (can be at any level)

Table comment: Attribute to be set Mandatory from Optional or redefined. Refer to the ODF Sport Data Dictionary for each of the disciplines

**Element Communication /Decision /Subtitle (0,1)**

Attribute	M/O	Value	Description
-	M	Free Text	Communication Subtitle. It is the title placed in the ORIS report next to "Official Communication"

**Element Communication /Decision /Summary (0,1)**

Attribute	M/O	Value	Description
-	M	Free Text	Summary of the communication. Should contain the event description.

**Element Communication /Decision /Details (0,1)**

Attribute	M/O	Value	Description
-	M	Free Text	Body of the communication. Include the description.

**Element Communication /Decision /IssuedBy (0,1)**

Attribute	M/O	Value	Description
-	M	Free Text	Communication author

**Element Communication /Decision /SignedBy (0,2)**

Attribute	M/O	Value	Description
Code	O	S(20) with no leading	ID of the Signed Name, to uniquely identify this element



		zeroes	
FamilyName	O	S(25)	Family name of the person associated to the sign
GivenName	O	S(25)	Given name of the person associated to the sign
Function	M	S(30)	Decision of the Function of the Signed person
Order	M	Numeric	Send official order

Element Communication /Decision /ExtendedComms /ExtendedComm (1,N)			
Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element Communication /Decision /ExtendedComms /ExtendedComm /Extension (0,N)			
Attribute	M/O	Value	Description
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element Communication /Protest (0,1)			
Attribute	M/O	Value	Description
Status	M	<a href="#">SC @ProtestStatus</a>	Status of protest
HearingTime	O	DateTime	Hearing time Example: 2012-07-26T10:00:00+01:00
DecisionTime	O	DateTime	Protest Decision Time Example: 2012-07-26T10:00:00+01:00
Protestor	O	Free text	
Protestee	O	Free text	
Witness	O	Free text	
Interpreter	M	Y or N	Interpreter required
Rule	M	String	Rule applicable
Unit	O	<a href="#">CC @Unit</a>	Full RSC at unit level Sent if the protest applies to the gender, event, phase, or unit level. (can be at any level)

Element Communication /Protest /Type (0,1)			
Attribute	M/O	Value	Description
-	O	Free text	Type of protest. Denotes the different options.

Element Communication /Protest /Details (0,1)			
Attribute	M/O	Value	Description
-	M	Free text	Protest details



Element Communication /Protest /DecisionShort (0,1)			
Attribute	M/O	Value	Description
-	M	Free text	Decision short

Element Communication /Protest /DecisionLong (0,1)			
Attribute	M/O	Value	Description
-	M	Free text	Decision

Element Communication /Protest /Description (0,1)			
Attribute	M/O	Value	Description
-	O	Free text	Description of the incident

Element Communication /Protest /FactsFound (0,1)			
Attribute	M/O	Value	Description
-	M	Free text	Facts Found

Element Communication /Protest /Conclusion (0,1)			
Attribute	M/O	Value	Description
-	O	Free text	Conclusion

Element Communication /Protest /Jury (1,N)			
Attribute	M/O	Value	Description
Code	O	S(20) with no leading zeroes	Official ID
FamilyName	O	S(25)	Family name of the Jury
GivenName	O	S(25)	Given name of the Jury
Order	O	Numeric	Order of the official, if more than one official. Send 1 if only one.

Element Communication /Protest /SignedBy (0,1)			
Attribute	M/O	Value	Description
Code	O	S(20) with no leading zeroes	Key of the Signed Name, to uniquely identify this element
FamilyName	O	S(25)	Family name of the person associated to the sign
GivenName	O	S(25)	Given name of the person associated to the sign
Function	M	<a href="#">CC @ResultsFunction</a>	Function of the Signed person

Element Communication /ImageData (0,1)			
Attribute	M/O	Value	Description
-	M	Text	The ImageData element contains a body consisting of one Base64-encoded PNG or JPG file.

### 2.1.21.6 Message Sort

There are no specific sorting requirements

## 2.1.22 Federation Ranking

### 2.1.22.1 Description

The Federation Ranking is a message containing the rankings in a discipline. The rankings may be over the whole discipline or divided by event as appropriate for the discipline. One message may contain a single event or multiple events.

Rankings may be based on some points system and updated at fixed points or based on single performances and updated with each new performance.

Rankings may be for a fixed period, for example a calendar year or be taken over a rolling period.

### 2.1.22.2 Header Values

The following table describes the message header attributes.

Attribute	Value	Comment
CompetitionCode	<a href="#">CC @Competition</a>	Unique ID for competition
DocumentCode	Full RSC	Full RSC code. -If the message contains data for only one event then the RSC will be at event level. -If the message includes ranking for more than one event (Rankings appears multiple times) then the document code will be at discipline level. -If the message includes ranking for more than one event in a single gender (Rankings appears multiple times) then the document code will be at discipline gender level.
DocumentSubcode	S(34)	Provides greater granularity for document if DocumentCode is not sufficient.
DocumentType	DT_FED_RANKING	Federation ranking message
DocumentSubtype	S(20)	Federation Ranking type. To be defined in each ODF Data Dictionary as needed.
Version	1..V	Version number associated to the message's content. Ascendant number
FeedFlag	"P"-Production "T"-Test	Test message or production message.
Date	Date	Date when the message is generated, expressed in the local time zone where the message was produced.
Time	Time	Time up to milliseconds when the message is generated, expressed in the local time zone where the message was produced.
LogicalDate	Date	Logical Date of events. This is the same as the physical day except when the unit or message transmission extends after midnight. See full explanation in ODF Foundation.
Source	<a href="#">SC @Source</a>	Code indicating the system which generated the message.


### 2.1.22.3 Trigger and Frequency

Triggers in rankings are usually manual as the ranking may be distributed when updates are complete from multiple competitions or at fixed points in time. As a result each discipline defines its own triggers.


### 2.1.22.4 Message Structure


The following table defines the structure of the message.

Level 1	Level 2	Level 3	Level 4	Level 5	Level 6	Level 7	Level 8	Level 9
---------	---------	---------	---------	---------	---------	---------	---------	---------

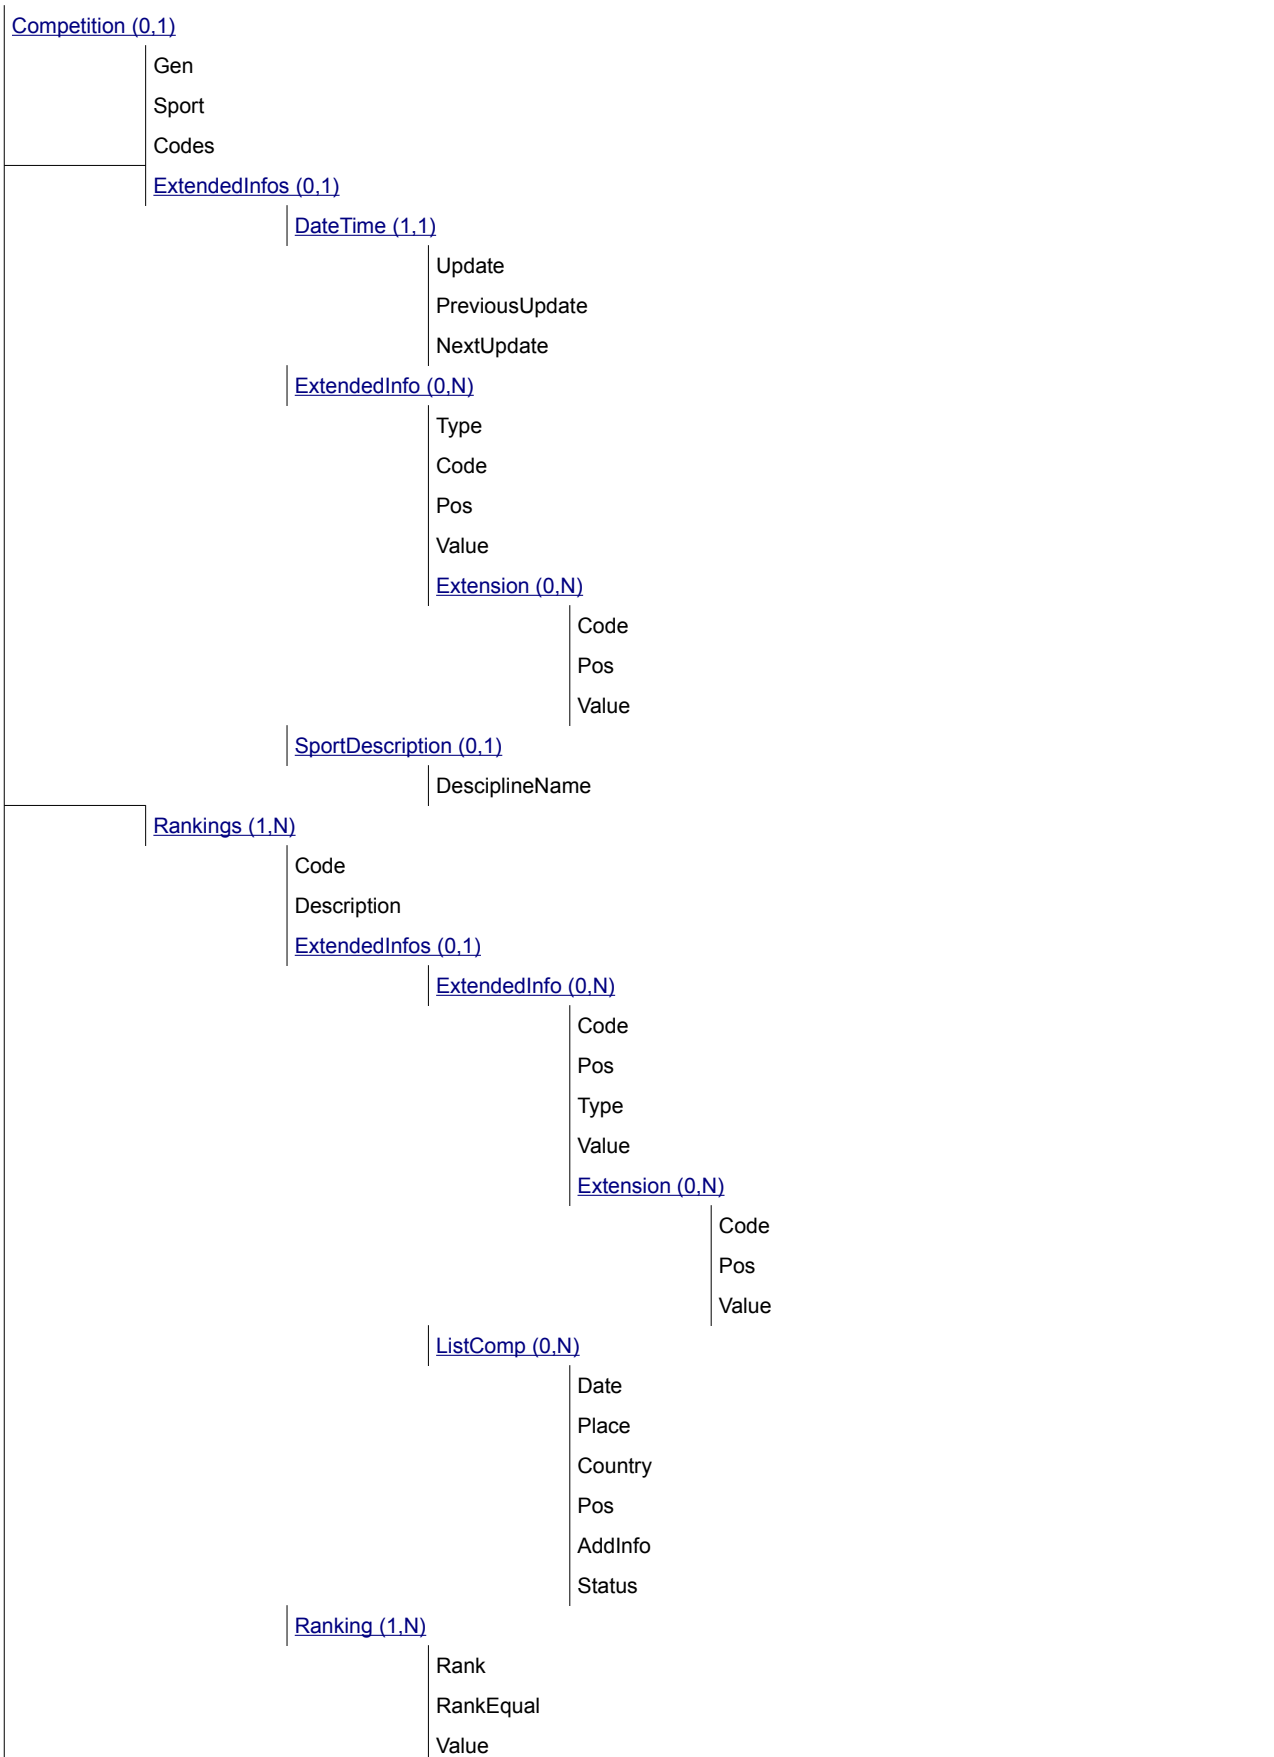



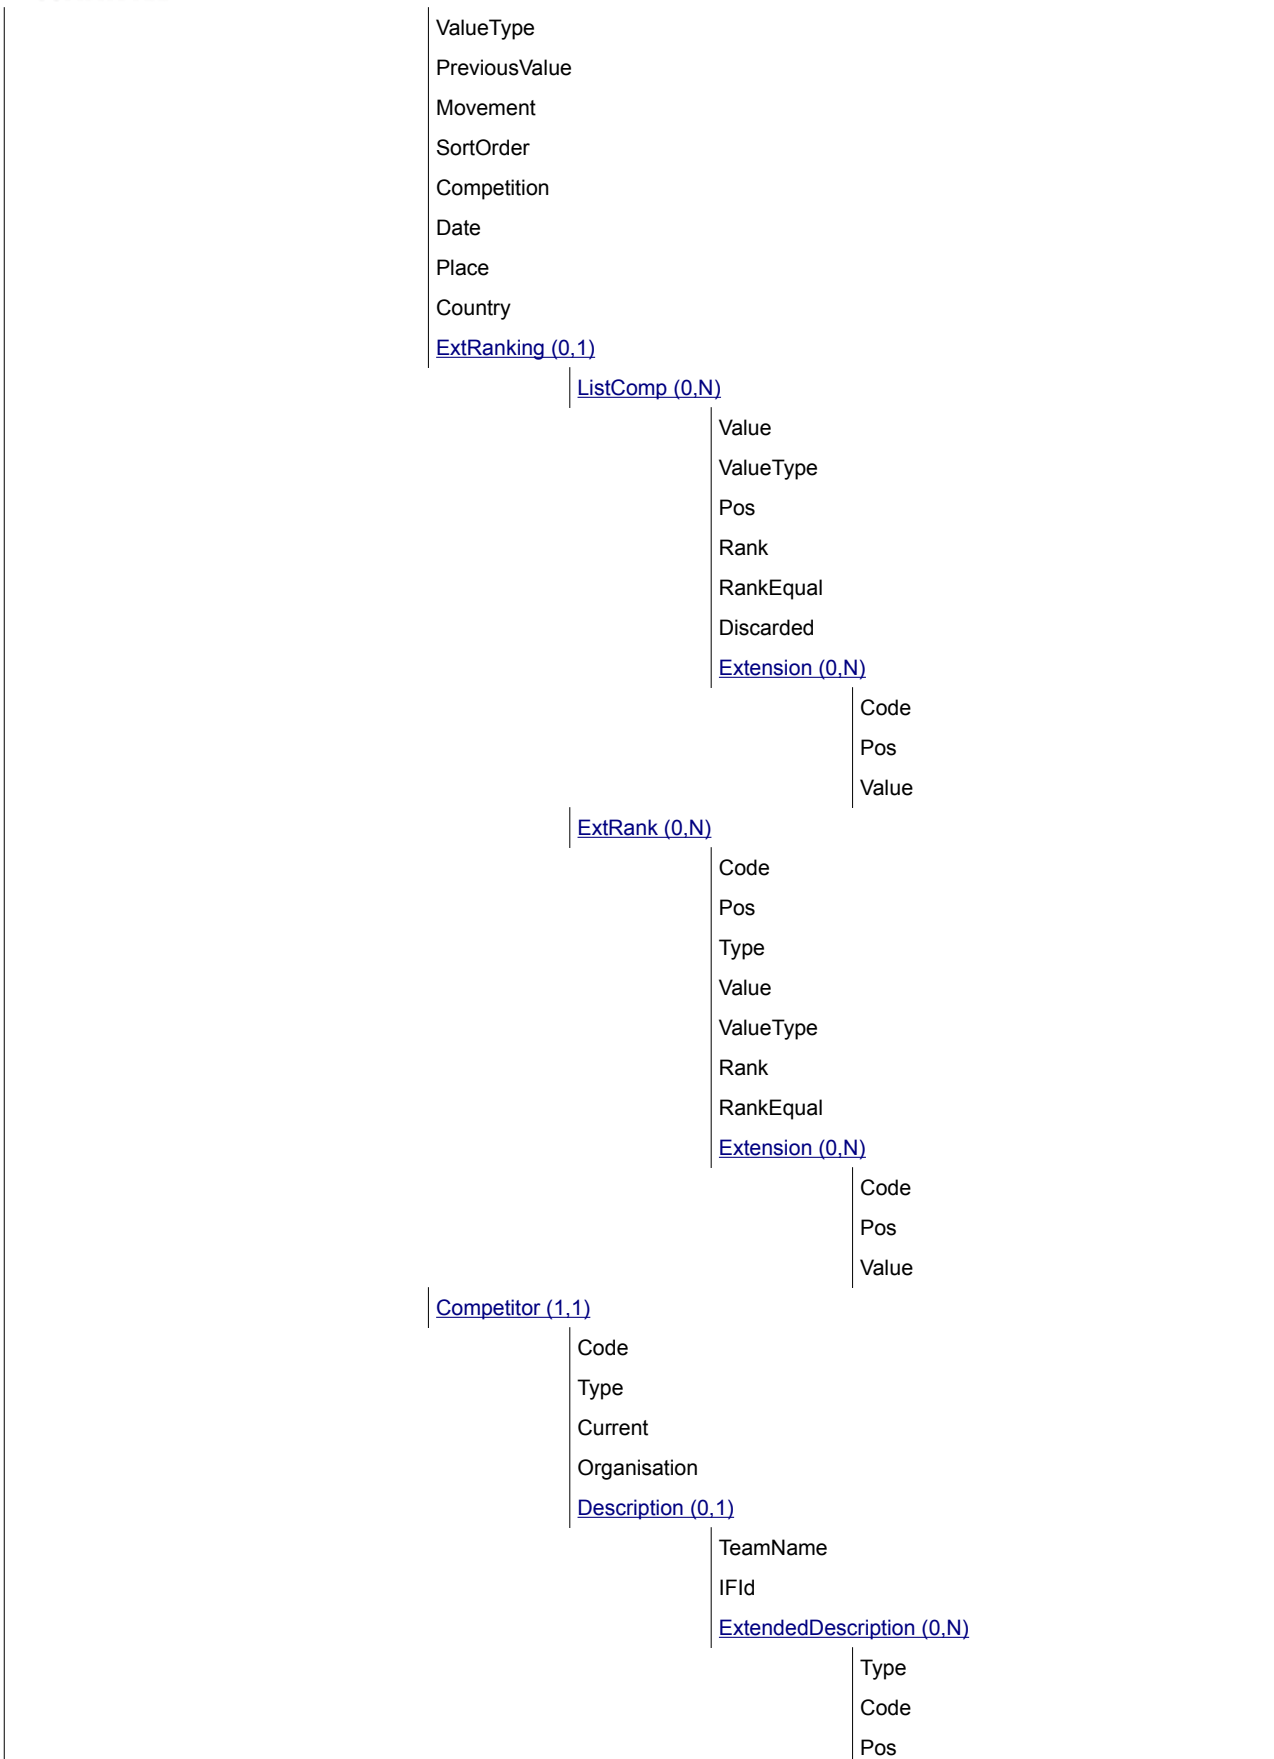

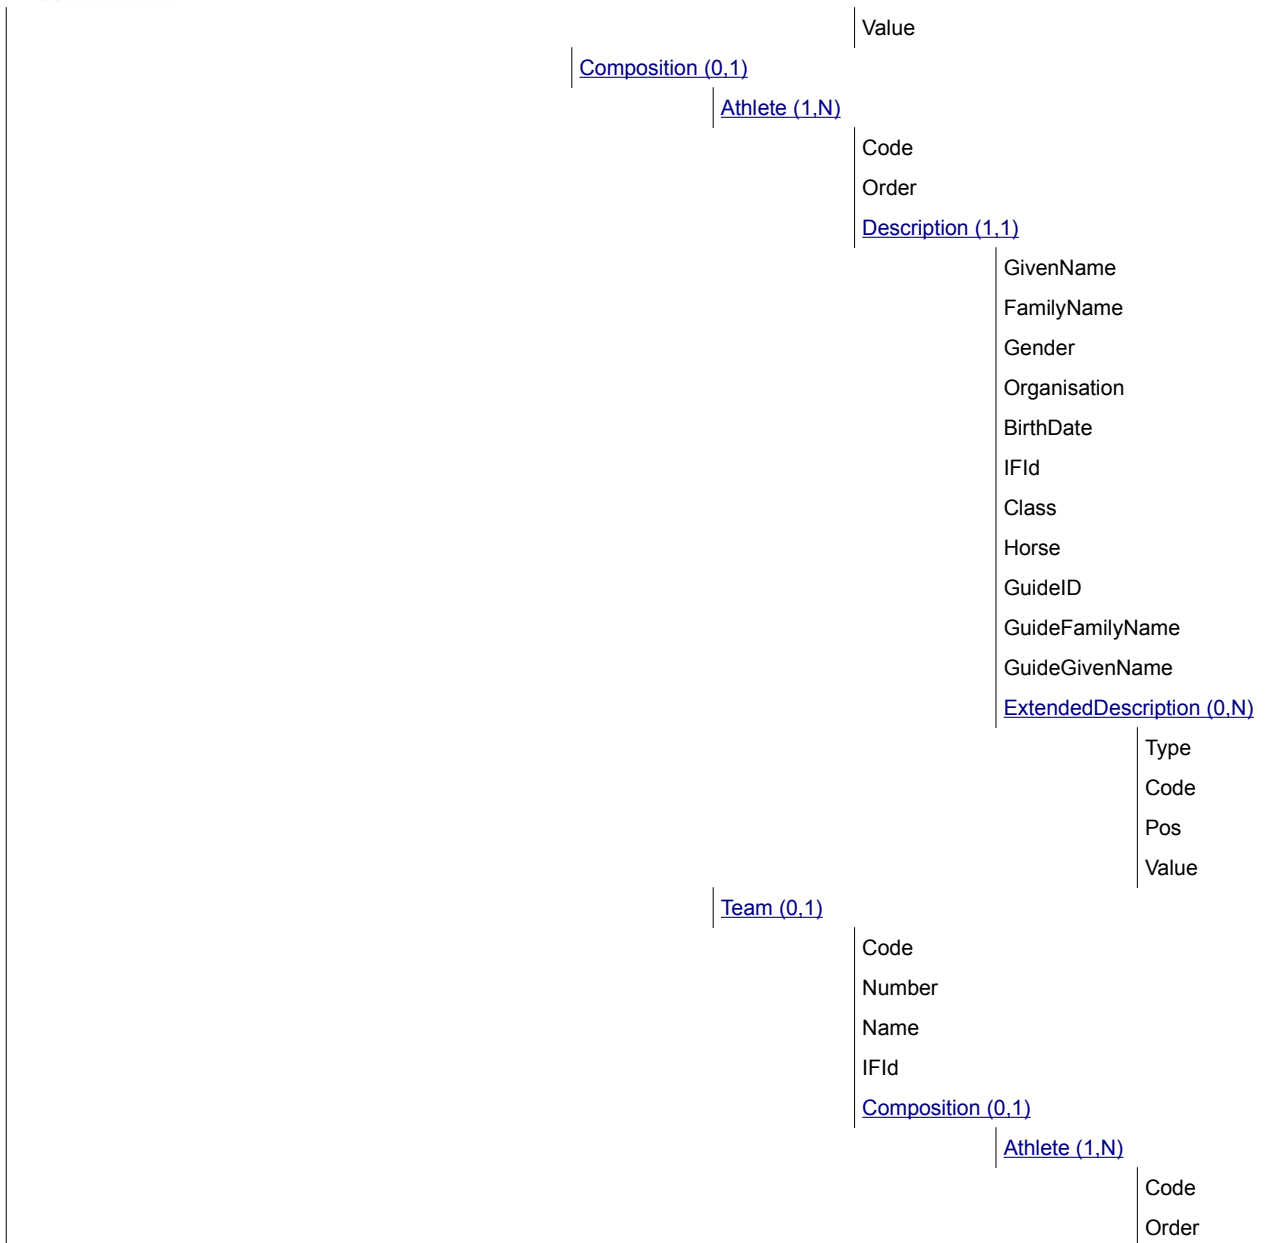

### 2.1.22.5 Message Values

Element Competition (0,1)			
Attribute	M/O	Value	Description
Gen	O	S(20)	Version of the General Data Dictionary applicable to the message
Sport	O	S(20)	Version of the Sport Data Dictionary applicable to the message
Codes	O	S(20)	Version of the Codes applicable to the message

Element ExtendedInfos /DateTime (1,1)			
Attribute	M/O	Value	Description
Update	M	Date	Applicable date for this version of the ranking.



PreviousUpdate	O	Date	Date of the previous version of the Federation Ranking if applicable
NextUpdate	O	Date	Date of the next scheduled update of the Federation Ranking if applicable

Element ExtendedInfos /ExtendedInfo (0,N)			
Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element ExtendedInfos /ExtendedInfo /Extension (0,N)			
Attribute	M/O	Value	Description
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element ExtendedInfos /SportDescription (0,1)			
Attribute	M/O	Value	Description
DisciplineName	M	S(40)	Discipline name (not code) from Common Codes

Element Rankings (1,N)			
Attribute	M/O	Value	Description
Code	M	Full RSC	Full applicable RSC
Description	O	S(40)	Full name applicable to the code

### Sample (Athletics)

<Rankings Code="ATHW100M-----" Description="Women's 100 metres" >

Element Rankings /ExtendedInfos /ExtendedInfo (0,N)			
Attribute	M/O	Value	Description
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Type	O	See sport specific definition	
Value	O	See sport specific definition	

Element Rankings /ExtendedInfos /ExtendedInfo /Extension (0,N)			
Attribute	M/O	Value	Description
Code	O	N/A	
Pos	O	N/A	
Value	O	N/A	



Element Rankings /ExtendedInfos /ListComp (0,N)			
Attribute	M/O	Value	Description
Date	M	Date	Date when the related competition took place (starting date).
Place	O	S(40)	Place when the related competition took place.
Country	O	<a href="#">CC @Country</a>	Country when the related competition took place.
Pos	M	Numeric ##0	Order for the related competitions
AddInfo	O	String	Additional related information
Status	O	String	Status of related competition (could be cancelled for example)

### Sample (Alpine Skiing)

```
<ListComp Date="2014-01-25" Place="Kitzbuhel" Country="AUT" Pos="6" />
```

Element Rankings /Ranking (1,N)			
Attribute	M/O	Value	Description
Rank	M	Defined by Discipline	Ranking related to performance or points as applicable
RankEqual	O	S(1)	Identifies if a rank has been equalled. Send Y if applicable else not sent.
Value	O	Defined by Discipline	Performance value, usually actual performance or points.
ValueType	O	Defined by Discipline	
PreviousValue	O	Defined by Discipline	Previous performance value, usually actual performance or points. Only if applicable.
Movement	O	Numeric +##0 or -##0	Change in rank since the last release of the ranking.
SortOrder	M	Numeric ###0	Unique sort order based on rank to break rank ties
Competition	O	S(40)	Name of the competition related to the ranking. Usually only applicable where rankings are performance based (not points)
Date	O	Date	Date of the competition related to the ranking. Usually only applicable where rankings are performance based (not points)
Place	O	S(40)	Place of the competition related to the ranking. Usually only applicable where rankings are performance based (not points)
Country	O	<a href="#">CC @Country</a>	Country of the competition related to the ranking. Usually only applicable where rankings are performance based (not points)

Table comment: Attribute to be set Mandatory from Optional or redefined. Refer to the ODF Sport Data Dictionary for each of the disciplines

### Sample (Athletics)

```
<Ranking Rank="2" Value="10.85" ValueType="TIME" SortOrder="2" Competition="Commonwealth Games" Place="Glasgow(Hampden Park)" Country="GBR" Date="2014-07-28">
```

### Sample (Alpine Skiing)

```
<Ranking Rank="1" Value="652" ValueType="POINTS" SortOrder="1">
```

Element Rankings /Ranking /ExtRanking /ListComp (0,N)			
Attribute	M/O	Value	Description
Value	O	Defined by Discipline	Performance value of the related competition
ValueType	O	N/A	
Pos	O	Numeric ##0	Equivalent to the @Pos in the list of competitions.
Rank	O	Defined by Discipline	Rank in the related competition
RankEqual	O	S(1)	Identifies if a rank has been equalled. Send Y if applicable else not sent.
Discarded	O	S(1)	Send 'Y' if the value is not counted else do not send.

Table comment: Attribute to be set Mandatory from Optional or redefined. Refer to the ODF Sport Data Dictionary for each of the disciplines

Element Rankings /Ranking /ExtRanking /ListComp /Extension (0,N)			
Attribute	M/O	Value	Description
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element Rankings /Ranking /ExtRanking /ExtRank (0,N)			
Attribute	M/O	Value	Description
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Type	O	See sport specific definition	
Value	O	See sport specific definition	
ValueType	O	<a href="#">SC @ResultType</a>	
Rank	O	Defined by Discipline	
RankEqual	O	S(1)	Identifies if a rank has been equalled. Send Y if applicable else not sent.

Table comment: Attribute to be set Mandatory from Optional or redefined. Refer to the ODF Sport Data Dictionary for each of the disciplines

Element Rankings /Ranking /ExtRanking /ExtRank /Extension (0,N)			
Attribute	M/O	Value	Description
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element Rankings /Ranking /Competitor (1,1)			
Attribute	M/O	Value	Description
Code	O	S(20) with no leading zeroes	Competitor's ID Mandatory for Type= "A" or "T"
Type	M	S(1)	A for athlete, T for team, N for NOC's or NPC's (in case of Organisation rank)
Current	M	S(1)	Can be redefined by discipline.



			Usually send 'Y' if the competitor is taking part in the current competition or 'N' if not participating.
Organisation	O	<a href="#">CC @Organisation</a>	Organisation ID

Element Rankings /Ranking /Competitor /Description (0,1)			
Attribute	M/O	Value	Description
TeamName	M	S(73)	Name of the team. Only applies for teams / groups.
IFld	O	S(16)	Team IF number, send if available

Element Rankings /Ranking /Competitor /Description /ExtendedDescription (0,N)			
Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element Rankings /Ranking /Competitor /Composition /Athlete (1,N)			
Attribute	M/O	Value	Description
Code	M	S(20) with no leading zeroes	Athlete's ID, corresponding either to a team member or an individual athlete
Order	M	Numeric ##0	Send 1 for individual athlete; otherwise send the order of the team members within the team.

Element Rankings /Ranking /Competitor /Composition /Description (1,1)			
Attribute	M/O	Value	Description
GivenName	O	S(25)	Given name in WNPA format (mixed case)
FamilyName	M	S(25)	Family name in WNPA format (mixed case)
Gender	M	<a href="#">CC @PersonGender</a>	Gender of the athlete
Organisation	M	<a href="#">CC @Organisation</a>	Athletes' organisation
BirthDate	O	Date	Birth date (example: YYYY-MM-DD). Must include if the data is available
IFld	O	S(16)	International Federation ID
Class	O	<a href="#">CC @DisplineClass</a>	Code to identify the sport class in the case of events with athletes with a disability (e.g: Paralympic Games). This attribute is optional because it is not used in events without such athletes.
Horse	O	S(25)	Name of the athlete's horse
GuideID	O	S(20) without leading zeros	ID of the Guide, used for some athletes with a disability (e.g: Paralympic Games).
GuideFamilyName	O	S(25)	Family Name of the athlete's guide (mixed case).
GuideGivenName	O	S(25)	Given Name of the athlete's guide (mixed case).

Element Rankings /Ranking /Competitor /Composition /Description /ExtendedDescription (0,N)			
Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	



Value	O	See sport specific definition	
-------	---	-------------------------------	--

**Element Rankings /Ranking /Competitor /Composition /Team (0,1)**

In the case of current teams the number of athletes is 2 or more.

Attribute	M/O	Value	Description
Code	M	S(20) with no leading zeros	Team's ID (example ATHM4X400m--ESP01, 393553) When the Team is an historical one, then this ID starts with "T".
Number	M	Numeric #0	Team's number. Incremental number for each team within the team.
Name	O	S(73)	Team's name. It will apply to some of the disciplines. If there is no special rule for that discipline, send the Description of the code CC @Organisation.
IFld	O	S(16)	Federation number for the corresponding discipline (include if the discipline assigns international federation codes to teams)

**Element Rankings /Ranking /Competitor /Composition /Team /Composition /Athlete (1,N)**

Attribute	M/O	Value	Description
Code	M	S(20) with no leading zeros	Athlete ID of the listed team's member. Therefore, he/she is a member of the team.
Order	O	Numeric	Team member order

**2.1.22.6 Message Sort**

@Order attribute sorts each node whenever the attribute is informed.

## 2.1.23 Weather conditions

### 2.1.23.1 Description

The weather conditions is a message containing the current weather conditions in the venue or location. The use of venue or location is dependent to the level of detail that current weather conditions refer to. If weather conditions refer to a specific sailing course, then location code should be used. If weather conditions refer to athletics stadium, then the venue code should be used.

### 2.1.23.2 Header Values

The following table describes the message header attributes.

Attribute	Value	Comment
CompetitionCode	<a href="#">CC @Competition</a>	Unique ID for competition
DocumentCode	<a href="#">CC @Discipline</a>	Full RSC at discipline level
DocumentSubcode	<a href="#">CC @Location</a>	Location code (which could be at venue level)
DocumentType	DT_WEATHER	Weather conditions in the venue or location as referred to in DocumentSubcode.
Version	1..V	Version number associated to the message's content. Ascendant number
FeedFlag	"P"-Production "T"-Test	Test message or production message.
Date	Date	Date when the message is generated, expressed in the local time zone where the message was produced.
Time	Time	Time up to milliseconds when the message is generated, expressed in the local time zone where the message was produced.
LogicalDate	Date	Logical Date of events. This is the same as the physical day except when the unit or message transmission extends after midnight. See full explanation in ODF Foundation.
Source	<a href="#">SC @Source</a>	Code indicating the system which generated the message.

### 2.1.23.3 Trigger and Frequency

The message is sent

- once per session (approximately 30 minutes before start of session)
- when conditions change significantly during the session

### 2.1.23.4 Message Structure

The following table defines the structure of the message.

Level 1	Level 2	Level 3	Level 4	Level 5	Level 6	Level 7
<a href="#">Competition (0.1)</a>	Gen Sport Codes					
	<a href="#">ExtendedInfos (0.1)</a>					
		<a href="#">ExtendedInfo (1.N)</a>	Type Code Pos Value			







Attribute	M/O	Value	Description
Gen	O	S(20)	Version of the General Data Dictionary applicable to the message
Sport	O	S(20)	Version of the Sport Data Dictionary applicable to the message
Codes	O	S(20)	Version of the Codes applicable to the message

Element ExtendedInfos /ExtendedInfo (1,N)			
Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element ExtendedInfos /ExtendedInfo /Extension (0,N)			
Attribute	M/O	Value	Description
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element Weather (1,1)			
Attribute	M/O	Value	Description
Date	M	DateTime	Date/time of the conditions

Element Weather /Conditions (1,N)			
Attribute	M/O	Value	Description
Code	M	See table comment	Weather Points
Humidity	O	Numeric ##0	Humidity in %
Wind_Direction	O	<a href="#">CC @WindDirection</a>	Wind direction
Prec_Type	O	<a href="#">SC @PrecType</a>	Precipitation type

Table comment: Attribute to be set Mandatory from Optional or redefined. Refer to the ODF Sport Data Dictionary for each of the disciplines

Element Weather /Conditions /Condition (0,3)			
Send three times in the case of Winter conditions.			
Attribute	M/O	Value	Description
Code	M	SKY, SNOW, ICE, WATER	Weather conditions type
Value	M	CC @SnowConditions or CC @WeatherCondition or SC @SeaState	Codes that describe the Weather Condition.

Element Weather /Conditions /Precipitation (0,N)			
Attribute	M/O	Value	Description
Unit	M	See table comment	Metric system unit for precipitation

Value	M	Numeric ###0.0	Precipitation quantity
-------	---	-------------------	------------------------

Table comment: Attribute to be set Mandatory from Optional or redefined. Refer to the ODF Sport Data Dictionary for each of the disciplines

Element Weather /Conditions /Pressure (0,N)			
Attribute	M/O	Value	Description
Unit	M	S(3)	Send "hPa" as unit for pressure
Value	M	Numeric ###0	Air pressure in hPa

Element Weather /Conditions /Temperature (0,N)			
Send with different @Code in the case of winter conditions as needed.			
Attribute	M/O	Value	Description
Code	M	AIR, SNOW, ICE, WATER, WBGT, SAND	Air, Snow , Ice, Water, WBGT and Sand temperature.  If available, Snow and Ice temperature are only mandatory in winter.  Water and Sand temperature are optional depending on the Discipline.
Unit	M	See table comment	Metric system unit for temperature
Value	M	Numeric -##0.0 or ##0.0	Temperature in centigrade degrees (in case of positive temperature, do not send '+')
Type	O	See Table comment	Type of Temperature (like Maximum, Minimum, Normal, etc.)

Table comment: Attribute to be set Mandatory from Optional or redefined. Refer to the ODF Sport Data Dictionary for each of the disciplines

Element Weather /Conditions /Wind (0,N)			
Attribute	M/O	Value	Description
Code	M	S(5)	Wind Speed, send SPEED
Unit	M	See table comment	Metric system unit for Wind
Value	M	Numeric ##0.0	Wind speed in @Unit degrees.
Type	O	See Table comment	

Table comment: Attribute to be set Mandatory from Optional or redefined. Refer to the ODF Sport Data Dictionary for each of the disciplines

Element Weather /Conditions /ExtendedConditions /ExtendedCondition (1,N)			
Attribute	M/O	Value	Description
Type	O	See sport specific definition	
Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Element Weather /Conditions /ExtendedConditions /ExtendedCondition /Extension (0,N)			
Attribute	M/O	Value	Description



Code	O	See sport specific definition	
Pos	O	See sport specific definition	
Value	O	See sport specific definition	

Table comment: Attribute to be set Mandatory from Optional or redefined. Refer to the ODF Sport Data Dictionary for each of the disciplines

### **2.1.23.6 Message Sort**

There is no special sort order requirement for this message.

## 2.1.24 Medal Presenters

### 2.1.24.1 Description

The Medal Presenters message contains the information on who will present the medals for the events.

This is always a full message and all applicable elements and attributes are always sent.

Before Games the content of the message is complete list of medal and gift/flower/mascot/other article presenters. DocumentCode having GEN in the discipline is used.

During Games, before each award ceremony, the content of the message is only the presenters involved in the particular ceremony. DocumentCode is the full event RSC.

There is one message per event per venue containing all the information related to the presentation in the venue for that event. Updated as appropriate.

#### **When both medals and flowers or mascot or other gifts are presented in the same ceremony:**

DocumentSubType is VICTORY

- For the presenter(s) of medals then Function@Presenter is MEDAL\_PRESENTER
- For the presenter(s) of the supplementary awarded article:
- If the supplementary awarded article is flower then Function@Presenter is FLOWER\_PRESENTER
- If the supplementary awarded article is mascot or other gift then Function@Presenter is MASCOT\_PRESENTER
- If there is a person standing in the ceremony but not presenting anything then Function@Presenter is ACCOMPANY\_PRESENTER

#### **When only flowers or mascot or other gifts are presented in the venue and the medals elsewhere:**

If the awarded article is Flower then DocumentSubType is FLOWER

- For the presenter(s) of flowers then Function@Presenter is FLOWER\_PRESENTER
- If there is a person standing in the ceremony but not presenting anything then Function@Presenter is ACCOMPANY\_PRESENTER

If the awarded article is mascot or other gift then DocumentSubType is MASCOT

- For the presenter(s) of mascot or other gift then Function@Presenter is MASCOT\_PRESENTER
- If there is a person standing in the ceremony but not presenting anything then Function@Presenter is ACCOMPANY\_PRESENTER

#### **When only medals are presented in the ceremony (Medals Plaza case or no other items):**

DocumentSubType is MEDAL

- For the presenter(s) of medals then Function@Presenter is MEDAL\_PRESENTER
- If there is a person standing in the ceremony but not presenting anything then Function@Presenter is ACCOMPANY\_PRESENTER

#### **When the message is sent only to provide the list of names:**

DocumentSubType is PRESENTERS

- For the presenter(s) of medals then Function @Presenter is MEDAL\_PRESENTER
- For others who will be involved in the ceremony but not presenting medals then Function @Presenter is ACCOMPANY\_PRESENTER

### 2.1.24.2 Header Values

The following table describes the message header attributes.

Attribute	Value	Comment
CompetitionCode	CC @Competition	Unique ID for competition
DocumentCode	CC @Unit	Full RSC of the scheduled event unit for the presentation (not competition event)
DocumentSubcode	CC @VenueCode	Venue code or the venue where the presentation will take place.
DocumentType	DT_PRESENTER	Presenters Message
DocumentSubtype	SC @PresenterType	Presenter subtype
Version	1..V	Version number associated to the message's content. Ascendant number
FeedFlag	S(1)	Refer to ODF header definition
Date	Date	Refer to ODF header definition
Time	Time	Refer to ODF header definition
LogicalDate	Date	Refer to ODF header definition
Source	SC @Source	Code indicating the system which generated the message.

### 2.1.24.3 Trigger and Frequency

Trigger when the information is available about the presenters and for any changes.

### 2.1.24.4 Message Structure

The following table defines the structure of the message.

Level 1	Level 2	Level 3	Level 4	Level 5	Level 6
Competition (0,1)	Gen Sport Codes ExtendedInfos (0,1)	SportDescription (0,1)	DisciplineName		
		VenueDescription (0,1)	Venue VenueName		
	Presentation (1,N)	Event EventName Presenter (1,N)	Code MedalRank Function Order Description (1,1)	GivenName FamilyName Gender Nationality	
			Detail (1,N)	Language PresenterName LongPresenterName Role Highlight	



### 2.1.24.5 Message Values

Element: Competition (0,1)			
Attribute	M/O	Value	Description
Gen	O	S(20)	Version of the General Data Dictionary applicable to the message
Sport	O	S(20)	Version of the Sport Data Dictionary applicable to the message
Codes	O	S(20)	Version of the Codes applicable to the message

Element: ExtendedInfos /SportDescription (0,1)			
Attribute	M/O	Value	Description
DisciplineName	M	S(40)	Discipline name (not code) from Common Codes

Element: ExtendedInfos /VenueDescription (0,1)			
Attribute	M/O	Value	Description
Venue	M	CC @VenueCode	Venue Code
VenueName	M	S(25)	Venue short name (not code) from Common Codes

Element: Presentation (1,N)			
Attribute	M/O	Value	Description
Event	M	CC @Event	Full RSC of the event for the medal
EventName	O	S(40)	Short description of the event

Element: Presentation /Presenter (1,N)			
Attribute	M/O	Value	Description
Code	O	S(20) with no leading zeroes	Presenter ID, unique ID assigned by the medal presenter application or the Accreditation ID if available
MedalRank	O	Numeric 0	The rank of the medal 1, 2, 3 etc. or 0 of the same person presents all. Must be sent for a presenter. Do not send attribute for an accompanying person who is not making any presentation.
Function	M	SC @Pres	Function code of the Presenter in the Medal Presentation
Order	M	Numeric #0	Order of the presenters. For full message the order should be by function, family name then given name.

Element: Presentation /Presenter /Description (1,1)			
Attribute	M/O	Value	Description
GivenName	O	S(25)	Given name (mixed case)
FamilyName	M	S(25)	Family name (mixed case)
Gender	O	<a href="#">CC @PersonGender</a>	Gender of the person
Nationality	O	<a href="#">CC @Country</a>	Nationality of the Presenter

Element: Presentation /Presenter /Detail (1,N)			
Attribute	M/O	Value	Description
Language	M	<a href="#">CC @Language</a>	Language code or the data
PresenterName	M	S(32)	Name of the presenter for display, may include things like Mr, HRM, Sir etc.
LongPresenterName	M	S(80)	Long name of the presenter for display, may include things like Mr, HRM, Sir etc.



Role	O	S(45)	Role of the presenter in the competition
Highlight	O	S(200)	Any additional highlight information about the person

**Sample (one presenter for each medals and flowers)**

```
<ExtendedInfos>
  <SportDescription DisciplineName="Alpine Skiing" />
  <VenueDescription Venue="ABC" VenueName="Skiing Venue" />
</ExtendedInfos>
<Presentation Event="ALSMDH-----" EventName="Men's Downhill" >
  <Presenter Code="9995001" MedalRank="0" Function="MEDAL_PRESENTER" Order="1" >
    <Description GivenName="John" FamilyName="Smith" Gender="M" Nationality="SWE" />
    <Detail Language="ENG" PresenterName="Sir John Smith" LongPresenterName="Sir John Smith" Role="IOC
Executive Board Member" Highlight="John is a former World Champion in this event" />
  </Presenter>
  <Presenter Code="9995002" MedalRank="0" Function="FLOWER_PRESENTER" Order="2" >
    <Description GivenName="Gian Franco" FamilyName="Kasper" Gender="M" Nationality="SUI" />
    <Detail Language="ENG" PresenterName="Gian Franco Kasper" LongPresenterName="Gian Franco Kasper"
Role="FIS President" />
  </Presenter>
</Presentation>
```

**Sample (one presenter per medal)**

```
<Presentation Event="ALSMDH-----" EventName="Men's Downhill" >
  <Presenter Code="9995003" MedalRank="1" Function="MEDAL_PRESENTER" Order="1" >
    <Description GivenName="John" FamilyName="Smith" Gender="M" Nationality="SWE" />
    <Detail Language="ENG" PresenterName="HRH John Smith" LongPresenterName="HRH John Smith" Role="IOC
Executive Board Member" Highlight="John is a former World Champion in this event" />
  </Presenter>
  <Presenter Code="9995004" MedalRank="2" Function="MEDAL_PRESENTER" Order="2" >
    <Description GivenName="Gian Franco" FamilyName="Kasper" Gender="M" Nationality="SUI" />
    <Detail Language="ENG" PresenterName="Gian Franco Kasper" LongPresenterName="Gian Franco Kasper"
Role="FIS President" />
  </Presenter>
  <Presenter Code="9995005" MedalRank="3" Function="MEDAL_PRESENTER" Order="3" >
    <Description GivenName="Mary" FamilyName="Smith" Gender="W" Nationality="GER" />
    <Detail Language="ENG" PresenterName="Ms Mary Smith" LongPresenterName="Ms Mary Smith" Role="IOC
Executive Board Member" />
  </Presenter>
</Presentation>
```

**Sample (Presenter list)**

```
<Presentation Event="GEN-----" >
  <Presenter Code="9995001" Function="MEDAL_PRESENTER" Order="1" >
    <Description GivenName="John" FamilyName="Smith" Gender="M" Nationality="SWE" />
    <Detail Language="ENG" PresenterName="HRH John Smith" LongPresenterName="HRH John Smith"
Role="IOC Executive Board Member" Highlight="John is a former World Champion in this event" />
  </Presenter>
  <Presenter Code="9995352" Function="MEDAL_PRESENTER" Order="2" >
    <Description GivenName="Gian Franco" FamilyName="Kasper" Gender="M" Nationality="SUI" />
    <Detail Language="ENG" PresenterName="Gian Franco Kasper" LongPresenterName="Gian Franco
Kasper" Role="FIS President" />
  </Presenter>
  <Presenter Code="9995937" Function="MEDAL_PRESENTER" Order="3" >
    <Description GivenName="Mary" FamilyName="Smith" Gender="W" Nationality="GER" />
    <Detail Language="ENG" PresenterName="Ms Mary Smith" LongPresenterName="Ms Mary Smith"
Role="IOC Executive Board Member" />
  </Presenter>
</Presentation>
```



### 2.1.24.6 Message Sort

Sort by Presenter Order

## 2.1.25 Discipline/Venue Start Transmission

### 2.1.25.1 Description

The “discipline/venue start transmission” is a message to indicate the start of operations for one specific discipline in one specific venue within a logical day. Operations may start and stop multiple times within a logical day. This message indicates the start of DT\_KA messages for a Source.

### 2.1.25.2 Header Values

The following table describes the message header attributes.

Attribute	Value	Comment
CompetitionCode	<a href="#">CC_@Competition</a>	Unique ID for competition
DocumentCode	<a href="#">SC_@GMGNCode</a>	Global message for all disciplines
DocumentType	DT_LOCAL_ON	Global message for all disciplines
Version	1..V	Version number associated to the message's content. Ascendant number
FeedFlag	"P"-Production "T"-Test	Refer to ODF header definition
Date	Date	Refer to ODF header definition
Time	Time	Refer to ODF header definition
LogicalDate	Date	Refer to ODF header definition
Source	<a href="#">SC_@Source</a>	Code indicating the system which generated the message.

### 2.1.25.3 Trigger and Frequency

The message is sent as soon as the operations for one particular logical day are about to begin, and always before any other message for that logical day. Send again after DT\_LOCAL\_OFF if operations recommence.

### 2.1.25.4 Message Structure

The following elements describe the message structure from the OdfBody element.

Level 1	Level 2	Level 3	Level 4	Level 5	Level 6	Level 7
Competition (0,1)						
	Config (1,1)					
		KADelay				
		DelayOffSet				
		CompetitionDay				

### 2.1.25.5 Message Values

Element Config (1,1)			
Attribute	M/O	Value	Description
KADelay	M	Numeric	Delay in seconds for which a keep-alive message will be generated if there is no other real time activity. By default, this value is set to 60 seconds.
DelayOffSet	M	Numeric	Delay offset in seconds to be added to the KADelay parameter, for a final customer to assume the connection is broken By default, this value is set to 60 seconds.

Element Config (1,1)			
Attribute	M/O	Value	Description
CompetitionDay	O	Date	Competition date for that transmission, valid until the next DT_LOCAL_OFF. This attribute is only used during testing activities.

### 2.1.25.6 Sample

```
<OdfBody CompetitionCode="OWG2018" ..... >
  <Competition>
    <Config KADelay="60" DelayOffSet="180" />
  </Competition>
</OdfBody>
```

### 2.1.25.7 Message sort

There is no sort order for this message.

## 2.1.26 Discipline/Venue Stop Transmission

### 2.1.26.1 Description

The “discipline/venue stop transmission” is a message to indicate the end of operations for the venue/discipline with messages (until the restart of operations or the next day). This message indicates the end of DT\_KA messages for a Source (until the next DT\_LOCAL\_ON which may be the same day).

### 2.1.26.2 Header Values

The following table describes the message header attributes.

Attribute	Value	Comment
CompetitionCode	<a href="#">CC_@Competition</a>	Unique ID for competition
DocumentCode	<a href="#">SC_@GMGNCode</a>	Global message for all disciplines
DocumentType	DT_LOCAL_OFF	Global message for all disciplines
Version	1..V	Version number associated to the message's content. Ascendant number
FeedFlag	"P"-Production "T"-Test	Refer to ODF header definition
Date	Date	Refer to ODF header definition
Time	Time	Refer to ODF header definition
LogicalDate	Date	Refer to ODF header definition
Source	<a href="#">SC_@Source</a>	Code indicating the system which generated the message.

### 2.1.26.3 Trigger and Frequency

The message is sent as soon as the operations for one particular logical day are finished, to formally indicate the end of that logical day though it may restart with a new DT\_LOCAL\_ON.

### 2.1.26.4 Message Structure

The message structure only includes the OdfBody element (with their ODF header attributes, but no other hierarchical element below OdfBody).

### 2.1.26.5 Message Values

There are no attributes to be defined in this message.

### 2.1.26.6 Sample

```
<OdfBody CompetitionCode="OWG2018" DocumentType="DT_LOCAL_OFF"..... />
```

### 2.1.26.7 Message sort

There is no sort order for this message.

## 2.1.27 Discipline/Venue Keep Alive

### 2.1.27.1 Description

The Discipline/Venue Keep Alive message tells the user that the transmission or session taking place in one venue is still alive, in case there is no other message activity.

### 2.1.27.2 Header Values

The following table describes the message header attributes.

Attribute	Value	Comment
CompetitionCode	<a href="#">CC @Competition</a>	Unique ID for competition
DocumentCode	<a href="#">SC @GMGNCode</a>	Global message for all disciplines
DocumentType	DT_KA	Discipline/Venue Keep Alive
Version	1..V	Version number associated to the message's content. Ascendant number
FeedFlag	"P"-Production "T"-Test	Refer to ODF header definition
Date	Date	Refer to ODF header definition
Time	Time	Refer to ODF header definition
LogicalDate	Date	Refer to ODF header definition
Source	<a href="#">SC @Source</a>	Code indicating the system which generated the message.

### 2.1.27.3 Trigger and Frequency

Message producer will send this message when no other messages are sent (control or content messages) and the delay defined in the KADelay parameter of the DT\_LOCAL\_ON expires.

### 2.1.27.4 Message Structure

The message structure only includes the OdfBody element (with their ODF header attributes, but no other hierarchical element below OdfBody).

### 2.1.27.5 Message Values

There are no attributes to be defined in this message.

### 2.1.27.6 Sample

```
<OdfBody CompetitionCode="OWG2018" DocumentType="DT_KA"..... />
```

### 2.1.27.7 Message sort

There is no sort order for this message.

## 2.1.28 Participant Names

### 2.1.28.1 Description

A participant is considered to be any individual (type athlete, participating or not in the current games) or any official in one or several disciplines or a competitor being part of a team (team member).

Depending on the needs and location of a competition the participants may need their name displayed in a language other than the default, usually in Latin or ASCII characters (sometimes referred to as English).

This message is always a full message including the names of all participants delivered in DT\_PARTIC in the specified language (in header). If any of the names do not have a translation then the attribute is not sent.

### 2.1.28.2 Header Values

The following table describes the message header attributes

Attribute	Value	Comment
CompetitionCode	CC @Competition	Unique ID for competition
DocumentCode	CC @Discipline	Full RSC at discipline level
DocumentType	DT_PARTIC_NAME	List of participants by language
Version	1..V	Version number associated to the message's content. Ascendant number
Language	CC @Language	Language code. This is the language of the names in the message.
FeedFlag	"P"-Production "T"-Test	Test or Production message
Date	Date	Date when the message is generated, expressed in the local time zone where the message was produced.
Time	Time	Time up to milliseconds when the message is generated, expressed in the local time zone where the message was produced.
LogicalDate	Date	Refer to ODF header definition
Source	<a href="#">SC @Source</a>	Code indicating the system which generated the message.

### 2.1.28.3 Trigger and Frequency

The message is sent before the Games including all participants and is manually triggered as needed. Usually outside of competition hours.



### 2.1.28.4 Message Structure

The following table defines the structure of the message.

Level 1	Level 2	Level 3
Competition (0,1)	Gen Sport Codes Participant (1,N)	Code GivenName FamilyName PrintName PrintInitialName TVName TVInitialName TVFamilyName SCBLName SCBMName SCBSName

### 2.1.28.5 Message Values

Element: Competition (0,1)			
Attribute	M/O	Value	Description
Gen	O	S(20)	Version of the General Data Dictionary applicable to the message
Sport	O	S(20)	Version of the Sport Data Dictionary applicable to the message
Codes	O	S(20)	Version of the Codes applicable to the message

Element: Participant (1,N)			
Attribute	M/O	Value	Description
Code	M	S(20) with no leading zeroes	Participant's ID.
GivenName	O	S(25)	Given name (mixed case if applicable for the language)
FamilyName	M	S(25)	Family name (mixed case if applicable for the language)
PrintName	M	S(35)	Print name
PrintInitialName	M	S(18)	Print Initial name
TVName	M	S(35)	TV name
TVInitialName	M	S(18)	TV initial name
TVFamilyName	M	S(25)	TV family name
SCBLName	M	S(40)	Scoreboard Long Name
SCBMName	M	S(30)	Scoreboard Medium Name
SCBSName	M	S(20)	Scoreboard Short Name

**Sample**

```
<?xml version="1.0" encoding="utf-8"?>
<OdfBody CompetitionCode="OG2020" DocumentCode="ATH-----"
DocumentType="DT_PARTIC_NAME" Version="1" Language="GRE" FeedFlag="P" Date="2020-07-19"
Time="162653467" LogicalDate="2020-07-19" Source="OMS" >
  <Competition>
    <Participant Code="1007339" GivenName="Κατερίνα" FamilyName="Τσιρώνη" PrintName="ΤΕΙΠΩΝΗ
Κατερίνα" PrintInitialName="ΤΕΙΠΩΝΗ Κ" TVName="Κατερίνα ΤΕΙΠΩΝΗ" TVInitialName="Κ. ΤΕΙΠΩΝΗ
TVFamilyName="ΤΕΙΠΩΝΗ" SCBLName="ΤΤΕΙΠΩΝΗ Κατερίνα" SCBMName="ΤΕΙΠΩΝΗ Κ" SCBSName="ΤΕΙΠΩΝΗ"/>
  .....
```

**2.1.28.6 Message Sort**

The message is sorted by Participant @Code

**2.1.29 Medal Standings**

**2.1.29.1 Description**

The medal standings table contains the official medal standings up to the moment of the message generation for all the organisations that have been awarded a medal.

Medal standings is a bulk message. It is provided either

- for all disciplines when discipline in DocumentCode is "GEN-----" or
- for a single discipline when discipline in DocumentCode is DisciplineCode from Common Codes.
- for a sport or group of disciplines according to IF needs and aligned to ORIS C97 output requirements. For example a sport is CYC----- for Cycling, a group of disciplines NEV----- for Nordic Events

It is the complete medal standings message overall, for a sport or a group of disciplines or for one discipline.

The arrival of this message resets the entire previous medals table information.

This is always a full message and all applicable elements and attributes are always sent.

**2.1.29.2 Header Values**

The following table describes the message header attributes.

Attribute	Value	Comment
CompetitionCode	CC @Competition	Unique ID for competition
DocumentCode	CC @Discipline	Full RSC of the discipline. Send as overall, for a sport, a group of disciplines or for one discipline.
DocumentType	DT_MEDALS	Global message for all disciplines
Version	1..V	Version number associated to the message's content. Ascendant number
FeedFlag	"P"-Production "T"-Test	Refer to ODF header definition
Date	Date	Refer to ODF header definition
Time	Time	Refer to ODF header definition
LogicalDate	Date	Refer to ODF header definition
Source	SC @Source	Code indicating the system which generated the message.

### 2.1.29.3 Trigger and Frequency

"Medal standings" is sent as soon as any medal is officially awarded or changed (i.e. when the result is official, not the medal physically awarded) for any of the events that form part the competition schedule. As the competition progresses, successive changes in the medals' information are made. Therefore, this message is resent multiple times, as result of the normal operation. In this case, it has to be assumed that the message resets the complete previous medals' information.

### 2.1.29.4 Message Structure

The following table defines the structure of the message.

Level 1	Level 2	Level 3	Level 4	Level 5	Level 6	Level 7
Competition (0,1)						
	Gen Sport Codes					
	MedalStandings (1,1)					
		DateTime LastEvent TotalEvents FinishedEvents				
		MedalSummary (1,1)				
			MedalNumber (1,N)			
				Type Gold Silver Bronze Total		
		MedalsTable (1,1)				
			MedalLine (0,N)			
				Rank RankTotal SortRank RankEqual SortRankTotal RankTotalEqual Organisation Description (1,1)		
					OrganisationName ExtendedDescription (0,N)	
						Type Code Pos Value
				MedalNumber (1,N)		
					Type Gold Silver Bronze Total	

### 2.1.29.5 Message Values

Element: Competition (0,1)			
Attribute	M/O	Value	Description
Gen	O	S(20)	Version of the General Data Dictionary applicable to the message
Sport	O	S(20)	Version of the Sport Data Dictionary applicable to the message
Codes	O	S(20)	Version of the Codes applicable to the message



Element: MedalStandings (1,1)			
Attribute	M/O	Value	Description
DateTime	M	DateTime	Date and Time when the content has been updated Example: 2006-02-26T10:00:00+01:00
LastEvent	M	CC @Event	Full RSC at event level Last event updating the medal standings message
TotalEvents	M	Numeric	Total number of competition events (events that award medals)
FinishedEvents	M	Numeric	Number of competition events that have awarded a type of medal, out of the total In case of sports with 2 matches have medals (Bronze and Gold), this attribute only counts when the Gold medal has been awarded (not counted for Bronze because the event has not finished yet).

Element: MedalStandings /MedalSummary /MedalNumber (1,N) Send for each applicable Type related to the DocumentCode (all or a single discipline).			
Attribute	M/O	Value	Description
Type	M	<a href="#">SC @MedalSummaryType</a>	Type of medal summarization (categorize by event gender and all events). Must always be sent for all MedalSummaryTypes applicable in the discipline, even if no medals have been awarded yet. For global medal standing always send all.
Gold	O	Numeric	Number of gold medals for MedalSummary /MedalNumber @Type event categorization. Only send if value is greater than zero.
Silver	O	Numeric	Number of silver medals for MedalSummary /MedalNumber @Type event categorization. Only send if value is greater than zero.
Bronze	O	Numeric	Number of bronze medals for MedalSummary /MedalNumber @Type event categorization. Only send if value is greater than zero.
Total	O	Numeric	Total number of medals for MedalSummary /MedalNumber @Type event categorization. Only send if value is greater than zero.

Element: MedalStandings /MedalsTable /MedalLine (0,N) Only send organisations with medals			
Attribute	M/O	Value	Description
Rank	M	Numeric	Organisation's medal rank according to the medal's colour (gold, silver, bronze)
RankTotal	M	Numeric	Organisation's rank according to the total number of medals
SortRank	M	Numeric	Organisation's sort based on MedalLine @Rank. If there are rank ties, the order will be defined by the IOC rules.
RankEqual	M	S(1)	Y: If there are more organisations with the same @Rank N: If there are no more organisations with the same @Rank
SortRankTotal	M	Numeric	Organisation's sort based on MedalLine @RankTotal. If there are rank ties, the order will be determined by the attribute @SortRank
RankTotalEqual	M	S(1)	Y: If there are more organisations with the same @RankTotal N: If there are no more organisations with the same @RankTotal
Organisation	M	<a href="#">CC @Organisation</a>	Organisation's code.

Element: MedalStandings /MedalsTable /MedalLine /Description (1,1)			
Attribute	M/O	Value	Description
OrganisationName	M	S(60)	Name of the Organisation in text. Long Description from common codes.



Element: MedalStandings /MedalsTable /MedalLine /Description /ExtendedDescription (0,N)			
Attribute	M/O	Value	Description
Type	M		See sport descriptions if extended
Code	M		
Pos	O		
Value	O		

Element: MedalStandings /MedalsTable /MedalLine /MedalNumber (1,N) Only send, if the total number of medals for the MedalSummaryType is greater than zero.			
Attribute	M/O	Value	Description
Type	M	<a href="#">CC @MedalSummaryType</a>	Type of medal summarization (categorize by event gender and all events). Only send if not zero for this organisation
Gold	O	Numeric	For the MedalLine @Organisation: Number of gold medals for MedalSummary /MedalNumber @Type event categorization. Only send if value is greater than zero.
Silver	O	Numeric	For the MedalLine @Organisation: Number of silver medals for MedalSummary /MedalNumber @Type event categorization. Only send if value is greater than zero.
Bronze	O	Numeric	For the MedalLine @Organisation: Number of bronze medals for MedalSummary /MedalNumber @Type event categorization. Only send if value is greater than zero.
Total	M	Numeric	For the MedalLine @Organisation: Total number of medals for MedalSummary /MedalNumber @Type event categorization

### 2.1.29.6 Sample

```
<Competition>
  <MedalStandings DateTime="2012-08-11T23:52:28+01:00"
  LastEvent="BK3WTEAM3-----" TotalEvents="302" FinishedEvents="287">
    <MedalSummary>
      <MedalNumber Type="M" Gold="149" Silver="151" Bronze="188" Total="488" />
      <MedalNumber Type="W" Gold="130" Silver="130" Bronze="148" Total="408" />
      <MedalNumber Type="X" Gold="8" Silver="8" Bronze="8" Total="24" />
      <MedalNumber Type="O" Gold="2" Silver="2" Bronze="2" Total="6" />
      <MedalNumber Type="TOT" Gold="287" Silver="289" Bronze="344" Total="920" />
    </MedalSummary>
    <MedalsTable>
      <MedalLine Rank="1" SortRank="1" RankEqual="N" RankTotal="1" SortRankTotal="1"
      RankTotalEqual="N" Organisation="USA">
        <Description OrganisationName="UnitedStates" />
        <MedalNumber Type="M" Gold="15" Silver="15" Bronze="13" Total="43" />
        <MedalNumber Type="W" Gold="29" Silver="14" Bronze="15" Total="58" />
        <MedalNumber Type="X" Bronze="1" Total="1" />
        <MedalNumber Type="TOT" Gold="44" Silver="29" Bronze="29" Total="102" />
      </MedalLine>
      <MedalLine Rank="2" SortRank="2" RankEqual="N" RankTotal="2" SortRankTotal="2"
      RankTotalEqual="N" Organisation="CHN">
        <Description OrganisationName="China" />
        <MedalNumber Type="M" Gold="17" Silver="8" Bronze="11" Total="36" />
        <MedalNumber Type="W" Gold="20" Silver="18" Bronze="11" Total="49" />
        <MedalNumber Type="X" Gold="1" Silver="1" Total="2" />
        <MedalNumber Type="TOT" Gold="38" Silver="27" Bronze="22" Total="87" />
      </MedalLine>
      .....
    </MedalsTable>
  </MedalStandings>
</Competition>
```

### 2.1.29.7 Message Sort

Message should be sorted by the SortRank @Value attribute. There is no defined sort for MedalSummary.

## 2.1.30 Medallists of the Day

### 2.1.30.1 Description

The “medallists of the day” contains the list of medallists who achieved a medal (not necessarily awarded) during the current logical day.

The “medallists of the day” message is a complete message.

The arrival of this message resets the entire previous “medallists of the day” information.

The message is not by discipline, it could contain several disciplines.

### 2.1.30.2 Header Values

The following table describes the ODF header attributes (the DocumentSubtype attribute is used to identify the message along with the DocumentCode and DocumentType attributes).

Attribute	Value	Comment
CompetitionCode	<a href="#">CC_@Competition</a>	Unique ID for competition
DocumentCode	GEN-----	It is a global message for all the disciplines
DocumentType	DT_MEDALLISTS_DAY	Medallists by day
DocumentSubtype	YYYY-MM-DD	Refer to the ODF header definition
Version	1...V	Version number associated to the message's content. Ascendant number
FeedFlag	"P"-Production "T"-Test	Refer to the ODF header definition
Date	Date	Refer to the ODF header definition
Time	Time	Refer to the ODF header definition
LogicalDate	Date	Refer to the ODF header definition
Source	<a href="#">SC_@Source</a>	Code indicating the system which generated the message.

### 2.1.30.3 Trigger and Frequency


“Medallists by day” is sent at the end of the current day (Logical Date) with the official medals known for today.

In case that some medal(s) of previous days were changed then a new version of this (for the DocumentSubtype corresponding) will be sent as soon as possible.

### 2.1.30.4 Message Structure

The following table defines the structure of the message.

Level 1	Level 2	Level 3	Level 4	Level 5	Level 6	Level 7	Level 8	Level 9	Level 10
Competition (0,1)	Gen Sport Codes	Discipline (1,N)	Code TotalEvents FinishedEvents Event (1,N)	Code EventName Date Medal (1,N)	Code Competitor (0,N)				

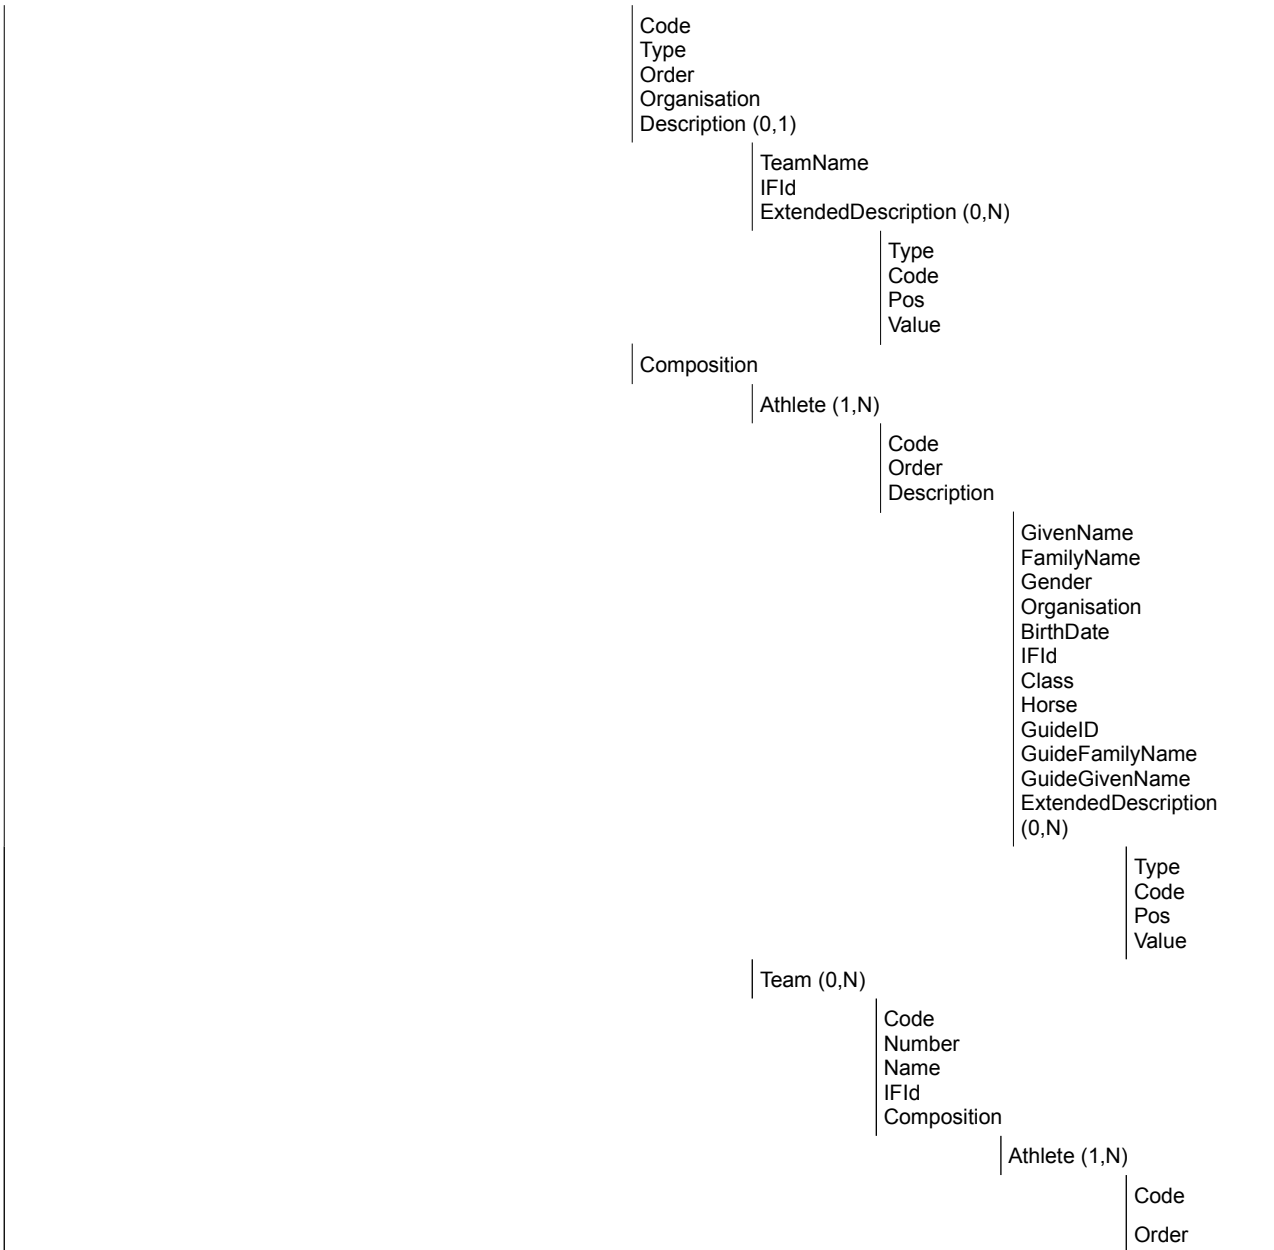

### 2.1.30.5 Message Values

Element: Competition (0,1)			
Attribute	M/O	Value	Description
Gen	O	S(20)	Version of the General Data Dictionary applicable to the message
Sport	O	S(20)	Version of the Sport Data Dictionary applicable to the message
Codes	O	S(20)	Version of the Codes applicable to the message



Element: Discipline (1,N)			
Attribute	M/O	Value	Description
Code	M	CC @Discipline	Full RSC of the Discipline
TotalEvents	O	Numeric	Total number of competition events (events that award medals)
FinishedEvents	O	Numeric	Number of competition events that have awarded a type of medal, out of the total In case of sports with 2 matches have medals (Bronze and Gold), this attribute only counts when the Gold medal has been awarded (not counted for Bronze because the event has not finished yet).

Element: Discipline /Event (1,N)			
Attribute	M/O	Value	Description
Code	M	CC @Event	Full RSC of the Event
EventName	M	S(40)	Event name (not code) from Common Codes
Date	O	YYYY-MM-DD	Date of the Gold medal match.

Element: Discipline /Event /Medal (1,N)			
Where more than one medal of the same type is awarded for an event (for example two bronze medals) there must be a separate Medal element for each medal awarded (i.e. one for each competitor).			
Attribute	M/O	Value	Description
Code	M	<a href="#">SC @MedalType</a>	Medal type gold, silver or bronze

Element: Discipline /Event /Medal /Competitor (0,N)			
Attribute	M/O	Value	Description
Code	M	S(20) with no leading zeroes	Competitor's ID
Type	M	T, A	T for team A for athlete
Order	M	Numeric	Competitor order (Send 1 by default) and in the case of tie the order will be defined by the IOC rules.
Organisation	M	<a href="#">CC @Organisation</a>	Competitor's organisation's

Element: Discipline /Event /Medal /Competitor /Description (0,1)			
Attribute	M/O	Value	Description
TeamName	O	S(73)	Name of the team. Only applies for teams / groups. Not usually for pairs (figure skating & beach volleyball are the exceptions).
IFId	O	S(16)	Team IF number, send if available

Element: Discipline /Event /Medal /Competitor /Description /ExtendedDescription (0,N)			
Attribute	M/O	Value	Description
Type	M		See sport descriptions if extended
Code	M		
Pos	O		
Value	O		

Element: Discipline /Event /Medal /Competitor /Composition /Athlete (1,N)			
Attribute	M/O	Value	Description
Code	M	S(20) with no leading zeroes	Individual athlete's ID (if Competitor @Type="A" or team member's ID (if Competitor @Type="T").
Order	M	Numeric	Team member order for medal (according to each different sport rule) Send 1 if individual medal

Element: Discipline /Event /Medal /Competitor /Composition /Athlete /Description Athletes extended information.			
Attribute	M/O	Value	Description
GivenName	O	S(25)	Given name in WNPA format (mixed case)
FamilyName	M	S(25)	Family name in WNPA format (mixed case)
Gender	M	<a href="#">CC @PersonGender</a>	Gender of the athlete
Organisation	M	<a href="#">CC @Organisation</a>	Athletes' organisation
BirthDate	O	Date	Birth date (example: YYYY-MM-DD). Must include if the data is available
IFId	O	S(16)	International Federation ID
Class	O	<a href="#">CC @SportClass</a>	Code to identify the sport class in the case of events with athletes with a disability (e.g: Paralympic Games).  This attribute is optional because it is not used in events without such athletes.
Horse	O	S(25)	Name of the athlete's horse
GuideID	O	S(20) without leading zeros	ID of the Guide, used for some athletes with a disability (e.g: Paralympic Games).
GuideFamilyName	O	S(25)	Family Name of the athlete's guide (mixed case). Used for some athletes with a disability (e.g: Paralympic Games).
GuideGivenName	O	S(25)	Given Name of the athlete's guide (mixed case). Used for some athletes with a disability (e.g: Paralympic Games).

Element: Discipline /Event /Medal /Competitor /Composition /Athlete /Description /ExtendedDescription (0,N)			
Attribute	M/O	Value	Description
Type	M		See sport descriptions if extended
Code	M		
Pos	O		
Value	O		

Element: Team /Composition /Team (0,N) (0,N) Only applicable in the case of team of teams.			
Attribute	M/O	Value	Description
Code	M	S(20) with no leading zeroes	Team's ID (example ATHM4X400m--ESP01, 393553) When the Team is an historical one, then this ID starts with "T".
Number	M	Numeric #0	Team's number. Incremental number for each team within the team.
Name	O	S(73)	Team's name. It will apply to some of the disciplines. If there is not any special rule for that discipline, send the Description of the code <a href="#">CC @Organisation</a> .
IFId	O	S(16)	Federation number for the corresponding discipline (include if the discipline assigns international federation codes to teams)

Element: Team /Composition /Team /Composition /Athlete (1,N)			
Attribute	M/O	Value	Description
Code	M	S(20) with no leading zeroes	Athlete's ID of the listed team's member. Therefore, he/she is part of the team's composition.
Order	O	Numeric	Team member order.



### 2.1.30.6 Sample

```

<Competition>
  <Discipline Code="CSL-----">
    <Event Code="CSLMK1-----" EventName="Men's K1">
      <Medal Code="ME_GOLD">
        <Competitor Code="1101716" Type="A" Order="1" Organisation="ESP">
          <Composition>
            <Athlete Code="1101716" Order="1">
              <Description GivenName="John" FamilyName="Smith" Gender="M" Organisation="ESP"
BirthDate="1992-12-15" />
            </Athlete>
          </Composition>
        </Competitor>
      </Medal>
      <Medal Code="ME_GOLD">
        <Competitor Code="1101556" Type="A" Order="1" Organisation="SUI">
          <Composition>
            <Athlete Code="1101556" Order="1">
              <Description GivenName="John" FamilyName="Brown" Gender="M" Organisation="SUI"
BirthDate="1994-12-15" />
            </Athlete>
          </Composition>
        </Competitor>
      </Medal>
      .....
    </Event>
  </Discipline>
  <Discipline Code="DIV-----">
    <Event Code="DIVW3mSync-----" EventName="Women's 3m Synchronized Diving">
      <Medal Code="ME_GOLD">
        <Competitor Code="DIVW3MSYNC--CHN01" Type="T" Order="1" Organisation="CHN">
          <Description TeamName="China" />
          <Composition>
            <Athlete Code="1072148" Order="1">
              <Description GivenName="Joan" FamilyName="Smith" Gender="W" Organisation="CHN"
BirthDate="1992-12-15" />
            </Athlete>
            <Athlete Code="1072150" Order="2">
              <Description GivenName="Emily" FamilyName="Brown" Gender="W" Organisation="CHN"
BirthDate="1992-12-13" />
            </Athlete>
          </Composition>
        </Competitor>
      </Medal>
      .....
    </Event>
  </Discipline>
  .....

```

### 2.1.30.7 Message Sort

Events in the message will be sorted by discipline code and event code. Within an event, medals will be sorted by medal type (gold, silver, bronze). In case of tie or for the team's athletes, the order will be according to a medal order (given by each sport rule).

## 2.1.31 Global Good Morning

### 2.1.31.1 Description

The "global good morning" is a message to indicate the start of day of the operations for all the disciplines with some messages to be sent within a logical day. All the messages defined in this document should send between DT\_GLOBAL\_GM/ DT\_GLOBAL\_GN messages.

### 2.1.31.2 Header Values

The following table describes the ODF header attributes.

Attribute	Value	Comment
CompetitionCode	<a href="#">CC_@Competition</a>	Unique ID for competition
DocumentCode	GEN-----	It is a global message for all the disciplines
DocumentType	DT_GLOBAL_GM	Global good morning
Version	1..V	Version number associated to the message's content. Ascendant number
FeedFlag	"P"-Production "T"-Test	Refer to the ODF header definition
Date	Date	Refer to the ODF header definition
Time	Time	Refer to the ODF header definition
LogicalDate	Date	Refer to the ODF header definition
Source	<a href="#">SC_@Source</a>	Code indicating the system which generated the message.

### 2.1.31.3 Trigger and Frequency

"Global good morning" is sent as soon as the operations for one particular logical day are about to begin, and always before any other message for that logical day.

### 2.1.31.4 Message Structure

The message structure just includes an OdfBody element (with their ODF header attributes, but no other hierarchical element below OdfBody).

### 2.1.31.5 Message Values

There are no attributes defined in this message.

### 2.1.31.6 Sample

```
<OdfBody CompetitionCode="OG2012" DocumentCode="GEN-----" Time="054040632"
Date="2012-07-27" FeedFlag="P" LogicalDate="2012-07-27" DocumentType="DT_GLOBAL_GM" Source="PDC"
Version="1" />
```

### 2.1.31.7 Message sort

There is no sort order for this message.

## 2.1.32 Global Good Night

### 2.1.32.1 Description

The "global good night" is a message to indicate the end of day of the operations for all the disciplines within a logical day.

### 2.1.32.2 Header Values

The following table describes the ODF header attributes.

Attribute	Value	Comment
CompetitionCode	<a href="#">CC_@Competition</a>	Unique ID for competition
DocumentCode	GEN-----	It is a global message for all the disciplines
DocumentType	DT_GLOBAL_GN	Global good night
Version	1..V	Version number associated to the message's content. Ascendant number
FeedFlag	"P"-Production "T"-Test	Refer to the ODF header definition
Date	Date	Refer to the ODF header definition

Time	Time	Refer to the ODF header definition
LogicalDate	Date	Refer to the ODF header definition
Source	<a href="#">SC.@Source</a>	Code indicating the system which generated the message.

### 2.1.32.3 Trigger and Frequency

“Global good night” is sent as soon as the operations for one particular logical day are finished, to formally indicate the end of that logical day.

### 2.1.32.4 Message Structure

The message structure just includes an OdfBody element (with their ODF header attributes, but no other hierarchical element below OdfBody).

### 2.1.32.5 Message Values

There are no attributes defined in this message.

### 2.1.32.6 Sample

```
<OdfBody CompetitionCode="OG2012" DocumentCode="GEN-----" Time="234040632"
Date="2012-07-27" FeedFlag="P" LogicalDate="2012-07-27" DocumentType="DT_GLOBAL_GN" Source="PDC"
Version="1" />
```

### 2.1.32.7 Message sort

There is no sort order for this message.



## 2.1.33 Transmission Test

### 2.1.33.1 Description

The message is designed to test transmission only and can be sent at any time including outside of normal transmission period. It is only to be used if transmission / connectivity needs to be tested and should not be sent during operations when systems are behaving normally.

### 2.1.33.2 Header Values

The following table describes the message header attributes.

Attribute	Value	Comment
CompetitionCode	CC @Competition	Unique ID for competition
DocumentCode	SC @GMGNCode	Discipline/venue code
DocumentType	DT_PING	Transmission test
Version	1..V	Version number associated to the message's content. Ascendant number. Depending on the originating system this value may always be 1 or incrementing.
FeedFlag	"P"-Production "T"-Test	Refer to ODF header definition
Date	Date	Refer to ODF header definition
Time	Time	Refer to ODF header definition
LogicalDate	Date	Refer to ODF header definition
Source	SC @Source	Code indicating the system which generated the message.

### 2.1.33.3 Trigger and Frequency

Message producer will send this message to test transmission as needed.

The message is not required to be sent between DT\_LOCAL\_ON/DT\_LOCAL\_OFF or between DT\_GLOBAL\_GM/DT\_GLOBAL\_GN sessions.

### 2.1.33.4 Message Structure

The message structure only includes the OdfBody element (with their ODF header attributes, but no other hierarchical element below OdfBody).

### 2.1.33.5 Message Values

There are no attributes to be defined in this message.

### 2.1.33.6 Sample

```
<?xml version="1.0" encoding="utf-8"?>
<OdfBody DocumentType="DT_PING" Date="2022-02-09" Time="125314469" LogicalDate="2022-02-09" Source="XYZALP1"
CompetitionCode="OWG2022" FeedFlag="P" DocumentCode="ALP-----XYZ-----" Version="1" />
```

### 2.1.33.7 Message sort

There is no sort order for this message.

## 2.1.34 Background Document

### 2.1.34.1 Description

A Background document message is considered as a unique document of background information.

The arrival of this message replaces the previous Background document with the same DocumentSubcode for the language.

### 2.1.34.2 Header Values

The following table describes the ODF header attributes

Attribute	Value	Comment
CompetitionCode	CC @Competition	Unique ID for competition
DocumentCode	CC @Discipline	Full RSC at the discipline level
DocumentSubcode	S(34)	Background ID
DocumentType	DT_BCK	Type of BCK documents
Version	1...V	Version number associated to the message's content. Ascendant number
Language	CC @Language	Language code
FeedFlag	"P"-Production "T"-Test	Refer to the ODF header definition
Date	Date	Refer to the ODF header definition
Time	Time	Refer to the ODF header definition
LogicalDate	Date	Refer to the ODF header definition
Source	<a href="#">SC @Source</a>	Code indicating the system which generated the message.

### 2.1.34.3 Trigger and Frequency

Background document will be sent every time that the document is published.



### 2.1.34.4 Message Structure

The following table defines the structure of the message.

Level 1	Level 2	Level 3	Level 4
Competition (0,1)	Gen Sport Codes Categories (1,1)	Category (1,N)	Code CategoryName Main
	Document (1,1)	Parent ReportType ReportTypeName SortOrder FileName ReportFormat ModificationIndicator Title (1,1)	- - -
		Body	-

### 2.1.34.5 Message Values

Element: Competition (0,1)			
Attribute	M/O	Value	Description
Gen	O	S(20)	Version of the General Data Dictionary applicable to the message
Sport	O	S(20)	Version of the Sport Data Dictionary applicable to the message
Codes	O	S(20)	Version of the Codes applicable to the message

Element: Categories (1,1) / Category (1,N)			
Attribute	M/O	Value	Description
Code	M	CC @BackgroundSport	Code of application Criteria level 1 (usually sport but may be other categories)
CategoryName	M	S(40)	Category Name
Main	O	S(1)	"Y" if this category is the main category else do not send. Must be one main category for each valid document.



Element: Document			
Attribute	M/O	Value	Description
Parent	M	S(34) <sup>1</sup>	Identifier of parent document. If the report has no parent ID then it takes value 0
ReportType	M	CC @BackgroundReport	Report Type code of application (for example MDL – Past Medallists, PRE –Past Results, FCT - Facts, CER – Ceremonies Facts, etc.)
ReportTypeName	M	S(40)	Report Type Name
SortOrder	O	S(8)	This field identifies the Sort order associated to the report. Value to be defined by the Committee.
FileName	M/O	S(10)	This field identifies the filename of the report. This is only Mandatory for DT_BCK_IMP
ReportFormat	M	S(1)	This field identifies the format of the report. The possible values are: "H" for HTML Reports and "P" for PDF Reports.
ModificationIndicator	O	S(1)	Send D to Delete / Unpublish BCK document else do not send. If ModificationIndicator='D', then the received version of the document should be deleted.

Element: Document /Title (1,1)			
Attribute	M/O	Value	Description
-	M	Free text <sup>2</sup>	Text describing Document Title

Element: Document /Body			
Attribute	M/O	Value	Description
-	M	Free text <sup>3</sup>	Accordingly to the ReportFormat field the body element will contain:  In the case of "H" (HTML Report) the value will be the Free Text containing the Body of the HTML report.  In the case of "P" (PDF Report) the value will be the PDF report encoded in Base64.

### 2.1.34.6 Sample

```
OdfBody CompetitionCode="OG2016" DocumentType="DT_BCK"
DocumentCode="GYM-----" DocumentSubcode="8" Time="160052578" Source="PDC"
Date="2016-07-28" LogicalDate="2016-07-28" FeedFlag="P" Language="ENG" Version="17" >
<Competition>
<Categories>
<Category Code="GAR" CategoryName="Artistic Gymnastics" Main="Y" />
<Category Code="GTR" CategoryName="Trampoline" />
</Categories>
<Document Parent="8" ReportType="FCT" ReportTypeName="Facts" SortOrder="N86D" ReportFormat="H">
<Title>
<![CDATA[Facility Description]]>
</Title>
<Body>
<![CDATA[<p>As of 22 July 2016</p>
<p>&nbsp;</p>
<p><strong>The Powerhouse</strong></p>
<p>Text Here ...</p>]]>
</Body>
</Document >
</Competition>
</OdfBody>
```

1 Parent: background documents are originally created in English. If the Press Operations staff consider it appropriate to translate any report, the translations can be created from the English one. For translated items Parent element is the DocumentSubcode of the English version. Example:

English version -> DocumentSubcode ="1230"

French translation -> Parent="1230"

2 The information provided should be codified in UTF-8.

3 The information provided should be codified in UTF-8.

### 2.1.34.7 Message sort

The message is not sorted.

## 2.1.35 Background Import Document

### 2.1.35.1 Description

Background import document message is considered as a unique document of background in the language.

The arrival of this message resets the previous Background document.

Note that this message is not distributed and only used to initialise the central systems from the data provider.

### 2.1.35.2 Header Values

The following table describes the ODF header attributes

Attribute	Value	Comment
CompetitionCode	<a href="#">CC @Competition</a>	Unique ID for competition
DocumentCode	CC @BackgroundSport	Background Category
DocumentSubcode	S(34)	Background iID
DocumentType	DT_BCK_IMP	Type of BCK documents
Version	1...V	Version number associated to the message's content. Ascendant number
Language	<a href="#">CC @Language</a>	Language code
FeedFlag	"P"-Production "T"-Test	Refer to the ODF header definition
Date	Date	Refer to the ODF header definition
Time	Time	Refer to the ODF header definition
LogicalDate	Date	Refer to the ODF header definition

### 2.1.35.3 Trigger and Frequency

Background import document will be received by the OCOG in the months before games.

### 2.1.35.4 Message Structure

The message structure of the Background import document message is the same as the Background document message.

### 2.1.35.5 Message Values

All message attributes are the same as the background document message.

### 2.1.35.6 Message sort

The message is not sorted.

## 2.1.36 Participant Biography

### 2.1.36.1 Description

The Participant Biography is a message containing the biography of one individual participant. The participant could be an athlete, an official, coach or a team member. The participant will have always assigned at least one discipline, although it could be more than one.

The message resets the previous Participant Biography information. There is only one participant per message.

### 2.1.36.2 Header Values

The following table describes the ODF header attributes

Attribute	Value	Comment
CompetitionCode	<a href="#">CC.@Competition</a>	Unique ID for competition
DocumentCode	DDDGTP-----	DDD – Discipline G – Gender TYP – Participant Type (ATH, COA, OFF, BIO).  For example ATHMCOA-----: Athletics Male Coach. TYP BIO is usually used outside of the Olympic Games
DocumentSubcode	S(20) with no leading zeroes	Participant's ID
DocumentType	DT_BIO_PAR	Participant's Biography
Version	1...V	Version number associated to the message's content. Ascendant number
Language	<a href="#">CC.@Language</a>	Language code
FeedFlag	"P"-Production "T"-Test	Refer to the ODF header definition
Date	Date	Refer to the ODF header definition
Time	Time	Refer to the ODF header definition
LogicalDate	Date	Refer to the ODF header definition
Source	<a href="#">SC.@Source</a>	Code indicating the system which generated the message.

### 2.1.36.3 Trigger and Frequency

Participant's Biography messages will usually be available the first day of the press operations. These messages are sent the first time including the complete bulk information known up to that moment.

### 2.1.36.4 Message Structure

The following optional elements must be included, if the message is for an ATH, a COA or an OFF:

- For OFF: OfficialFunction

The following table defines the structure of the message.

Level 1	Level 2	Level 3	Level 4	Level 5	Level 6	Level 7	Level 8
Competition (0,1)							
	Gen						
	Sport						
	Codes						
	ParticipantBiography (1,1)						



Level 1	Level 2	Level 3	Level 4	Level 5	Level 6	Level 7	Level 8
		Code					
		Gender					
		Organisation					
		Current					
		ModificationIndicator					
		ExternalCode (*)					
		ParticipantID(*)					
		GivenName(*)					
		FamilyName(*)					
		BirthDate(*)					
		Height(*)					
		Weight(*)					
		PlaceofBirth					
		CountryofBirth					
		PlaceofResidence					
		CountryofResidence					
		Nationality(*)					
		OlympicSolidarity(*)					
		Language (0,1)					
			Language				
			CHighlights (0,1)				
				Highlights (1,3)			
					Type		
					-		
			Ginterest (0,1)				
				Nickname (0,1)			
				-			
				PrevNames (0,1)			
				-			
				Hobbies (0,1)			
				-			
				Occupation (0,1)			
				-			
				Education (0,1)			
				-			
				MarStatus (0,1)			
				-			
				Family (0,1)			
				-			
				LangSpoken (0,1)			
				-			
				Club_Name (0,1)			
				-			
				Coach (0,1)			
				-			
				Position_Style (0,1)			
				-			
				Hand (0,1)			
				-			
				Sporting_Relatives (0,1)			
				-			



Level 1	Level 2	Level 3	Level 4	Level 5	Level 6	Level 7	Level 8
				OtherSports (0,1)			
					-		
				Debut (0,1)			
					-		
				Injuries (0,1)			
					-		
				Music (0,1)			
					-		
				Choreographer (0,1)			
					-		
				Nat_Team (0,1)			
					-		
				Nat_League (0,1)			
					-		
				Start (0,1)			
					-		
				Reason (0,1)			
					-		
				Ambition (0,1)			
					-		
				Milestones (0,1)			
					-		
				Training (0,1)			
					-		
				Memorable (0,1)			
					-		
				Hero (0,1)			
					-		
				Influence (0,1)			
					-		
				Ritual (0,1)			
					-		
				Philosophy (0,1)			
					-		
				Award (0,1)			
					-		
				Appointment (0,1)			
					-		
				Int_Appointment (0,1)			
					-		
				WinLoss (0,1)			
					-		
				Other_Role (0,1)			
					-		





Level 1	Level 2	Level 3	Level 4	Level 5	Level 6	Level 7	Level 8
				Prev_Role (0,1)			
					-		
				AddInformation (0,1)			
					-		
				ExtendedBios (0,1)			
					ExtendedBio (1,N)		
						Type	
						Code	
						Pos	
						Value	
						ContentType	
						-	
						Extension (0,N)	
							Code
							Pos
							Value
		Discipline (*)					
			Code (*)				
		OfficialFunction (0,N)					
			FunctionId				
			Main_Function_Flag				

Table Note: (\*) Field needed when the message is used to import data into the Info Diffusion System – Participant’s Biography Import message-

### 2.1.36.5 Message Values

Element: Competition (0,1)			
Attribute	M/O	Value	Description
Gen	O	S(20)	Version of the General Data Dictionary applicable to the message
Sport	O	S(20)	Version of the Sport Data Dictionary applicable to the message
Codes	O	S(20)	Version of the Codes applicable to the message



Fields are mandatory or optional depending on the biography type.

Element: Competition /ParticipantBiography (1,1)						
Attribute	M/O				Value	Description
	ATH	COA	OFF	BIO		
Code	M	M	M	M	S(20) with no leading zeroes	Participant's ID
Gender	M	M	M	M	<a href="#">CC @PersonGender</a>	Participant's gender
Organisation	M	M	O	O	<a href="#">CC @Organisation</a>	Organisation's ID Mandatory for ATH or COA
Current	M	M	M	O	boolean	true – For participants in the current event false – For historical participants
ModificationIndicator	O	O	O	O	S(1)	Send only to delete or unpublish a biography, when needed send D for Delete.
PlaceofBirth	O	O		O	S(75)	Place of Birth. This information is not needed in the case of officials/referees.
CountryofBirth	O	O		O	<a href="#">CC @Country</a>	Country of Birth. This information is not needed in the case of officials/referees.
PlaceofResidence	O	O		O	S(75)	Place of Residence. This information is not needed in the case of officials/referees.
CountryofResidence	O	O		O	<a href="#">CC @Country</a>	Country of Residence. This information is not needed in the case of officials/referees.

Element: ParticipantBiography /Language (0,1)						
Attribute	M/O				Value	Description
	ATH	COA	OFF	BIO		
Language	M	M	M	M	<a href="#">CC @Language</a>	Language code

Element: ParticipantBiography /Language /CHighlights (0,1) /Highlights (1,3)						
Attribute	M/O				Value	Description
	ATH	COA	OFF	BIO		
Type	M	M	M	M	S(3)	ATH – Highlights are for an athlete COA – Highlights are for a coach OFF – Highlights are for an official
-	O	O	O	O	Free Text with a maximum length of 20000 characters.	Free Text describing the most important results the ATH or COA or OFF achieved during his career

Element: ParticipantBiography /Language/GInterest /Nickname						
Attribute	M/O				Value	Description
	ATH	COA	OFF	BIO		
-	O			O	Free Text with a maximum length of 400 characters.	Nickname



Element: ParticipantBiography /Language/GInterest /PrevNames						
Attribute	M/O				Value	Description
	ATH	COA	OFF	BIO		
-	<input type="radio"/>			<input type="radio"/>	Free Text with a maximum length of 400 characters.	Other/ previous names

Element: ParticipantBiography /Language/GInterest /Hobbies						
Attribute	M/O				Value	Description
	ATH	COA	OFF	BIO		
-	<input type="radio"/>			<input type="radio"/>	Free Text with a maximum length of 1000 characters.	Hobbies

Element: ParticipantBiography /Language/GInterest /Occupation						
Attribute	M/O				Value	Description
	ATH	COA	OFF	BIO		
-	<input type="radio"/>			<input type="radio"/>	Free Text with a maximum length of 400 characters.	Occupation

Element: ParticipantBiography /Language/GInterest /Education						
Attribute	M/O				Value	Description
	ATH	COA	OFF	BIO		
-	<input type="radio"/>			<input type="radio"/>	Free Text with a maximum length of 400 characters.	Education

Element: ParticipantBiography /Language/GInterest /MarStatus						
Attribute	M/O				Value	Description
	ATH	COA	OFF	BIO		
-	<input type="radio"/>			<input type="radio"/>	<a href="#">CC@MaritalStatus</a>	Marital status

Element: ParticipantBiography /Language/GInterest /Family						
Attribute	M/O				Value	Description
	ATH	COA	OFF	BIO		
-	<input type="radio"/>			<input type="radio"/>	Free Text with a maximum length of 400 characters.	Information about the family of the athlete

Element: ParticipantBiography /Language/GInterest /LangSpoken						
Attribute	M/O				Value	Description
	ATH	COA	OFF	BIO		
-	<input type="radio"/>		<input type="radio"/>	<input type="radio"/>	Free Text with a maximum length of 400 characters.	Languages spoken

Element: ParticipantBiography /Language/GInterest /Club_Name						
Attribute	M/O				Value	Description
	ATH	COA	OFF	BIO		
-	<input type="radio"/>			<input type="radio"/>	Free Text with a maximum length of 400 characters.	Club the athlete belongs to



Element: ParticipantBiography /Language/GInterest /Coach						
Attribute	M/O				Value	Description
	ATH	COA	OFF	BIO		
-	<input type="radio"/>			<input type="radio"/>	Free Text with a maximum length of 400 characters.	Coach name

Element: ParticipantBiography /Language/GInterest /Position_Style						
Attribute	M/O				Value	Description
	ATH	COA	OFF	BIO		
-	<input type="radio"/>			<input type="radio"/>	Free Text with a maximum length of 400 characters.	Position or style

Element: ParticipantBiography /Language/GInterest /Hand						
Attribute	M/O				Value	Description
	ATH	COA	OFF	BIO		
-	<input type="radio"/>			<input type="radio"/>	Free Text with a maximum length of 400 characters.	Hand

Element: ParticipantBiography /Language/GInterest /Sporting_Relatives						
Attribute	M/O				Value	Description
	ATH	COA	OFF	BIO		
-	<input type="radio"/>			<input type="radio"/>	Free Text with a maximum length of 1000 characters.	Sporting or famous relatives

Element: ParticipantBiography /Language/GInterest /OtherSports						
Attribute	M/O				Value	Description
	ATH	COA	OFF	BIO		
-	<input type="radio"/>			<input type="radio"/>	Free Text with a maximum length of 1000 characters.	Other sports

Element: ParticipantBiography /Language/GInterest /Debut						
Attribute	M/O				Value	Description
	ATH	COA	OFF	BIO		
-	<input type="radio"/>			<input type="radio"/>	Free Text with a maximum length of 400 characters.	Debut

Element: ParticipantBiography /Language/GInterest /Injuries						
Attribute	M/O				Value	Description
	ATH	COA	OFF	BIO		
-	<input type="radio"/>			<input type="radio"/>	Free Text with a maximum length of 4000 characters.	Injuries

Element: ParticipantBiography /Language/GInterest /Music						
Attribute	M/O				Value	Description
	ATH	COA	OFF	BIO		
-	<input type="radio"/>			<input type="radio"/>	Free Text with a maximum length of 400 characters.	Music for performance



Element: ParticipantBiography /Language/GInterest /Choreographer						
Attribute	M/O				Value	Description
	ATH	COA	OFF	BIO		
-	<input type="radio"/>			<input type="radio"/>	Free Text with a maximum length of 400 characters.	Choreographer of Performance

Element: ParticipantBiography /Language/GInterest /Nat_Team						
Attribute	M/O				Value	Description
	ATH	COA	OFF	BIO		
-	<input type="radio"/>			<input type="radio"/>	Free Text with a maximum length of 400 characters.	When started in national team

Element: ParticipantBiography /Language/GInterest /Nat_League						
Attribute	M/O				Value	Description
	ATH	COA	OFF	BIO		
-	<input type="radio"/>			<input type="radio"/>	Free Text with a maximum length of 400 characters.	National League information

Element: ParticipantBiography /Language/GInterest /Start						
Attribute	M/O				Value	Description
	ATH	COA	OFF	BIO		
-	<input type="radio"/>			<input type="radio"/>	Free Text with a maximum length of 1000 characters.	When started sporting career

Element: ParticipantBiography /Language/GInterest /Reason						
Attribute	M/O				Value	Description
	ATH	COA	OFF	BIO		
-	<input type="radio"/>			<input type="radio"/>	Free Text with a maximum length of 1000 characters.	Reasons for taking up this sport

Element: ParticipantBiography /Language/GInterest /Ambition						
Attribute	M/O				Value	Description
	ATH	COA	OFF	BIO		
-	<input type="radio"/>			<input type="radio"/>	Free Text with a maximum length of 1000 characters.	Ambitions

Element: ParticipantBiography /Language/GInterest /Milestones						
Attribute	M/O				Value	Description
	ATH	COA	OFF	BIO		
-	<input type="radio"/>			<input type="radio"/>	Free Text with a maximum length of 4000 characters.	Milestones

Element: ParticipantBiography /Language/GInterest /Training						
Attribute	M/O				Value	Description
	ATH	COA	OFF	BIO		
-	<input type="radio"/>			<input type="radio"/>	Free Text with a maximum length of 1000 characters.	Training



Element: ParticipantBiography /Language/GInterest /Memorable						
Attribute	M/O				Value	Description
	ATH	COA	OFF	BIO		
-	<input type="radio"/>			<input type="radio"/>	Free Text with a maximum length of 1000 characters.	Most memorable sporting achievements

Element: ParticipantBiography /Language/GInterest /Hero						
Attribute	M/O				Value	Description
	ATH	COA	OFF	BIO		
-	<input type="radio"/>			<input type="radio"/>	Free Text with a maximum length of 1000 characters.	Hero

Element: ParticipantBiography /Language/GInterest /Influence						
Attribute	M/O				Value	Description
	ATH	COA	OFF	BIO		
-	<input type="radio"/>			<input type="radio"/>	Free Text with a maximum length of 1000 characters.	Most influential person in sporting career

Element: ParticipantBiography /Language/GInterest /Ritual						
Attribute	M/O				Value	Description
	ATH	COA	OFF	BIO		
-	<input type="radio"/>			<input type="radio"/>	Free Text with a maximum length of 1000 characters.	Superstitions and rituals

Element: ParticipantBiography /Language/GInterest /Philosophy						
Attribute	M/O				Value	Description
	ATH	COA	OFF	BIO		
-	<input type="radio"/>			<input type="radio"/>	Free Text with a maximum length of 1000 characters.	Sporting philosophy / motto

Element: ParticipantBiography /Language/GInterest /Award						
Attribute	M/O				Value	Description
	ATH	COA	OFF	BIO		
-	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	Free Text with a maximum length of 2000 characters.	Awards won

Element: ParticipantBiography /Language/GInterest /Appointment						
Attribute	M/O				Value	Description
	ATH	COA	OFF	BIO		
-		<input type="radio"/>		<input type="radio"/>	Free Text with a maximum length of 400 characters.	Year of coaching appointment

Element: ParticipantBiography /Language/GInterest /Int_Appointment						
Attribute	M/O				Value	Description
	ATH	COA	OFF	BIO		
-			<input type="radio"/>	<input type="radio"/>	Free Text with a maximum length of 400 characters.	Year of first international appointment as an official



Element: ParticipantBiography /Language/GInterest /WinLoss						
Attribute	M/O				Value	Description
	ATH	COA	OFF	BIO		
-		O		O	Free Text with a maximum length of 400 characters.	Win / Loss record with current team

Element: ParticipantBiography /Language/GInterest /Other_Role						
Attribute	M/O				Value	Description
	ATH	COA	OFF	BIO		
-		O	O	O	Free Text with a maximum length of 2000 characters.	Other current roles

Element: ParticipantBiography /Language/GInterest /Prev_Role						
Attribute	M/O				Value	Description
	ATH	COA	OFF	BIO		
-		O	O	O	Free Text with a maximum length of 2000 characters.	Previous Roles

Element: ParticipantBiography /Language/GInterest /AddInformation						
Attribute	M/O				Value	Description
	ATH	COA	OFF	BIO		
-	O	O	O	O	Free Text with a maximum length of 10000 characters.	Additional information

Element: ParticipantBiography /Language /GInterest /ExtendedBios (0,1) /ExtendedBio (1,N)						
Attribute	M/O				Value	Description
	ATH	COA	OFF	BIO		
Type	M	M	M	M		See sport descriptions
Code	M	M	M	M		
Pos	O	O	O	O		
Value	O	O	O	O		
ContentType	O	O	O	O		Only filled if the data in the free text below is used. Options include: text/html image/jpeg image/png
-	O	O	O	O		Additional information. This field is not used in the Olympic Games and must not be filled.

Element: ParticipantBiography /Language /GInterest /ExtendedBios /ExtendedBio /Extension (0,N)						
Attribute	M/O				Value	Description
	ATH	COA	OFF	BIO		
Code	M	M	M	M		See sport descriptions
Pos	O	O	O	O		
Value	O	O	O	O		



Element: ParticipantBiography /OfficialFunction						
Attribute	M/O			Value	Description	
	ATH	COA	OFF			
FunctionId			M	O	CC @ResultsFunction	Optional officials' function code
Main_Function_Flag			O	O	S(1)	Y - @FunctionId is main function N - @FunctionId is not main function

The following table describes extension for social media and Youth Olympic Games to be applied Competition /ParticipantBiography /Language /GInterest /ExtendedBios /ExtendedBio

Type	Code	Pos	Value	Description	Expected
EB_SOCIALMEDIA	SC @SocialMedia		String	For @Type: Send proposed type	When available
				For @Code: Send proposed code	
				For @Pos: Do not send anything	
				For @Value Send the user name for the applicable social media site.	
EB_COMPETITION	YOUTH		S(1)	For @Type: Send proposed type	If applicable
				For @Code: Send proposed code	
				For @Pos: Do not send anything	
				For @Value: Send Y if the athlete has participated in the Youth Olympic Games else do not send]	





### 2.1.36.6 Sample

```
<ParticipantBiography Code="1090269" Gender="M" Organisation="AUS" Current="true" >
  <Language Language="ENG">
    <CHighlights>
      <Highlights>
.....
      </Highlights>
    </CHighlights>
    <GInterest>
      <Nickname>
        <![CDATA[Steve, Hobbsy, Hooksy. (vis.org.au, 16 Jul 2007)]]>
      </Nickname>
      <Hobbies>
        <![CDATA[He enjoys managing property, playing golf, reading, listening to music and skydiving.
(vis.org.au, 16 Jul 2007; athletics.com.au, 13 Aug 2011)]]>
      </Hobbies>
      <Occupation>
        <![CDATA[Athlete]]>
      </Occupation>
      <Education>
        <![CDATA[Business - Royal Melbourne Institute of Technology, Melbourne, VIC, AUS]]>
      </Education>
      <LangSpoken>
        <![CDATA[English]]>
      </LangSpoken>
      <Club_Name>
        <![CDATA[Box Hill Athletics Club and WAIS, Melbourne, VIC, AUS]]>
      </Club_Name>
      <Coach>
        <![CDATA[Alex Parnov (RUS) (sbs.com.au, 12 May 2012)]]>
      </Coach>
      <Sporting_Relatives>
        <![CDATA[He is an amateur sprinter and he competed in the 2010 Stawell Gift race. The event is
held every Easter weekend at Central Park in Western Victoria. The race is run on grass over 120m up
a slight gradient. (iaaf.org, 03 Aug 2010; stawellgift.com, 03 Aug 2010) He played Australian Rules
football before concentrating on pole vault. (Athletics Australia, 05 Apr 2004)]]>
      </Sporting_Relatives>
      <OtherSports>
        <![CDATA[His mother Erica Hooker [nee Nixon] was a 1972 Olympian and a Commonwealth Games long
jump silver medallist. His father, Bill, was a four-time national title holder and represented
Australia in the 400m, 400m hurdles, 800m and 4x400m. (Athletics Australia, 05 Apr 2004)]]>
      </OtherSports>
      <ExtendedBio>
        <ExtendedBio Type="EB_SOCIALMEDIA" Code="TWITTER" Value="@IamtheBest" />
      </ExtendedBio>
    </GInterest>
  </Language>
</Participant>
```

### 2.1.36.7 Message sort

There is no specific sorting for this message.

## 2.1.37 Participant Biography Import

### 2.1.37.1 Description

The Participant Biography Import is a message containing the biography of one individual participant. The participant could be an athlete, an official, coach or a team member. The participant will always have assigned at least one discipline, although it could be more than one.

The message resets the previous Participant Biography Import information. There is only one participant per message.

Note that this message is not distributed and only used to initialise the central systems from the data provider.



### 2.1.37.2 Header Values

The following table describes the ODF header attributes

Attribute	Value	Comment
CompetitionCode	<a href="#">CC.@Competition</a>	Unique ID for competition
DocumentCode	S(20) with no leading zeroes	Participant's external ID. This ID will start with "A" for Athletes, "C" for Coaches and "O" for Officials.
DocumentSubcode	S(3)	ATH – Athlete COA – Coach OFF – Official
DocumentType	DT_BIO_PAR_IMP	Participant's Biography Import
Version	1..V	Refer to the ODF header definition
Language	<a href="#">CC.@Language</a>	Language code
FeedFlag	"P"-Production "T"-Test	Refer to the ODF header definition
Date	Date	Refer to the ODF header definition
Time	Time	Refer to the ODF header definition
LogicalDate	Date	Refer to the ODF header definition

### 2.1.37.3 Trigger and Frequency

Participant's Biography Import will be received by the OCOG some months before the games.

### 2.1.37.4 Message Structure

It has the same attributes (except for @Code) and elements as in the Participant's Biography message, and adding the attributes/elements that are marked with an asterisk (\*). See the next chapter.

The elements that are optional in this message depend on the DocumentSubcode attribute.

### 2.1.37.5 Message Values

Element: Competition (0,1)			
Attribute	M/O	Value	Description
Gen	O	S(20)	Version of the General Data Dictionary applicable to the message
Sport	O	S(20)	Version of the Sport Data Dictionary applicable to the message
Codes	O	S(20)	Version of the Codes applicable to the message



Element: Competition / ParticipantBiography			
Attribute	M/O	Value	Description
ExternalCode	M	S(20) with no leading zeroes	Participant's Biography Import external ID. This ID will start with "A" for Athletes, "C" for Coaches and "O" for Officials.  It is the same as in the @DocumentCode header's attribute. The ID is assigned by the biography's provider and must also match the external ID for the same athlete if supplied with records.
ParticipantID	O	S(20) with no leading zeroes	Participant's ID (in Info Diffusion System).  This ID is a pre-matched value with the Accreditation ID (ie is the accreditation ID of the person for the current Games).
GivenName	O	S(25)	Given name in mixed case
FamilyName	M	S(25)	Family name mixed case
BirthDate	M	YYYY-MM-DD	Date of birth. This information may not known at the very beginning, but it will be completed for all participants after successive updates
Height	O	Numeric ###	Height in centimetres. It will be included when this information is available. This information is not needed in the case of officials/referees.
Weight	O	Numeric ###	Weight in kilograms. It will be included when this information is available. This information is not needed in the case of officials/referees.
PlaceofBirth	O	S(75)	Place of Birth. This information is not needed in the case of officials/referees.
CountryofBirth	O	CC @Country	Country of Birth. This information is not needed in the case of officials/referees.
PlaceofResidence	O	S(75)	Place of Residence. This information is not needed in the case of officials/referees.
CountryofResidence	O	CC @Country	Country of Residence. This information is not needed in the case of officials/referees.
Nationality	O	CC @Country	Participant's nationality.  For some participants not to be sent in exceptional circumstances when it is not known.
OlympicSolidarity	O	S(1)	Send Y if the participant is a member of the Solidarity / Scholarship Program else not sent.

Element: Competition / ParticipantBiography /Discipline			
Attribute	M/O	Value	Description
Code	M	CC @Discipline	Full RSC Discipline's code

### 2.1.37.6 Message sort

There is no specific sorting for this message.

## 2.1.38 Team Biography

### 2.1.38.1 Description

The Team Biography message contains a team participating in the event (competitor of type team).  
The message resets the previous Team Biography information. This message includes only one team.

### 2.1.38.2 Header Values

The following table describes the ODF header attributes

Attribute	Value	Comment
CompetitionCode	CC @Competition	Unique ID for competition
DocumentCode	CC @DisciplineGender	Full RSC at Discipline Gender level For example BKBM-----
DocumentSubcode	S(20) with no leading zeroes	Team's ID
DocumentType	DT_BIO_TEA	Team's Biography
Version	1...V	Version number associated to the message's content. Ascendant number
Language	<a href="#">CC @Language</a>	Language code
FeedFlag	"P"-Production "T"-Test	Refer to the ODF header definition
Date	Date	Refer to the ODF header definition
Time	Time	Refer to the ODF header definition
LogicalDate	Date	Refer to the ODF header definition
Source	<a href="#">SC @Source</a>	Code indicating the system which generated the message.

### 2.1.38.3 Trigger and Frequency

Team's Biography messages will be available the first day of the press operations. These messages are sent the first time including the complete bulk information known up to that moment.

### 2.1.38.4 Message Structure

The elements that are optional in this message are:

- CHighlights
- Ginterest

Level 1	Level 2	Level 3	Level 4	Level 5	Level 6	Level 7	Level 8
Competition (0,1)	Gen Sport Codes	TeamBiography (1,1)	Code Gender Organisation Number Name Current ModificationIndicator ExternalCode (*) Language	Language CHighlights (0,1)	Highlights (1,1)		





Element: TeamBiography (1,1)			
Attribute	M/O	Value	Description
Code	M	S(20) with no leading zeroes	Team's ID (example BKM400ESP01, 393553)
Gender	M	<a href="#">CC @DisciplineGender</a>	Discipline Gender Code of the Team
Organisation	M	<a href="#">CC @Organisation</a>	Team's organisation ID
Number	O	Numeric 0	Team's number. It will be 1 when there is only one team (for one organisation in one event). Otherwise, it will be incremental, 1, 2, etc. Mandatory in the case of @Current=true.
Name	M/O	S(73)	Team's name. It applies to some of the disciplines. It will be the same as @Organisation when there is no a specific rule for a discipline. It is Optional for Team's Biography Update when @ModificationIndicator=D
Current	M	Boolean	true – The team is participating in the event false – The team is not participating (historical team)
ModificationIndicator	O	S(1)	Send only to delete or unpublish a biography, when needed send D for Delete.

Element: TeamBiography /Language			
Attribute	M/O	Value	Description
Language	M	<a href="#">CC @Language</a>	Language code

Element: TeamBiography /Language /CHighlights (0,1) /Highlights (1,1)			
Attribute	M/O	Value	Description
-	O	Free Text with a maximum length of 4000 characters.	Free Text describing the most important results the team achieved during his/her career

Element: TeamBiography /Language /GInterest (0,1) /Nickname (0,1)			
Attribute	M/O	Value	Description
-	O	Free Text with a maximum length of 2000 characters.	Nickname

Element: TeamBiography /Language /GInterest (0,1) /Music (0,1)			
Attribute	M/O	Value	Description
-	O	Free Text with a maximum length of 400 characters.	Music for performance

Element: TeamBiography /Language /GInterest (0,1) /Choreographer (0,1)			
Attribute	M/O	Value	Description
-	O	Free Text with a maximum length of 150 characters.	Choreographer of Performance

Element: TeamBiography /Language /GInterest (0,1) /Training (0,1)			
Attribute	M/O	Value	Description
-	O	Free Text with a maximum length of 400 characters.	Training



Element: TeamBiography /Language /GInterest (0,1) /Award (0,1)			
Attribute	M/O	Value	Description
-	O	Free Text with a maximum length of 2000 characters.	Awards

Element: TeamBiography /Language /GInterest (0,1) /AddInformation (0,1)			
Attribute	M/O	Value	Description
-	O	Free Text with a maximum length of 10000 characters.	Additional Information

Element: TeamBiography /Language /GInterest /ExtendedBios (0,1) /ExtendedBio			
Attribute	M/O	Value	Description
Type	M		See sport descriptions
Code	M		See sport descriptions
Pos	O		See sport descriptions
Value	O		See sport descriptions

Element: TeamBiography /Language /GInterest /ExtendedBios (0,1) /ExtendedBio /Extension (1,N)			
Attribute	M/O	Value	Description
Code	M		See sport descriptions
Pos	O		See sport descriptions
Value	O		See sport descriptions

### 2.1.38.6 Message sort

There is no specific sorting for this message.

## 2.1.39 Team Biography Import

### 2.1.39.1 Description

The Team Biography Import is a message containing the biography of one team.

The message resets the previous Team Biography Import information. There is only one team per message.

Note that this message is not distributed and only used to initialise the central systems from the data provider.

### 2.1.39.2 Header Values

The following table describes the ODF header attributes

Attribute	Value	Comment
CompetitionCode	<a href="#">CC @Competition</a>	Unique ID for competition
DocumentCode	S(20) with no leading zeroes	Team's external ID. This ID will start with "T".
DocumentType	DT_BIO_TEA_IMP	Team's Biography Import
Version	1...V	Version number associated to the message's content. Ascendant number
Language	<a href="#">CC @Language</a>	Language code
FeedFlag	"P"-Production "T"-Test	Refer to the ODF header definition
Date	Date	Refer to the ODF header definition
Time	Time	Refer to the ODF header definition
LogicalDate	Date	Refer to the ODF header definition

### 2.1.39.3 Trigger and Frequency

Team's Biography Import will be provided to the OCOG some months before games.

### 2.1.39.4 Message Structure

It has the same attributes and elements as in the Team's Biography message (except for @Code), and adding the attributes/elements that are marked with an asterisk (\*).

### 2.1.39.5 Message Values

Element: TeamBiography			
Attribute	M/O	Value	Description
ExternalCode	M	S(20) with no leading zeroes	Team's external ID.  It is the same as in the @DocumentCode header's attribute. The ID is assigned by the biography's provider.

Element: TeamBiography /Discipline			
Attribute	M/O	Value	Description
Code	M	CC @Discipline	Full RSC Discipline code

Element: TeamBiography /Discipline /RegisteredEvent			
Attribute	M/O	Value	Description
Event	M	CC @Event	Full RSC of the Event



### 2.1.39.6 Message sort

There is not a special sorting for this message.

## 2.1.40 NOC/NPC Biography

### 2.1.40.1 Description

The NOC/NPC Biography message contains the NOC/NPC information.

The message resets the previous NOC/NPC information. There is only one NOC/NPC per message.

### 2.1.40.2 Header Values

The following table describes the ODF header attributes

Attribute	Value	Comment
CompetitionCode	<a href="#">CC @Competition</a>	Unique ID for competition
DocumentCode	GEN-----	Global message for all Organisation biographies
DocumentSubcode	S(3)	Organisation Code
DocumentType	DT_BIO_NOC	NOC/NPC
Version	1...V	Version number associated to the message's content. Ascendant number
Language	<a href="#">CC @Language</a>	Language code
FeedFlag	"P"-Production "T"-Test	Refer to the ODF header definition
Date	Date	Refer to the ODF header definition
Time	Time	Refer to the ODF header definition
LogicalDate	Date	Refer to the ODF header definition
Source	<a href="#">SC @Source</a>	Code indicating the system which generated the message.

### 2.1.40.3 Trigger and Frequency

These messages will be available the first day of the press operations, including the complete bulk information known up to that moment.

### 2.1.40.4 Message Structure

The following elements describe the message structure from the OdfBody element.

The elements that are optional in this message are:

- GInterest
- Anthem and its child element
- Membership and its child element
- Officials and its child element
- Participation and its child element

Level 1	Level 2	Level 3	Level 4	Level 5	Level 6
Competition (0,1)					
	Gen				
	Sport				
	Codes				
	Organisation (1,1)				



Level 1	Level 2	Level 3	Level 4	Level 5	Level 6
		Code			
		Current			
		ModificationIndicator			
		ExternalCode (*)			
		Name (*)			
		Language			
		Language			
		GInterest (0,1)			
			OCFlagBearer (0,N)		
				Code	
			Highlights (0,1)		
				-	
			AddInformation (0,1)		
				-	
		Anthem (0,1)			
			Title (0,1)		
				-	
			Composer (0,1)		
				-	
			Inducted (0,1)		
				-	
		Membership (0,1)			
			OfficialNocName (0,1)		
				-	
			CountriesIncluded (0,1)		
				-	
			FoundingDate (0,1)		
				-	
			DateIOCRognition (0,1)		
				-	
		Officials (0,1)			
			NOCPresident (0,1)		
				-	
			NOCGenSecretary (0,1)		
				-	
			IOCMembers (0,1)		
				-	
			IOCExecBoard (0,1)		
				-	
		Participation (0,1)			
			FirstOGAppearance (0,1)		
				-	
			NumOGAppearance (0,1)		
				-	
			Summary (0,1)		

Level 1	Level 2	Level 3	Level 4	Level 5	Level 6
					-

Table Note: (\*) Field needed when the message is used to import data into the Info Diffusion System - NOC/NPC Biography Import.

### 2.1.40.5 Message Values

Element: Competition (0,1)			
Attribute	M/O	Value	Description
Gen	O	S(20)	Version of the General Data Dictionary applicable to the message
Sport	O	S(20)	Version of the Sport Data Dictionary applicable to the message
Codes	O	S(20)	Version of the Codes applicable to the message

Element: Organisation (1,1)			
Attribute	M/O	Value	Description
Code	M	<a href="#">CC @Organisation</a>	Organisation's ID
Current	M	Boolean	true - Organisation participating in the event false - Historical organisation
ModificationIndicator	O	S(1)	Send only to delete or unpublish a biography, when needed send D for Delete.

Element: Organisation /Language			
Attribute	M/O	Value	Description
Language	M	<a href="#">CC @Language</a>	Language code

Element: Organisation /Language /GInterest (0,N) /OCFlagBearer			
Attribute	M/O	Value	Description
Code	M	S(20) with no leading zeroes	Flag Bearer Id. This attribute is not expected in the _IMP message.

Element: Organisation /Language /GInterest (0,1) /Highlights			
Attribute	M/O	Value	Description
-	O	Free Text with a maximum length of 4000 characters.	Free Text with highlights

Element: Organisation /Language /GInterest (0,1) /AddInformation (0,1)			
Attribute	M/O	Value	Description
-	O	Free Text with a maximum length of 10000 characters.	Additional Information

Element: Organisation /Language /Anthem (0,1) /Title (0,1)			
Attribute	M/O	Value	Description
-	O	Free Text	Anthem's title

Element: Organisation /Language /Anthem (0,1) /Composer (0,1)			
Attribute	M/O	Value	Description
-	O	Free Text	Anthem's composer name



Element: Organisation /Language /Anthem (0,1) /Inducted (0,1)			
Attribute	M/O	Value	Description
-	O	YYYY	Anthem's inducted year

Element: Organisation /Language /Membership (0,1) /OfficialNocName (0,1)			
Attribute	M/O	Value	Description
-	O	Free Text	Official Organisation name

Element: Organisation /Language /Membership (0,1) /CountriesIncluded (0,1)			
Attribute	M/O	Value	Description
-	O	Free Text	Countries that composes this Organisation

Element: Organisation /Language /Membership (0,1) /FoundingDate (0,1)			
Attribute	M/O	Value	Description
-	O	YYYY	Founding date

Element: Organisation /Language /Membership (0,1) /DateIOCRecognition (0,1)			
Attribute	M/O	Value	Description
-	O	YYYY	IOC recognition date

Element: Organisation /Language /Officials (0,1) /NOCPresident (0,1)			
Attribute	M/O	Value	Description
-	O	Free Text	NOC/NPC President's name

Element: Organisation /Language /Officials (0,1) /NOCGenSecretary (0,1)			
Attribute	M/O	Value	Description
-	O	Free Text	NOC/NPC General Secretary's name

Element: Organisation /Language /Officials (0,1) /IOCMembers (0,1)			
Attribute	M/O	Value	Description
-	O	Free Text	IOC member's name(s)

Element: Organisation /Language /Officials (0,1) /IOExecBoard (0,1)			
Attribute	M/O	Value	Description
-	O	Free Text	IOC Executive Board Member's name(s)

Element: Organisation /Language /Participation (0,1) /FirstOGAppearance (0,1)			
Attribute	M/O	Value	Description
-	O	Free Text	Year of the first appearance in Olympic / Paralympic Games

Element: Organisation /Language /Participation (0,1) /NumOGAppearance (0,1)			
Attribute	M/O	Value	Description
-	O	Free Text	Number of appearances in Olympic / Paralympic Games

Element: Organisation /Language /Participation (0,1) /Summary (0,1)			
Attribute	M/O	Value	Description
-	O	Free Text with a maximum length of 15000 characters.	Free Text with the summary of Olympic / Paralympic Games appearances

### 2.1.40.6 Message sort

There is no specific sorting for this message

## 2.1.41 NOC/NPC Biography Import

### 2.1.41.1 Description

The NOC/NPC Biography Import is a message containing the biography of one NOC/NPC.

The message resets the previous NOC/NPC Biography Import information. There is only one biography per message.

Note that this message is not distributed and only used to initialise the central systems from the data provider.

### 2.1.41.2 Header Values

The following table describes the ODF header attributes

Attribute	Value	Comment
CompetitionCode	<a href="#">CC @Competition</a>	Unique ID for competition
DocumentCode	S(20) with no leading zeroes	Organisation's external ID Biography. This ID will start with "N".
DocumentType	DT_BIO_NOC_IMP	NOC/NPC Biography Import
Version	1...V	Version number associated to the message's content. Ascendant number
Language	<a href="#">CC @Language</a>	Language code
FeedFlag	"P"-Production "T"-Test	Refer to the ODF header definition
Date	Date	Refer to the ODF header definition
Time	Time	Refer to the ODF header definition
LogicalDate	Date	Refer to the ODF header definition

### 2.1.41.3 Trigger and Frequency

Message is provided to the OCOG some months before games.

### 2.1.41.4 Message Structure

It has the same attributes and elements as in the NOC/NPC Biography message (except for @Code), and adding the attributes/elements that are marked with an asterisk (\*).

### 2.1.41.5 Message Values

Element: Competition /Organisation			
Attribute	M/O	Value	Description
ExternalCode	M	S(20) with no leading zeroes	Organisation's Biography external ID. It is the same as in the @DocumentCode header's attribute. This ID starts with "N".
Name	M	S(20)	Organisation Name

### 2.1.41.6 Message sort

There is not a special sorting for this message.

## 2.1.42 Horse Biography

### 2.1.42.1 Description

The Horse Biography message contains the Horse information.

The message resets the previous Horse's information. There is only one Horse per message.

### 2.1.42.2 Header Values

The following table describes the ODF header attributes

Attribute	Value	Comment
CompetitionCode	CC @Competition	Unique ID for competition
DocumentCode	CC @Discipline	Message used only in Equestrian Disciplines Full RSC of the Discipline
DocumentSubcode	S(20) with no leading zeroes	Horse's ID
DocumentType	DT_BIO_HOR	Horse's Biography
Version	1...V	Version number associated to the message's content. Ascendant number
Language	CC @Language	Language code
FeedFlag	"P"-Production "T"-Test	Refer to the ODF header definition
Date	Date	Refer to the ODF header definition
Time	Time	Refer to the ODF header definition
LogicalDate	Date	Refer to the ODF header definition
Source	<a href="#">SC @Source</a>	Code indicating the system which generated the message.

### 2.1.42.3 Trigger and Frequency

These messages will be available the first day of the press operations, including the complete bulk information known up to that moment

### 2.1.42.4 Message Structure

The following elements describe the message structure from the OdfBody element.

The elements that are optional in this message are:

- GInterest

Level 1	Level 2	Level 3	Level 4	Level 5	Level 6
Competition (0,1)					
	Gen Sport Codes				
		HorseBiography (1,1)			



Level 1	Level 2	Level 3	Level 4	Level 5	Level 6
		Code Organisation Sex Current Height CountryofBirth Dam StudBook Breeder FormerName FormerRider ModificationIndicator ExternalCode (*) Name (*) YearBirth (*) Passport (*) ColourCode (*) BreedCode (*) Sire (*) Owner (*) SecondOwner (*) Groom (*) Language			
			Language GInterest (0,1)		
				MajorAchievements (1,1)	
					-
		Discipline (*)			
			Code (*)		

Table Note: (\*) Field needed when the message is used to import data into the Info Diffusion System.

### 2.1.42.5 Message Values

Element: Competition (0,1)			
Attribute	M/O	Value	Description
Gen	O	S(20)	Version of the General Data Dictionary applicable to the message
Sport	O	S(20)	Version of the Sport Data Dictionary applicable to the message
Codes	O	S(20)	Version of the Codes applicable to the message

Element: HorseBiography (1,1)			
Attribute	M/O	Value	Description
Code	M	S(20) with no leading zeroes	Horse's ID
Organisation	M	<a href="#">CC @Organisation</a>	Horse's organisation
Sex	M	<a href="#">CC @HorseSex</a>	Horse's sex.
Height	O	Numeric ###	Height in cms
CountryofBirth	O	<a href="#">CC @Country</a>	Country ID of Birth
Dam	O	S(25)	Dam Name
StudBook	O	S(120)	Stud book Name
Breeder	O	S(120)	Breeder Name
FormerName	O	S(120)	Former Name
FormerRider	O	S(120)	Former Rider Name
ModificationIndicator	O	S(1)	Send only to delete or unpublish a biography, when needed send D for Delete.

Element: HorseBiography /Language			
Attribute	M/O	Value	Description
Language	M	<a href="#">CC @Language</a>	Language code

Element: HorseBiography /Language /GInterest (0,1) /MajorAchievements			
Attribute	M/O	Value	Description
-	O	Free text	Free Text with Major Achievements

### 2.1.42.6 Message sort

There is no specific sorting for this message

## 2.1.43 Horse Biography Import

### 2.1.43.1 Description

The Horse Biography Import is a message containing the biography of one Horse.

The message resets the previous Horse Biography Import information. There is only one biography per message.

Note that this message is not distributed and only used to initialise the central systems from the data provider.

### 2.1.43.2 Header Values

The following table describes the ODF header attributes

Attribute	Value	Comment
CompetitionCode	<a href="#">CC @Competition</a>	Unique ID for competition
DocumentCode	S(20) with no leading zeroes	Horse's external ID Biography. This ID will start with "H".
DocumentType	DT_BIO_HOR_IMP	Horse's Biography Import
Version	1...V	Version number associated to the message's content. Ascendant number
Language	<a href="#">CC @Language</a>	Language code
FeedFlag	"P"-Production "T"-Test	Refer to the ODF header definition
Date	Date	Refer to the ODF header definition
Time	Time	Refer to the ODF header definition
LogicalDate	Date	Refer to the ODF header definition

### 2.1.43.3 Trigger and Frequency

Message is provided to the OCOG some months before games.

### 2.1.43.4 Message Structure

It has the same attributes and elements as in the Horse Biography message (except for @Code), and adding the attributes/elements that are marked with an asterisk (\*).





### 2.1.43.5 Message Values

Element: Competition (0,1)			
Attribute	M/O	Value	Description
Gen	O	S(20)	Version of the General Data Dictionary applicable to the message
Sport	O	S(20)	Version of the Sport Data Dictionary applicable to the message
Codes	O	S(20)	Version of the Codes applicable to the message

Element: HorseBiography			
Attribute	M/O	Value	Description
ExternalCode	M	S(20) with no leading zeroes	Horse's external ID biography. It is the same as in the @DocumentCode header's attribute. This ID will start with "H".
Name	M	S(25)	Horse's name in upper case.
YearBirth	M	Numeric ####	Horse's year of birth.
Passport	O	S(12)	Horse's passport. Send if the information is available
ColourCode	O	<a href="#">CC @HorseColour</a>	Horse's colour code. Send if the information is available
BreedCode	O	<a href="#">CC @HorseBreed</a>	Horse's breed code. Send if the information is available
Sire	O	S(25)	Horse's sire. Send if the information is available. The content is in upper case.
Owner	O	S(35)	Horse's first owner. Send if the information is available. The content is in upper case.
SecondOwner	O	S(35)	Horse's second owner. Send if this information is available. The content is in upper case.
Groom	O	S(35)	Horse's groom. Send if the information is available. The content is in upper case.

Element: HorseBiography /Discipline			
Attribute	M/O	Value	Description
Code	M	CC @Discipline	Full RSC Discipline code

### 2.1.43.6 Message sort

There is not a special sorting for this message.

## 2.1.44 Flagbearers

### 2.1.44.1 Description

The flagbearers message contains the list of flagbearers for either the opening or closing ceremony of a competition.

The flagbearers message is always a complete message that increments its content as more information is available. The arrival of this message resets the entire previous flagbearers information.

### 2.1.44.2 Header Values

The following table describes the ODF header attributes

Attribute	Value	Comment
CompetitionCode	CC @Competition	Unique ID for competition
DocumentCode	CC @Event	Full RSC of the ceremony (Event level)
DocumentType	DT_FLAGBEARERS	Flagbearers
Version	1...V	Version number associated to the message's content. Ascendant number
FeedFlag	"P"-Production "T"-Test	Refer to the ODF header definition
Date	Date	Date when the message is generated, expressed in the local time zone where the message was produced.
Time	Time	Time up to milliseconds when the message is generated, expressed in the local time zone where the message was produced.
LogicalDate	Date	<p>Logical Date of events. This is the same as the physical day except when the unit or message transmission extends after midnight.</p> <p>If an event unit continues after midnight (24:00), all messages produced will be considered as happening at the logical date on which the event unit began (e.g. for a session which began at 21:00 on Aug 2 and ended at 1:20 on Aug 3, the message will all be dated Aug 2).</p> <p>The end of the logical day is defined by default at 03:00 a.m.</p> <p>For messages corrections, like invalidating medals or Records, it will be the LogicalDate of the day of the correction.</p> <p>Logical Date is expressed in the local time zone where the message was produced.</p>
Source	SC @Source	Code indicating the system which generated the message.

### 2.1.44.3 Trigger and Frequency

Flagbearers message is only sent manually and is triggered by the content owner.



### 2.1.44.4 Message Structure

The following elements describe the message structure from the OdfBody element.

Level 1	Level 2	Level 3	Level 4	Level 5	Level 6	Level 7	Level 8	Level 9	Level 10
Competition (0,1)	Gen Sport Codes	ExtendedInfos (0,1)	ExtendedInfo (1,N)	Type Code Pos Value	Extension (0,N)	Code Pos Value			
	Ceremony (1,N)	Order Organisation Volunteer Embargo Comment Flagbearer (0,N)		Code Discipline Description (0,1)		GivenName FamilyName Gender			

### 2.1.44.5 Message Values

Element: Competition (0,1)			
Attribute	M/O	Value	Description
Gen	O	S(20)	Version of the General Data Dictionary applicable to the message
Sport	O	S(20)	Version of the Sport Data Dictionary applicable to the message
Codes	O	S(20)	Version of the Codes applicable to the message

Element: ExtendedInfos /ExtendedInfo (1,N)			
Attribute	M/O	Value	Description
Type	O	Possible extensions	
Code	O	Possible extensions	
Pos	O	Possible extensions	
Value	O	Possible extensions	

Element: ExtendedInfos /ExtendedInfo /Extension (0,N)			
Attribute	M/O	Value	Description
Code	O	Possible extensions	
Pos	O	Possible extensions	
Value	O	Possible extensions	



Element: Ceremony (1,N)			
Discipline information			
Attribute	M/O	Value	Description
Order	M	Numeric ##0	Order of the organisation in the ceremony
Organisation	M	CC @Organisation	Competitors' organisation
Volunteer	O	S(1)	Send "Y" if a Volunteer is to be used
Embargo	O	DateTime	The time when the information can be released, no longer under embargo. NOTE: this is only included in the message if the embargo time is after the message time, do not include if the embargo time has passed.
Comment	O	S(100)	Free text for comments if applicable. Used for exceptional circumstances. Not expected if athlete ID(s) exist(s).

Element: Ceremony /Flagbearer (0,N)			
Attribute	M/O	Value	Description
Code	M	S(20) with no leading zeroes	Athlete ID
Discipline	O	CC @Discipline	Full RSC of the discipline of the athlete, S(34)

Element: Ceremony /Flagbearer /Description (0,1)			
Attribute	M/O	Value	Description
GivenName	O	S(25)	Given name in WNPA format (mixed case)
FamilyName	M	S(25)	Family name in WNPA format (mixed case)
Gender	M	CC @PersonGender	Gender of the athlete

### 2.1.44.6 Sample

```
<?xml version="1.0" encoding="utf-8"?>
<OdfBody CompetitionCode="OG2020" DocumentType="DT_FLAGBEARER" DocumentCode="CER-
OPENING-----" Time="094703387" Source="OMS" Date="2020-09-22" LogicalDate="2020-09-
22" FeedFlag="P" Version="2" >
<Competition>
  <Ceremony Order="1" Organisation="GRE" >
    <Flagbearer Code="123456" Discipline="TKW-----"/>
    <Description GivenName="Alexandros" FamilyName="Nikolaidis" Gender="M" />
  </Flagbearer>
</Ceremony>
  <Ceremony Order="2" Organisation="ARG" Embargo="2020-09-22T15:00:00+08:00">
    <Flagbearer Code="123466" Discipline="ATH-----"/>
    <Description GivenName="John" FamilyName="Smith" Gender="M" />
  </Flagbearer>
    <Flagbearer Code="123400" Discipline="SAL-----"/>
    <Description GivenName="Jane" FamilyName="Brown" Gender="F" />
  </Flagbearer>
</Ceremony>
  <Ceremony Order="3" Organisation="AUT" Volunteer="Y"/>
  ...
  <Ceremony Order="55" Organisation="COR" Comment="SMITH Jane and WHITE John"/>
  ...
</Competition>
</OdfBody>
```

### 2.1.44.7 Message sort

Order by Ceremony/Order

## 2.1.45 Alert

### 2.1.45.1 Description

The Alert message contains one individual alert and notifies users of important information.

### 2.1.45.2 Header Values

The following table describes the ODF header attributes

Attribute	Value	Comment
CompetitionCode	CC @Competition	Unique ID for competition
DocumentCode	CC @Discipline	Full RSC at any level for RESULTS else at discipline level Use GEN----- if the notification is not applicable to a single discipline.
DocumentSubcode	S(34)	ID of the information
DocumentType	DT_ALERT	Alert
DocumentSubtype	TICKER NEWS RESULTS SERVICE	TICKER for the information from CIS Tickers NEWS is for alerts generated by OIS including News alerts, Records, Official Communications, Press Conference changes etc. RESULTS for results based alerts from OVR (for publication) SERVICE for information related to the ODF service generated by ODF feed support team (not for publication.)
Version	1...V	Version number associated to the message's content. Ascendant number
Language	CC @Language	Language code
FeedFlag	"P"-Production "T"-Test	Refer to the ODF header definition
Date	Date	Refer to the ODF header definition
Time	Time	Refer to the ODF header definition
LogicalDate	Date	Refer to the ODF header definition
Source	SC @Source	Code indicating the system which generated the message.

### 2.1.45.3 Trigger and Frequency

For TICKER, triggered by CIS operator when appropriate information is entered in the CIS Ticker.

For RESULTS, triggered manually when an update about an unexpected situation related to competition progression or results related information needs to be distributed to ODF clients quickly.

For SERVICE, triggered manually as required.

### 2.1.45.4 Message Structure

The following elements describe the message structure from the OdfBody element.

Level 1	Level 2	Level 3	Level 4
Competition (0,1)			
	Gen Sport Codes		
	Document (1,1)		
		Code Parent ModificationIndicator Message	
			-

Table Note: (\*) Field needed when the message is used to import data into the Info Diffusion System.



### 2.1.45.5 Message Values

Element: Competition (0,1)			
Attribute	M/O	Value	Description
Gen	O	S(20)	Version of the General Data Dictionary applicable to the message
Sport	O	S(20)	Version of the Sport Data Dictionary applicable to the message
Codes	O	S(20)	Version of the Codes applicable to the message

Element: Document (1,1)			
Attribute	M/O	Value	Description
Code	O	S(10)	Only included for DocumentSubtype = RESULTS and the text of the alert is NOT free text. This is the code for the alert where a code exists (not used for free text). This is used to translate the alert.
Parent	M	S(34) <sup>4</sup>	Parent's ID. If the report has no parent ID then it takes value 0. (Always 0 for TICKER) Only applicable if language <> ENG then the Parent ID = ID of ENG document.
ModificationIndicator	O	S(1)	Send only to delete or unpublish information, when needed send D for Delete. Not applicable to SERVICE

Element: Document /Message			
Attribute	M/O	Value	Description
-	O	S(4000)	Text of the Alert In the case of DocumentSubtype = RESULTS this is the long description in ENG related to the code (if exists, else any free text)

### 2.1.45.6 Sample

```
<OdfBody CompetitionCode="OG2012" DocumentCode="SYN-----"
DocumentSubcode="1" DocumentType="DT_ALERT" DocumentSubtype="TICKER" Version="2" Language="ENG"
FeedFlag="P" Date="2012-08-06" Time="174130012" LogicalDate="2012-08-06" Source="PDC">
  <Competition>
    <Document Parent="0" >
      <Message>
        <![CDATA[New Notificacion]]>
      </Message>
    </Document>
  </Competition>
</OdfBody>
```

### 2.1.45.7 Message sort

There is no specific sorting for this message

<sup>4</sup> Parent: Breaking News Documents are originally created in English. If Press Operation staff considers interesting to translate any report, the translations are created from the English one. @Parent links to the DocumentSubcode of the English version for translated messages. Example: English version. DocumentSubcode = "1230", then French translation -> @Parent="1230"

## 2.1.46 TV Tracking

### 2.1.46.1 Description

The TV Tracking message alerts users as to which event unit or activity is currently the focus of the integrated TV production. This message only applies in athletics, artistic gymnastics and ceremonies.

### 2.1.46.2 Header Values

The following table describes the ODF header attributes

Attribute	Value	Comment
CompetitionCode	CC @Competition	Unique ID for competition
DocumentCode	CC @Event	Full RSC at event level. Event only applicable in Ceremonies otherwise discipline level.
DocumentType	DT_TV_TRACKING	TV Tracking Message
Version	1..V	Version number associated to the message's content. Ascendant number
Language	CC @Language	Language code
FeedFlag	"P"-Production "T"-Test	Refer to the ODF header definition
Date	Date	Refer to the ODF header definition
Time	Time	Refer to the ODF header definition
LogicalDate	Date	Refer to the ODF header definition
Source	<a href="#">SC @Source</a>	Code indicating the system which generated the message.

### 2.1.46.3 Trigger and Frequency

The message triggered with each change to a new activity or unit in the current discipline.

### 2.1.46.4 Message Structure

The following elements describe the message structure from the OdfBody element.

Level 1	Level 2	Level 3	Level 4	Level 5
Competition (0,1)	Gen Sport Codes ExtendedInfos (0,1)	ExtendedInfo (0,N)	Type Code Pos Value Extension (0,N)	Code Pos Value



### 2.1.46.5 Message Values

Element: Competition (0,1)			
Attribute	M/O	Value	Description
Gen	O	S(20)	Version of the General Data Dictionary applicable to the message
Sport	O	S(20)	Version of the Sport Data Dictionary applicable to the message
Codes	O	S(20)	Version of the Codes applicable to the message

Element: ExtendedInfos (0,1) /ExtendedInfo (0,N)			
Attribute	M/O	Value	Description
Type			See extended definition if applicable
Code			
Pos			
Value			

Element: ExtendedInfos /ExtendedInfo /Extension (0,N)			
Attribute	M/O	Value	Description
Code			See extended definition if applicable
Pos			
Value			

The following table describes in more detail the ExtendedInfo.

Type	Code	Pos	Value	Description	Expected	
EI	UNIT		S(9)	For @Type: Send proposed type	In athletics when changing to a new unit. In gymnastics when changing to a new apparatus.	
				For @Code: Send proposed code		
				For @Pos: Do not send anything		
				For @Value: The RSC of the current unit in CIS TV Tracking. In athletics it is the unit, in gymnastics it will be the apparatus (phase and unit 000)		
	ACTIVITY		S(100)	For @Type: Send proposed type		In Ceremonies when changing to a new activity.
				For @Code: Send proposed code		
				For @Pos: Do not send anything		
				For @Value: Title of the current CIS TV Tracking activity in ceremonies.		
	NOC		CC @NOC	For @Type: Send proposed type		In Ceremonies when changing to a single selected NOC.
				For @Code: Send proposed code		
				For @Pos: Do not send anything		



			For @Value: The NOC code of the current NOC in CIS TV Tracking if a single NOC is selected in ceremonies.	
--	--	--	---	--

### 2.1.46.6 Sample

#### Athletics

```
<OdfBody CompetitionCode="OG2016" DocumentCode="ATH-----"
DocumentType="DT_TV_TRACKING" FeedFlag="P" Date="2016-07-31" LogicalDate="2016-07-31"
Time="101314696" Source="PDC" Version="25">
<Competition>
<ExtendedInfos>
<ExtendedInfo Type="EI" Code="UNIT" Value="ATHM100M-----FNL-0001----"/>
</ExtendedInfos>
</Competition>
</OdfBody>
```

#### Artistic Gymnastics

```
<OdfBody CompetitionCode="OG2016" DocumentCode="GAR-----" DocumentType="
DT_TV_TRACKING " FeedFlag="P" Date="2016-07-31" LogicalDate="2016-07-31" Time="101314696"
Source="PDC" Version="25">
<Competition>
<ExtendedInfos>
<ExtendedInfo Type="EI" Code="UNIT" Value="GARMVAULT-----"/>
</ExtendedInfos>
</Competition>
</OdfBody>
```

#### Ceremonies (Activities)

```
<OdfBody CompetitionCode="OG2016" DocumentCode="CER-OPENING-----"
DocumentType="DT_TV_TRACKING " FeedFlag="P" Date="2016-07-31" LogicalDate="2016-07-31"
Time="101314696" Source="PDC" Version="25">
<Competition>
<ExtendedInfos>
<ExtendedInfo Type="EI" Code="ACTIVITY" Value="Bach Speech" />
</ExtendedInfos>
</Competition>
</OdfBody>
```

#### Ceremonies (March)

```
<OdfBody CompetitionCode="OG2016" DocumentCode="CER-OPENING-----"
DocumentType="DT_TV_TRACKING" FeedFlag="P" Date="2016-07-31" LogicalDate="2016-07-31"
Time="101314696" Source="PDC" Version="25">
<Competition>
<ExtendedInfos>
<ExtendedInfo Type="EI" Code="NOC" Value="ESP" />
</ExtendedInfos>
</Competition>
</OdfBody>
```

### 2.1.46.7 Message sort

There is no specific sorting for this message

## 2.1.47 News Document



### 2.1.47.1 Description

The News Document message contains individual news.

The message resets the previous news. Each message includes one news document.

### 2.1.47.2 Header Values

The following table describes the ODF header attributes

Attribute	Value	Comment
CompetitionCode	CC @Competition	Unique ID for competition
DocumentCode	CC @Discipline	Full RSC at the discipline level
DocumentSubcode	S(34)	News' ID
DocumentType	DT_NEWS	News Document
DocumentSubtype	CC @NewsReport	News Subtype (Code of application Criteria level 2), that is code of the item type like FQ for Flash Quotes.
Version	1...V	Version number associated to the message's content. Ascendant number
Language	<a href="#">CC @Language</a>	Language code
FeedFlag	"P"-Production "T"-Test	Refer to the ODF header definition
Date	Date	Refer to the ODF header definition
Time	Time	Refer to the ODF header definition
LogicalDate	Date	Refer to the ODF header definition
Source	<a href="#">SC @Source</a>	Code indicating the system which generated the message.

### 2.1.47.3 Trigger and Frequency

Trigger every time that a news document is published.

### 2.1.47.4 Message Structure

The following elements describe the message structure from the OdfBody element.

Level 1	Level 2	Level 3	Level 4	Level 5	Level 6
Competition (0,1)	Gen Sport Codes	Document (1,1)	Parent ExternalCode Category CategoryName Item ItemName ItemDate ItemTime Unit ModificationIndicator	Related (0,1)	Athlete (0,N)



Level 1	Level 2	Level 3	Level 4	Level 5	Level 6
				Code Order Bib Description (0,1)	
					GivenName FamilyName Gender Organisation BirthDate IFId
			Coach (0,N)	Code Function Order Description (0,1)	
					GivenName FamilyName Gender Nationality
			Team (0,N)	Code Order Description (0,1)	
					TeamName IFId
	Title				
	Body		-		

### 2.1.47.5 Message Values

Element: Competition (0,1)			
Attribute	M/O	Value	Description
Gen	O	S(20)	Version of the General Data Dictionary applicable to the message
Sport	O	S(20)	Version of the Sport Data Dictionary applicable to the message
Codes	O	S(20)	Version of the Codes applicable to the message



Element: Document (1,1)			
Attribute	M/O	Value	Description
Parent	M	S(34) <sup>5</sup>	Parent's ID. If the report has no parent ID then it takes value 0.
ExternalCode	O	S(10)	External Identifier for the News article. This is only Mandatory for DT_NEWS_IMP
Category	M	CC @NewsSport	Code of application Criteria level 1 (usually sport but may be other categories)
CategoryName	M	S(40)	Category Name
Item	M	CC @NewsReport	News Subtype (Code of application Criteria level 2), that is code of the item type like FQ for Flash Quotes.
ItemName	M	S(40)	Item Name
ItemDate	O	Date	Date of publication or re-publication of the news item. Not required for import or ModificationIndicator="D" otherwise it is required.
ItemTime	O	Time	Time of publication or re-publication of the news item. Not required for import or ModificationIndicator="D" otherwise it is required..
Unit	O	CC @Unit	Full RSC of the Unit (can be Event, Phase or Unit level)
ModificationIndicator	O	S(1)	Send only to delete or unpublish an article, when needed send D for Delete.

Element: Document /Related (0,1) /Athlete (0,N)			
Attribute	M/O	Value	Description
Code	M	S(20) with no leading zeroes	Athlete's ID.
Order	M	Numeric	Order attribute used to sort the athletes
Bib	O	String	Bib number

Element: Document /Related /Athlete /Description (0,1) Athletes extended information, this is required except when ModificationIndicator="D".			
Attribute	M/O	Value	Description
GivenName	O	S(25)	Given name in WNPA format (mixed case)
FamilyName	M	S(25)	Family name in WNPA format (mixed case)
Gender	M	<a href="#">CC @PersonGender</a>	Gender of the athlete
Organisation	M	<a href="#">CC @Organisation</a>	Athletes' organisation
BirthDate	O	Date	Birth date (example: YYYY-MM-DD). Must include if the data is available
IFId	O	S(16)	International Federation ID

Element: Document /Related (0,1) /Coach (0,N)			
Attribute	M/O	Value	Description
Code	O	S(20) with no leading zeroes	Official code. This code is normally expected though there may be rare exceptions.
Function	O	CC @ResultsFunction	Official function
Order	M	Numeric	Coach order

<sup>5</sup> Parent: News Documents are originally created in English. If Press Operation staff considers interesting to translate any report, the translations are created from the English one. @Parent links to the DocumentSubcode of the English version for translated messages. Example: English version -> DocumentSubcode="1230", then French translation -> @Parent="1230"



Element: Document /Related /Coach /Description (0,1) Coach extended information this is required except when ModificationIndicator="D".			
Attribute	M/O	Value	Description
GivenName	O	S(25)	Given name in WNPA format (mixed case)
FamilyName	M	S(25)	Family name in WNPA format (mixed case)
Gender	M	<a href="#">CC @PersonGender</a>	Gender Code
Nationality	M	CC @Country	Coach's nationality

Element: Document /Related (0,1) /Team (0,N)			
Attribute	M/O	Value	Description
Code	O	S(20) with no leading zeroes	Competitor's ID
Order	M	Numeric	Team order

Element: Document /Related /Team /Description (0,1) Team extended information this is required except when ModificationIndicator="D".			
Attribute	M/O	Value	Description
TeamName	M	S(73)	Name of the team. Only applies for teams / groups.
IFId	O	S(16)	International Federation ID

Element: Document /Title			
Attribute	M/O	Value	Description
-	M	Free text <sup>6</sup>	Text describing Document Title

Element: Document /Body			
Attribute	M/O	Value	Description
-	M	Free text <sup>7</sup>	Free Text containing the Body of the HTML article.

### 2.1.47.6 Sample

<sup>6</sup> Codified in UTF-8.

<sup>7</sup> Codified in UTF-8.



INTERNATIONAL  
OLYMPIC  
COMMITTEE

SOG-2020-GEN-2.2 APP

```
<OdfBody CompetitionCode="OG2012" DocumentCode="ATH-----" Time="231728981"
Date="2012-08-04" FeedFlag="P" LogicalDate="2012-08-04" DocumentSubcode="155276" Language="ENG"
DocumentType="DT_NEWS" DocumentSubtype="FQ" Source="IDS" Version="1" >
  <Competition>
    <Document Parent="0" Category="AT" CategoryName="Athletics" Item="FQ" ItemName="Flash Quotes"
ItemDate="2012-08-04" ItemTime="211300000" Unit="ATHMLJ-----">
      <Related>
        <Athlete Code="1077408" Order="1" >
          <Description GivenName="Mitchell" FamilyName="Watt" Gender="M" Organisation="AUS"
BirthDate="1993-12-15" />
        </Athlete>
        <Athlete Code="1077444" Order="2" >
          <Description GivenName="Will" FamilyName="Claye" Gender="M" Organisation="USA"
BirthDate="1992-11-14" />
        </Athlete>
      </Related>
      <Title>Men's Long Jump: WATT (AUS) - Silver, CLAYE (USA) - Bronze</Title>
      <Body>
        <![CDATA[<p>LONDON, 4 August - Comments from silver medallist Mitchell WATT (AUS) and bronze
medallist Will CLAYE (USA) at a media conference following the men's long jump final at the Olympic
Stadium on Saturday.</p>
<p><strong>Mitchell WATT (AUS) - silver</strong></p>
<p><em>On taking silver:</em><br />"There is a reason why the Olympic Games is the pinnacle of our
sport. This is so much sweeter than the silver at the (2011) world championships."</p>
<p><em>On a slow start to the competition:</em><br />"A lot of us will not have got much sleep last
night and the wind was tricky too. It was a whole lot different from a Diamond League meeting. My
run was pretty scrappy in the first three runs and then I was lucky to get one out."</p>
<p><em>On the noise from the crowd:</em><br />"I think my best jump was when Jessica ENNIS (GBR) was
going round doing the 800m and so I thank her for that. I was British for a few moments."</p>
<p><em>On the&nbsp; gold medallist, ;(Greg RUTHERFORD, GBR):</em><br />"He is my closest friend on
the circuit. He had a tough time when he tore his hammy (hamstring, in the qualifying round of the
2011 world championships). He deserved to win. He jumped 8.31 which beats my season's best."</p>
<p><strong>Will CLAYE (USA) - bronze</strong></p>
<p><em>On taking the bronze:</em><br />"I am thankful. I wanted gold but now I will have to get the
gold in the triple (jump)."</p>
<p>"This will help tremendously because I have been on the runway twice now and the triple jump is
my event. I am just going to take these next few days to get my mind and body right to come back on
Tuesday."</p>
<p><em>On support from the crowd:</em><br />"They showed us much love. The crowd was going crazy
with their clapping. They made us feel at home and we are not even from here."</p>
<p>ONS cb/ts/jps/tc</p>]]></Body>
    </Document>
  </Competition>
</OdfBody>
```

### 2.1.47.7 Message sort

There is no specific sorting for this message

## 2.1.48 News Document Import

### 2.1.48.1 Description

The News Document Import is a message containing an individual News Document.

The message resets the previous News Document Import information. There is only one News Document per message.

Note that this message is not distributed and only used to initialise the central systems from the data provider.

### 2.1.48.2 Header Values

The following table describes the ODF header attributes

Attribute	Value	Comment
CompetitionCode	<a href="#">CC @Competition</a>	Unique ID for competition
DocumentCode	S(34)	News' identifier
DocumentType	DT_NEWS_IMP	News Document Import
DocumentSubtype	CC @NewsReport	News Subtype (Code of application Criteria level 2), that is code of the item type like FQ for Flash Quotes.
Version	1..V	Version number associated to the message's content. Ascendant number
Language	<a href="#">CC @Language</a>	Language code
FeedFlag	"P"-Production "T"-Test	Refer to the ODF header definition
Date	Date	Refer to the ODF header definition
Time	Time	Refer to the ODF header definition
LogicalDate	Date	Refer to the ODF header definition

### 2.1.48.3 Trigger and Frequency

Trigger during operation period.

### 2.1.48.4 Message Structure

The structure of the News Document Import message is the same as the News Document message.

### 2.1.48.5 Message Values

All message attributes are the same as the news document message.

### 2.1.48.6 Message sort

There is no specific sorting for this message

## 2.1.49 Transport Document (Shuttle Service)

### 2.1.49.1 Description

The Transport Document (Shuttle Service) message contains individual shuttle services' information.

The message resets the previous shuttle service data. Each message includes one shuttle service.

### 2.1.49.2 Header Values

The following table describes the ODF header attributes

Attribute	Value	Comment
CompetitionCode	<a href="#">CC.@Competition</a>	Unique ID for competition
DocumentCode	GEN-TTT-----	TTT – Type of Shuttle Service (ATH, OFF, MED)
DocumentSubcode	S(34)	Shuttle Service's identifier
DocumentType	DT_TRS	Transport Document
Version	1...V	Version number associated to the message's content. Ascendant number
Language	<a href="#">CC.@Language</a>	Language code
FeedFlag	"P"-Production "T"-Test	Refer to the ODF header definition
Date	Date	Refer to the ODF header definition
Time	Time	Refer to the ODF header definition
LogicalDate	Date	Refer to the ODF header definition
Source	<a href="#">SC.@Source</a>	Code indicating the system which generated the message.

### 2.1.49.3 Trigger and Frequency

Trigger every time that a shuttle service is published.

### 2.1.49.4 Message Structure

The following elements describe the message structure from the OdfBody element.

Level 1	Level 2	Level 3	Level 4
Competition (0,1)	Gen Sport Codes Document (1,1)	Parent ShuttleServiceType ShuttleServiceTypeName LineIdentifier AssociatedVenue (0,N)	Code
		ModificationIndicator Title	
	Body		-
			-





### 2.1.49.5 Message Values

Element: Competition (0,1)			
Attribute	M/O	Value	Description
Gen	O	S(20)	Version of the General Data Dictionary applicable to the message
Sport	O	S(20)	Version of the Sport Data Dictionary applicable to the message
Codes	O	S(20)	Version of the Codes applicable to the message

Element: Document (1,1)			
Attribute	M/O	Value	Description
Parent	M	S(34) <sup>8</sup>	Parent's ID. If the report has no parent, 0
ShuttleServiceType	M	CC @ShuttleServiceType	Code of Shuttle Services Type
ShuttleServiceTypeName	M	S(40)	Shuttle Service Type Name
LineIdentifier	M	S(10)	Shuttle Service's ID

Element: Document /AssociatedVenue (0,N)			
Attribute	M/O	Value	Description
Code	M	<a href="#">CC @VenueCode</a>	Venue code for a venue associated to the Shuttle Service

Element: Document /ModificationIndicator			
Attribute	M/O	Value	Description
ModificationIndicator	O	S(1)	Send only to delete or unpublish an article, when needed send D for Delete.

Element: Document /Title			
Attribute	M/O	Value	Description
-	M	S(100)	Text describing Document Title

Element: Document /Body			
Attribute	M/O	Value	Description
-	M	Free text <sup>9</sup>	Free Text containing the Body of the HTML article.

### 2.1.49.6 Message sort

There is no specific sorting for this message

## 2.1.50 Transport Document Import (Shuttle Service)

### 2.1.50.1 Description

The Transport Document Import (Shuttle Service) is a message containing an individual Transport Document (Shuttle Service).

The message resets the previous Transport Document Import (Shuttle Service). There is only one Transport Document Import (Shuttle Service) per message.

Note that this message is not distributed and only used to initialise the central systems from the data provider.

<sup>8</sup> Parent: Shuttle Service documents are originally created in English. If Press Operation staff considers interesting to translate any report, the translations are created from the English one. @Parent links to the DocumentSubcode of the English version for translated messages. Example: English version -> DocumentSubcode ="1230", then French translation -> @Parent="1230"

<sup>9</sup> Codified in UTF-8.

### 2.1.50.2 Header Values

The following table describes the ODF header attributes

Attribute	Value	Comment
CompetitionCode	<a href="#">CC.@Competition</a>	Unique ID for competition
DocumentCode	S(34)	Shuttle Service's ID.
DocumentType	DT_TRS_IMP	Type of Transport documents
Version	1..V	Version number associated to the message's content. Ascendant number
Language	<a href="#">CC.@Language</a>	Language code
FeedFlag	"P"-Production "T"-Test	Refer to the ODF header definition
Date	Date	Refer to the ODF header definition
Time	Time	Refer to the ODF header definition
LogicalDate	Date	Refer to the ODF header definition

### 2.1.50.3 Trigger and Frequency

Trigger during operation period, and some days before the operation starts.

### 2.1.50.4 Message Structure

The structure of the Transport Document Import (Shuttle Service) message is the same as the Transport Document Import (Shuttle Service).

### 2.1.50.5 Message Values

All message attributes are the same as the Transport Document Import (Shuttle Services) ones.

### 2.1.50.6 Message sort

There is no specific sorting for this message

## 2.1.51 Extended Start List

### 2.1.51.1 Description

The Extended Start List is a message containing the list of competitors for one particular event unit with additional information for each competitor. Competitors could be individual athletes, teams or team members.

It is a generic message for all sports, including as much generic information as possible, considering different types of disciplines and events can have substantial differences (e.g.: mass start lists, line-ups, etc.).

The mandatory attributes and elements defined in this message will have to be used by all the sports. Each ODF Sport Data Dictionary will refine the details of this message with the peculiarities of the discipline.

### 2.1.51.2 Header Values

The following table describes the ODF header attributes

Attribute	Value	Comment
CompetitionCode	CC @Competition	Unique ID for competition
DocumentCode	CC @Unit	Full RSC at Event Unit level (same level as the Start List)
DocumentSubcode		Provides greater granularity for document if DocumentCode is not sufficient.
DocumentType	DT_ESL	Extended Start List
Version	1..V	Version number associated to the message's content. Ascendant number
FeedFlag	"P"-Production "T"-Test	Refer to the ODF header definition
Date	Date	Refer to the ODF header definition
Time	Time	Refer to the ODF header definition
LogicalDate	Date	Refer to the ODF header definition
Source	SC @Source	Code indicating the system which generated the message.

### 2.1.51.3 Trigger and Frequency

Trigger when all the competitors for one particular event unit are known.


For team events, trigger this message when the teams are available for the event unit, and for some disciplines afterwards when team members are also known.

Trigger also after any major change.

If there is any sport-specific requirement, it is detailed in each of the ODF Sport Data Dictionaries.

### 2.1.51.4 Message Structure

The message structure of the Extended Start List is the same as the Start List message, but adding the element ExtCompetitor as optional in the elements Start/Competitor and Start/Competitor/Composition/Athlete (detailed in the next section).

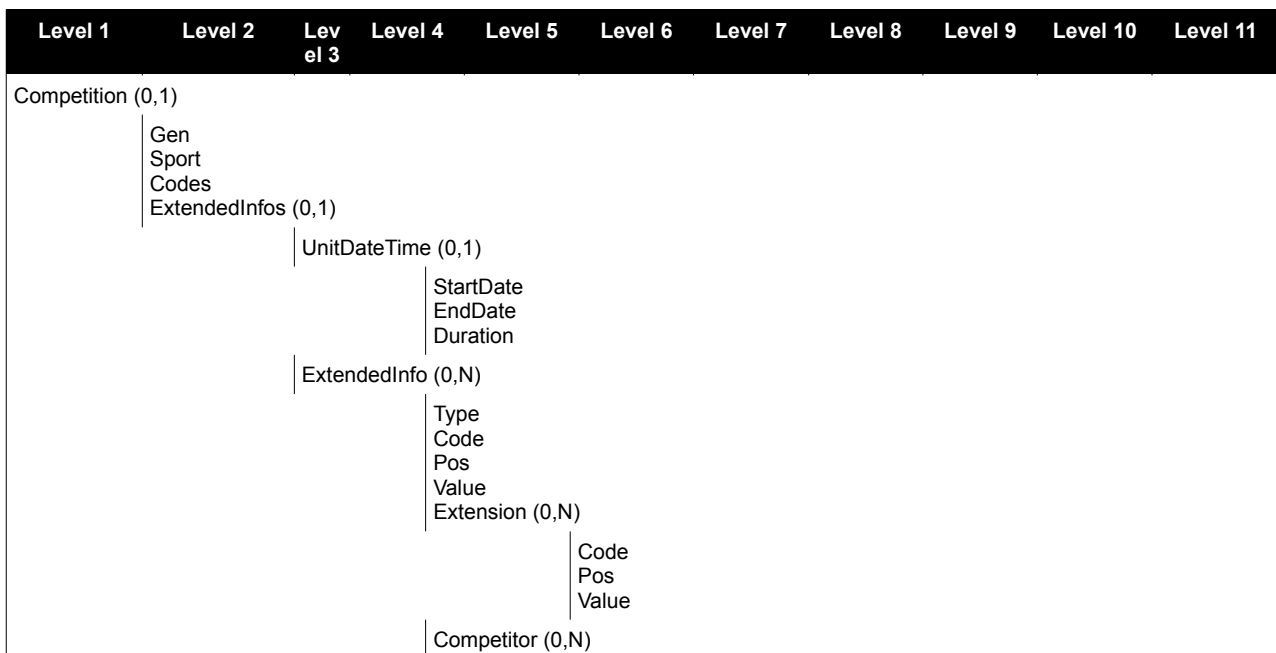



Level 1	Level 2	Level 3	Level 4	Level 5	Level 6	Level 7	Level 8	Level 9	Level 10	Level 11
					Organisation Order Composition					
						Athlete (1,N)				
							FamilyName GivenName			
			SportDescription (0,1)							
				Disciplinename EventName SubEventName Gender UnitNum						
			VenueDescription (0,1)							
				Venue VenueName Location LocationName Attendance						
			PreviousResults (0,N)							
				Code Win Loss Tie						
				PreviousResult (0,N)						
					Unit Order Opponent WLT Result OppResult ResultType IRM					
					ExtendedResults (0,1)					
						ExtendedResult (1,N)				
							Type Code Pos Value			
							Extension (0,N)			
								Code Pos Value		
					Partial (0,N)					
						Code Score OppScore				
	StatsItems (0,1)									
		StatsItem (1,N)								



Level 1	Level 2	Level 3	Level 4	Level 5	Level 6	Level 7	Level 8	Level 9	Level 10	Level 11
				Type Code Position Value Attempt Avg Percent Rank RankEqual SortOrder ExtendedStat (0,N)						
						Code Position Value				
	Officials (0,1)									
		Official (1,N)		Code Function Order Bib Description						
						GivenName FamilyName Gender Organisation IFId ExtendedDescription (1,N)				
							Type Code Pos Value			
					ExtOfficial (0,N)					
						Type Code Pos Value				
	Periods (0,1)									
		Period (1,N)		Code HomeScore AwayScore HomePeriodScore AwayPeriodScore Duration ExtendedPeriods (0,1)						
						ExtendedPeriod (1,N)				
							Code Type Pos Value			
	Result (1,N)									





Level 1	Level 2	Level 3	Level 4	Level 5	Level 6	Level 7	Level 8	Level 9	Level 10	Level 11
								Type Code Pos Value Value2 ValueType IRM Rank RankEqual SortOrder Diff Speed Move Pty Discard Arrive Unchecked Extension		
										Code Pos Value
							RecordIndicators (0,1)		RecordIndicator (1,N)	
								Order Code RecordType Equalled		
		Competitor								
			Code Type Bib Organisation Description (0,1)							
				TeamName IFld ExtendedDescription (0,N)				Type Code Pos Value		
			ExtCompetitor (0,1) (see Table Note) ExtResults (0,1) (see Table Note)							
			-							
			Coaches (0,1)							
				Coach (1,N)				Code Function Order Bib Description		
								GivenName FamilyName Gender Nationality ExtendedDescription (0,N)		
								Type Code Pos Value		







Level 1	Level 2	Level 3	Level 4	Level 5	Level 6	Level 7	Level 8	Level 9	Level 10	Level 11
							Type Code Pos Value			
						ExtendedResults (0,1)				
							ExtendedResult (1,N)			
							Type Code Pos Value Value2 ValueType IRM Rank RankEqual SortOrder Diff Speed Move Pty Discard Arrive Unchecked Extension (0,N)			
										Code Pos Value
						StatsItems (0,1)				
							StatsItem (1,N)			
							Type Code Pos Value Attempt Avg Percent Rank RankEqual SortOrder ExtendedStat (0,N)			
										Code Pos Value
						Team (0,N)				
						Code Order Bib Description (0,1)				
							TeamName IFld ExtendedDescription			
							Type Code Pos Value			
						EventUnitEntry (0,N)				
						Type Code Pos Value				





Level 1	Level 2	Level 3	Level 4	Level 5	Level 6	Level 7	Level 8	Level 9	Level 10	Level 11
										Type Code Pos Value Value2 ValueType IRM Rank RankEqual SortOrder Diff Speed Move Pty Discard Arrive Unchecked Extension (0,N)  Code Pos Value

Table Note: "Results" and "Extended Start List" share the same message's structure and attributes, except for the ExtCompetitor, ExtResults, Club and Coach\_ID (these two last only for Athletes) elements. These are specific elements of the "Extended Start List" message.

### 2.1.51.5 Message Values

All message attributes are the same as the DT\_RESULT (START\_LIST) message, but including the attributes defined below.

Element: Result /Competitor /ExtCompetitor (0,1)			
Attribute	M/O	Value	Description
-	O	Free Text	Team's extended information.

Element: Result /Competitor /ExtResults (0,1)			
Attribute	M/O	Value	Description
-	O	Free Text	Team's extended results information.

Element: Result /Competitor /Composition /Athlete /ExtCompetitor (0,1)			
Attribute	M/O	Value	Description
-	O	Free Text	Athlete or team member's extended information.

Element: Result /Competitor /Composition /Athlete /ExtResults (0,1)			
Attribute	M/O	Value	Description
-	O	Free Text	Athlete or team member's extended Results information.

Element: Result /Competitor /Composition /Athlete /Club (0,1)			
Attribute	M/O	Value	Description
-	O	Free Text	Athlete or team member's club name.

Element: Result /Competitor /Composition /Athlete /Coach (0,1)			
Attribute	M/O	Value	Description
-	O	Free Text	Athlete or team member's coach ID.

### 2.1.51.6 Message sort

Sort according to Result @SortOrder attribute used to sort the results (more detail in each of the ODF Sport Data Dictionaries), and other @Order attributes if used for each of the disciplines.

## 2.1.52 Pictures

### 2.1.52.1 Description

The Pictures message may contains pictures of athletes, coaches or officials depending on the competition and the discipline.

### 2.1.52.2 Header Values

The following table describes the ODF header attributes

Attribute	Value	Comment
CompetitionCode	<a href="#">CC @Competition</a>	Unique ID for competition
DocumentCode	CC @Discipline	Full (Char34) RSC Discipline code for the participant
DocumentSubcode	S(20) with no leading zeroes	Participant's ID (for an athlete, coach or official)
DocumentType	DT_PIC	Picture message
DocumentSubtype	S(20)	ACR for Accreditation Photos (jpg) HEADSHOT for Higher quality photos (png)
Version	1...V	Version number associated to the message's content. Ascendant number
FeedFlag	"P"-Production "T"-Test	Refer to the ODF header definition
Date	Date	Refer to the ODF header definition
Time	Time	Refer to the ODF header definition
LogicalDate	Date	Refer to the ODF header definition
Source	<a href="#">SC @Source</a>	Code indicating the system which generated the message.

### 2.1.52.3 Trigger and Frequency

Trigger the first day of the press operations, and after any change..

### 2.1.52.4 Message Structure

The following elements describe the message structure from the OdfBody element.

Level 1	Level 2	Level 3
Competition (0,1)	Gen Sport Codes Picture	ModificationIndicator ImageType -

### 2.1.52.5 Message Values

Element: Competition (0,1)			
Attribute	M/O	Value	Description
Gen	O	S(20)	Version of the General Data Dictionary applicable to the message
Sport	O	S(20)	Version of the Sport Data Dictionary applicable to the message
Codes	O	S(20)	Version of the Codes applicable to the message

Element: Picture			
Attribute	M/O	Value	Description
ModificationIndicator	O	S(1)	Send only to delete or unpublish an image, when needed send D for Delete.
ImageType	O	S(3)	Image type extension, jpg or png. If this attribute is not included then the image is assumed to be jpg
-	M	Free Text	The Picture element may have a body consisting of one Base64-encoded image.

### 2.1.52.6 Sample

```
<Competition>
<Picture>/9j//2wBDAQcHBwoIChMKChMoGhYaKCgoKCgoKCgoKCgoKCgoKCgoKCgoKCgoKCgoKCgoKCgoKCgoKCgoKCgoKCgoKCgoKCgoKCgoKCgoKCgoKCj/.....kik+UazmiiqGtj/2Q==</Picture>
</Competition>
```

### 2.1.52.7 Message sort

There is no specific sorting for this message.

## 2.1.53 Notification Message

### 2.1.53.1 Description

The Notification message contains a notification about the availability of an online document.

### 2.1.53.2 Header Values

The following table describes the ODF header attributes

Attribute	Value	Comment
CompetitionCode	<a href="#">CC @Competition</a>	Unique ID for competition
DocumentCode	S(34)	Document Code of the online document that is being notified.
DocumentSubcode	S(34)	Document Subcode of the online document that is being notified.
DocumentType	DT_NOTIFICATION	Notification message
DocumentSubtype	S(50)	Concatenation of the Document Type and Document Subtype attributes of the online document that is being notified. This is needed to preserve the Key of the message.
Version	1...V	Version number associated to the message's content. Ascendant number
FeedFlag	"P"-Production "T"-Test	Refer to the ODF header definition
Date	Date	Refer to the ODF header definition
Time	Time	Refer to the ODF header definition
LogicalDate	Date	Refer to the ODF header definition
Source	<a href="#">SC @Source</a>	Code indicating the system which generated the message.

### 2.1.53.3 Trigger and Frequency

Trigger of this message is after the reception of the original message that is made available online.

### 2.1.53.4 Message Structure

The following elements describe the message structure from the OdfBody element.

Level 1	Level 2	Level 3
Competition (0,1)	Gen Sport Codes DirectLink	Link DocumentType DocumentSubtype

### 2.1.53.5 Message Values

Element: Competition (0,1)			
Attribute	M/O	Value	Description
Gen	O	S(20)	Version of the General Data Dictionary applicable to the message
Sport	O	S(20)	Version of the Sport Data Dictionary applicable to the message
Codes	O	S(20)	Version of the Codes applicable to the message

Element: DirectLink			
Attribute	M/O	Value	Description
Link	M	S(255)	URL of the link to the document
DocumentType	M	S(30)	DocumentType of the original message
DocumentSubtype	O	S(20)	DocumentSubtype of the original message

### 2.1.53.6 Sample

```
<Competition>
  <DirectLink Link="https://bif.london2012.com/bif/directaccess/your_doc_here.jpg"
  DocumentType="DT_NOTIFICATION" />
</Competition>
```

### 2.1.53.7 Message sort

There is no specific sorting for this message.

## 2.1.54 Schedule and Results by NOC

### 2.1.54.1 Description

The “Schedule and Results by NOC” message contains this information for a single organisation on a single competition day (between the global GM & GN of the day). It only contains competition activities (Phase Type=Competition). Several disciplines may appear in a single message.

It increments its content as more events units are completed by the organisation during the day, and it always includes all data for the day. The arrival of the message resets the entire previous “Schedule and Results by NOC” information.

Information includes only competitors of the current organisation or all competitors in the case an event unit is Head to Head. It also includes competitors defined as group (Competitor Type = Group). In this case, a group is treated as individual competitors and only includes the athletes of the specific organisation.

The message does not include information about horses, records, coaches, period results and actions.

### 2.1.54.2 Header Values

The following table describes the ODF header attributes.

Attribute	Value	Comment
CompetitionCode	<a href="#">CC @Competition</a>	Unique ID for competition
DocumentCode	GEN-----DAY-dd-----	Global message for all disciplines (sent at daily level, where dd is the Day)
DocumentSubcode	NOC Code	
DocumentType	DT_SCHED_RES_NOC	Schedule and Results by NOC
Version	1..V	Version number associated to the message's content. Ascendant number
FeedFlag	“P”-Production “T”-Test	Refer to the ODF header definition
Date	Date	Refer to the ODF header definition
Time	Time	Refer to the ODF header definition
LogicalDate	Date	Refer to the ODF header definition
Source	<a href="#">SC @Source</a>	Code indicating the system which generated the message.

### 2.1.54.3 Trigger and Frequency

This message is sent multiple times daily after “Global good morning” message has been sent (only for current logical date). The exact frequency is determined at a given competition.

### 2.1.54.4 Message Structure

The following elements describe the message structure from the OdfBody element.

Level 1	Level 2	Level 3	Level 4	Level 5	Level 6	Level 7	Level 8	Level 9
Competition (0,1)	Gen Sport Codes Unit (1,N)	Code PhaseType UnitNum ScheduleStatus StartDate HideStartDate EndDate						



Level 1	Level 2	Level 3	Level 4	Level 5	Level 6	Level 7	Level 8	Level 9
		HideEndDate ActualStartDate ActualEndDate Order Medal Venue Location SessionCode StartText (0,N)						
			Language Value					
		ItemName (1,N)						
			Language Value					
		VenueDescription						
			VenueName LocationName					
		Result (0,N)						
			Rank RankEqual ResultType Result IRM QualificationMark WLT SortOrder StartOrder StartSortOrder Competitor					
				Code Type Bib Organisation Description (0,1)				
					TeamName IFId ExtendedDescription (0,N)			
						Type Code Pos Value		
				Composition (0,1)				
					Athlete (1,N)			
						Code Order Bib Description		
							GivenName FamilyName Gender Organisation BirthDate IFId Class Horse GuideID GuideFamilyName GuideGivenName ExtendedDescription (0,N)	
								Type Code





Level 1	Level 2	Level 3	Level 4	Level 5	Level 6	Level 7	Level 8	Level 9
								Pos Value

### 2.1.54.5 Message Values

The values of the attributes of Result are the same as defined in the Event Unit StartList and Results message.

Element: Competition (0,1)			
Attribute	M/O	Value	Description
Gen	O	S(20)	Version of the General Data Dictionary applicable to the message
Sport	O	S(20)	Version of the Sport Data Dictionary applicable to the message
Codes	O	S(20)	Version of the Codes applicable to the message

Element: Unit (1,N)			
Attribute	M/O	Value	Description
Code	M	CC @Unit	Full RSC of the Unit
PhaseType	M	CC @PhaseType	Phase type for the unit
UnitNum	O	S(15)	Match / Game / Bout / Race Number or similar
ScheduleStatus	M	CC @ScheduleStatus	Schedule status of the Unit
StartDate	O	DateTime	<p>Start date. This attribute may not be sent in the case of some @ScheduleStatus, such as UNSCHEDULED. For other statuses the StartDate is expected otherwise ordering is display is incorrert (including CANCELLED and POSTPONED.</p> <p>This is the scheduled Start date and time and will not be updated when an event unit starts (updated only with RESCHEDULED status)</p> <p>Where HideStartDate=?Y? then this should be filled with the session start time or the start time of a group of units for all similar units and Order used for sorting.</p> <p>Example: 2006-02-26T10:00:00+01:00</p>
HideStartDate	O	S(1)	<p>SSend 'Y' if StartDate (scheduled start time) should not be displayed. It may be an estimate or 'fake' time. Do not send if StartDate (scheduled start time) is to be displayed.</p> <p>Start times of some units depend on the finalisation of previous event units and therefore there is no fixed start time in these cases this field is set to 'Y'.</p> <p>When the flag is set to 'Y' then the time is used for sorting purposes but should not be displayed.</p>
EndDate	O	DateTime	<p>End date. This attribute may not be sent in the case of some Unit@Status, such as those meaning cancelled, postponed.</p> <p>Example: 2006-02-26T10:00:00+01:00</p>
HideEndDate	O	S(1)	<p>Send 'Y' if EndDate scheduled end time is not to be displayed.</p> <p>Some event units have a scheduled end time well bounded, however, some event units in some circumstances have a scheduled end time not quite variable (example, some press conferences or tennis matches, etc.) in these cases this field is set to 'Y' and should not be displayed.</p>
ActualStartDate	O	DateTime	<p>This attribute is expected once the event unit has started. Example: 2006-02-26T10:03:22+01:00</p>



Element: Unit (1,N)			
Attribute	M/O	Value	Description
ActualEndDate	O	DateTime	This attribute is expected once the event unit has finished. Example: 2006-02-26T12:43:51+01:00
Order	O	Numeric ###0	Order of the units when displayed. This field is only considered if HideStartDate = 'Y'. It should not be sent in sports which never use this concept but should be sent for all units where the concept is used. Starts at 1 in each session each day.
Medal	O	<a href="#">SC @UnitMedalType</a>	Indicator of medal awarded for this unit. Do not send if not a medal event unit
Venue	O	<a href="#">CC @VenueCode</a>	Venue where the unit takes place Mandatory unless unscheduled Can use TBD if the Venue is not known yet (CC).
Location	O	<a href="#">CC @Location</a>	Location where the unit takes place Mandatory unless unscheduled Can use TBD if the Location is not known yet (CC) or a generic code for the discipline.
SessionCode	O	S(5)	Code of the sports competition session which contains this event unit. Usually in the format DDD00 where DDD is the discipline and 00 is the session number within the discipline. For example ARC02 for the second session in Archery.

Element: Unit /EstimatedStartText (0,N)			
Attribute	M/O	Value	Description
Language	M	<a href="#">CC @Language</a>	Code Language of the @Value
Value	M	S(20)	Text that explains when the Start Time is in the case that StartDate is an estimation (i.e. "After M.1")

Element: Unit /ItemName (1,N)			
Attribute	M/O	Value	Description
Language	M	<a href="#">CC @Language</a>	Code Language of the @Value
Value	M	S(40)	Unit name

Element: Unit /VenueDescription			
Attribute	M/O	Value	Description
VenueName	M	S(25)	Venue name in first language. This is the CC value from unit/venue
LocationName	M	S(30)	Location name in first language. This is the CC value from unit/location.



Element: Unit/ Result (0,N)			
Attribute	M/O	Value	Description
Rank	O	Text	Rank of the competitor in the result.
RankEqual	O	S(1)	Equalled rank indicator. Send "Y" if rank equalled else do not send.
ResultType	O	Same as in the Event Unit Results message for each discipline	Type of the @Result attribute
Result	O	Same as in the Event Unit Results message for each discipline	The result of the competitor in the event unit
IRM	O	Same as in the Event Unit Results message for each discipline	The invalid rank mark, in case it is assigned
QualificationMark	O	Same as in the Event Unit Results message for each discipline	Indication of the qualification of the competitor for the next round of the competition
WLT	O	Same as in the Event Unit Results message for each discipline	In head to head units: W-Won L-Lost T-Tied
SortOrder	O	Same as in the Event Unit Results message for each discipline	Used to sort all results in an event unit. Prior to the competition it is the same as StartSortOrder.
StartOrder	O	Same as in the Start List message for each discipline	Competitor's start order
StartSortOrder	M	Same as the SortOrder in the Start List message for each discipline	Used to sort all start list competitors in an event unit

Element: Unit/ Result /Competitor			
Attribute	M/O	Value	Description
Code	M	S(20) with no leading zeroes	Competitor's ID
Type	M	S(1)	T - Team A - Athlete G - Group
Bib	O	Same as in the Start List message for each discipline	Bib number
Organisation	O	<a href="#">CC @Organisation</a>	Should be sent when known.

Element: Unit/ Result /Competitor /Description (0,1)			
Attribute	M/O	Value	Description
TeamName	M	S(73)	Name of the team. Only applies for teams / groups. Not usually for pairs (figure skating & beach volleyball are the exceptions).
IFId	O	S(16)	International Federation ID

Element: Unit/ Result /Competitor /Description /ExtendedDescription (0,N)			
Attribute	M/O	Value	Description
Type	M		See sport descriptions
Code	M		See sport descriptions
Pos	O		See sport descriptions
Value	O		See sport descriptions



Element: Unit/ Result /Competitor /Composition (0,1) /Athlete (1,N)			
Attribute	M/O	Value	Description
Code	M	S(20) with no leading zeroes	Athlete's ID (team member or individual athlete)
Order	M	Numeric	Order attribute used to sort team members in a team (if Competitor @Type="T") or 1 if Competitor @Type="A".
Bib	O	Same as in the Start List message for each discipline	Bib number

Element: Unit/ Result /Competitor /Composition /Athlete /Description			
Attribute	M/O	Value	Description
GivenName	O	S(25)	Given name in WNPA format (mixed case)
FamilyName	M	S(25)	Family name in WNPA format (mixed case)
Gender	M	<a href="#">CC @PersonGender</a>	Gender of the athlete
Organisation	M	<a href="#">CC @Organisation</a>	Athletes' organisation
BirthDate	O	Date	Birth date (example: YYYY-MM-DD). Must include if the data is available
IFId	O	S(16)	International Federation ID
Class	O	<a href="#">CC @SportClass</a>	Code to identify the sport class of the athletes with a disability (e.g. Paralympic Games)
Horse	O	S(25)	Name of the athlete's horse
GuideID	O	S(20) without leading zeros	ID of the Guide, used for some athletes with a disability (e.g. Paralympic Games).
GuideFamilyName	O	S(25)	Family Name of the athlete's guide (mixed case). Used for some athletes with a disability (e.g. Paralympic Games).
GuideGivenName	O	S(25)	Given Name of the athlete's guide (mixed case). Used for some athletes with a disability (e.g. Paralympic Games).

Element: Unit/ Result /Competitor /Composition /Athlete /Description /ExtendedDescription (0,N)			
Attribute	M/O	Value	Description
Type	M		See sport descriptions
Code	M		See sport descriptions
Pos	O		See sport descriptions
Value	O		See sport descriptions

### 2.1.54.6 Message sort

Unit @StartDate is the attribute used to sort the Units.

Result @SortOrder will be the attribute used to sort the results. This attribute is refined in each of the ODF Sport Data Dictionaries.

## 2.1.55 List of Codes

### 2.1.55.1 Description

This is a simple message listing the codes used in a competition.

The data included in this message will be available as soon as practical and will usually be available in additional formats to this XML message.

### 2.1.55.2 Header Values

The following table describes the ODF header attributes.

Attribute	Value	Comment
CompetitionCode	<a href="#">CC_@Competition</a>	Unique ID for competition
DocumentCode	GEN-----	Fixed value
DocumentType	DT_CODES	List of codes
DocumentSubtype	CC_@CodeSet	Code to define which code set is included in the message
Version	1..V	Version number associated to the message's content. Ascendant number
FeedFlag	"P"-Production "T"-Test	Refer to the ODF header definition
Date	Date	Refer to the ODF header definition
Time	Time	Refer to the ODF header definition
LogicalDate	Date	Refer to the ODF header definition
Source	<a href="#">SC_@Source</a>	Code indicating the system which generated the message.


### 2.1.55.3 Trigger and Frequency

The DT\_CODES message is sent as soon as the data and connectivity are available and will be resent with every update.



### 2.1.55.4 Message Structure

The following elements describe the message structure from the OdfBody element.

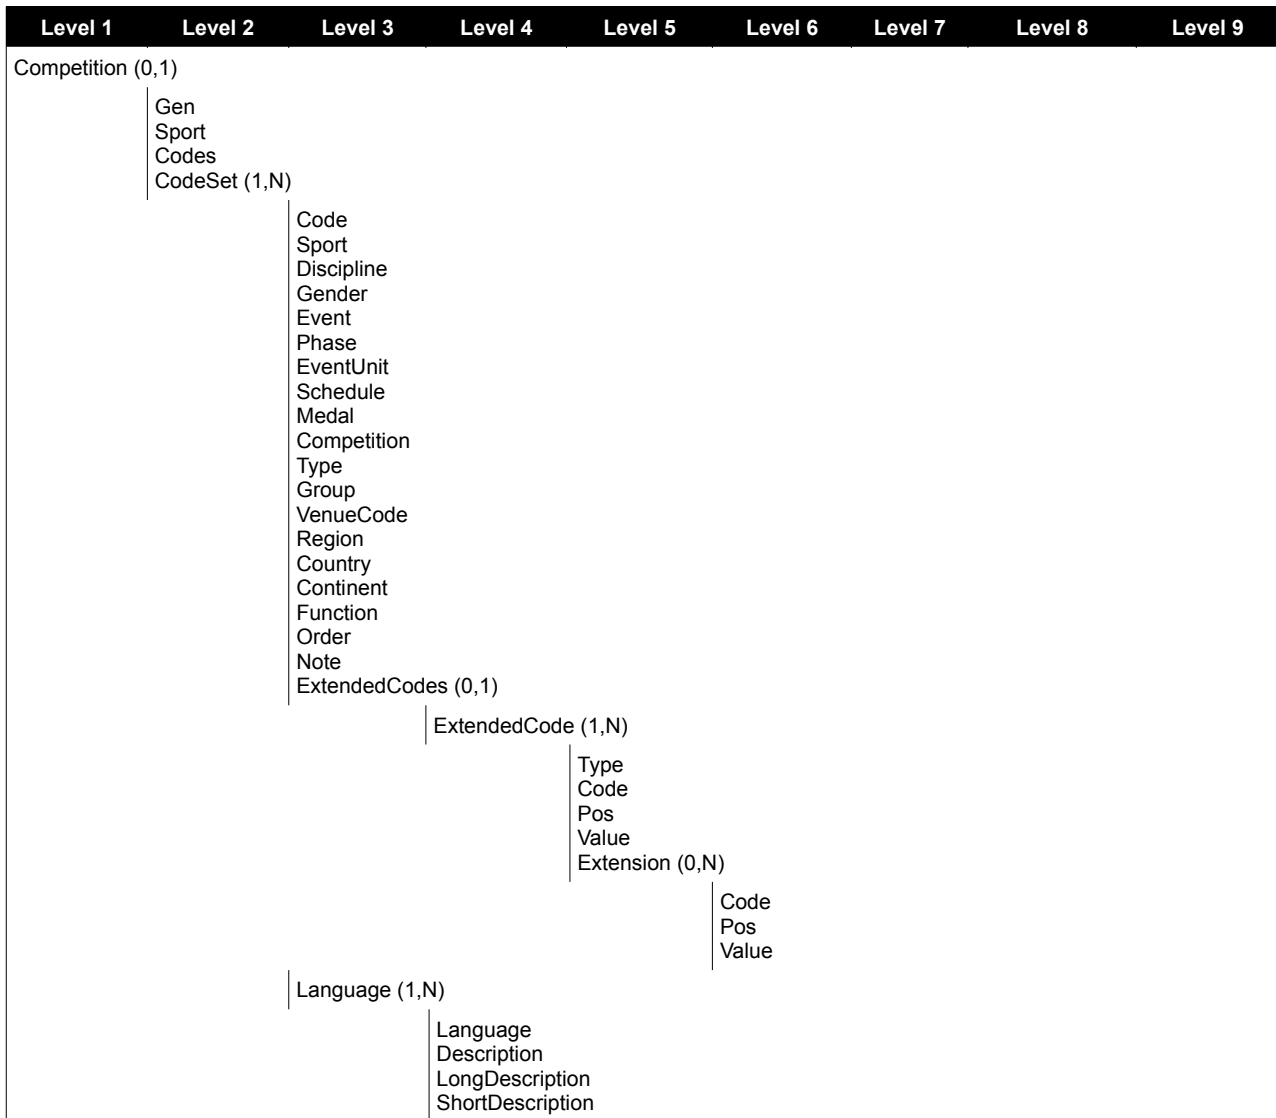

### 2.1.55.5 Message Values

Element: Competition (0,1)			
Attribute	M/O	Value	Description
Gen	O	S(20)	Version of the General Data Dictionary applicable to the message
Sport	O	S(20)	Version of the Sport Data Dictionary applicable to the message
Codes	O	S(20)	Version of the Codes applicable to the message



Element: CodeSet (1,N)			
Attribute	M/O	Value	Description
Code	M	S(40)	Code identifier (may or may not be unique)
Sport	O	S(2)	Sport Code where applicable
Discipline	O	S(3)	Discipline Code where applicable
Gender	O	S(1)	Gender Code where applicable
Event	O	S(18)	Event Code where applicable (including the event modifier)
Phase	O	S(4)	Phase Code where applicable
EventUnit	O	S(8)	Event Unit Code where applicable
Schedule	O	S(1)	Y if unit is scheduled else N
Medal	O	S(1)	Medal unit indicator
Competition	O	S(1)	Y if code is related to sports competition else N for non-competition
Type	O		Type of Code
Group	O		Group of Code
VenueCode	O	S(3)	Venue code, for Location table
Region	O	S(3)	Region related to the venue
Country	O	S(3)	Country Code for Organisation Table
Continent	O	S(3)	Continent Code for Organisation Table
Function	O	S(20)	Function Code where applicable
Order	O	S(10)	Sort or for codes if applicable
Note	O	S(250)	Note or comment related to the code, informational only

Element: CodeSet /ExtendedCodes (0,1) /ExtendedCode (1,N)			
Attribute	M/O	Value	Description
Type	M		See sport descriptions if extended
Code	M		
Pos	O		
Value	O		

Element: CodeSet /ExtendedCodes /ExtendedCode /Extension (0,N)			
Attribute	M/O	Value	Description
Code	M		See sport descriptions if extended
Pos	O		
Value	O		

Element: CodeSet /Language (1,N)			
Attribute	M/O	Value	Description
Language	M	S(3)	Language of the Description
Description	M	S(200)	Description of the Code
LongDescription	O	S(200)	Long Description of the Code
ShortDescription	O	S(200)	Short Description of the Code



### 2.1.55.6 Samples

#### Example of Country Codes

```
<Competition>
...
<CodeSet Code="ERI">
  <Language Language="ENG" Description="Eritrea" LongDescription="Eritrea" >
  <Language Language="FRA" Description="Érythrée" LongDescription="Érythrée" >
</CodeSet>
<CodeSet Code="FIN">
  <Language Language="ENG" Description="Finland" LongDescription="Finland" >
  <Language Language="FRA" Description="Finlande" LongDescription="Finlande" >
</CodeSet>
...
</Competition>
```

#### Example of Event Codes

```
<Competition>
...
<CodeSet Code="ATHMTJ-----" Discipline="ATH" Gender="M"
Event="TJ-----" Order="15">
  <Language Language="ENG" Description="Men's Triple Jump" >
  <Language Language="FRA" Description="Triple saut - hommes" >
</CodeSet>
<CodeSet Code="ATHMHJ-----" Discipline="ATH" Gender="M"
Event="HJ-----" Order="12">
  <Language Language="ENG" Description="Men's High Jump" >
  <Language Language="FRA" Description="Saut en hauteur - hommes" >
</CodeSet>
...
</Competition>
```

### 2.1.55.7 Code Sets Included

Code Set	Code	Lang.	Fields	Note
BACKGROUND_SPORT	ID	Multiple	Description LongDescription	
BACKGROUND_TYPE	ID	Multiple	Description LongDescription	
CLUSTER	ID	Multiple	Description LongDescription	
COMPETITION_CODE	ID	Multiple	Description	
CONTINENT	ID	Multiple	Description	
COUNTRY	ID	Multiple	Description LongDescription	
DISCIPLINE	Char(34) unique e.g. SWM----- ----	Multiple	Description Sport Discipline Schedule Order Group (IF)	If non-sport =Y then "non-sport"
DISCIPLINE_CLASS	Class+Discipline	Multiple	Description Discipline Type (Class)	
DISCIPLINE_FUNCTION	Function (Not unique)	Multiple	Description Discipline Function Type (Function Category) Order	
DISCIPLINE_GENDER	Char(34) unique e.g. BKBM----- ----	Multiple	Description Discipline Gender	





Code Set	Code	Lang.	Fields	Note
EVENT	Char(34) unique e.g. BKBMTEAM5----- -----	Multiple	Description LongDescription Discipline Gender Event Order Group (SEQ)	Team Event
EVENT_CLASS	Char(34) unique e.g. WBKMTEAM5----- -----	N/A	Discipline Gender Event Type (Class)	
EVENT_UNIT	Char(34) unique e.g. BKBMTEAM5----- GPA-0001----	Multiple	Description LongDescription ShortDescription (Unit Description) Discipline Gender Event Phase EventUnit Schedule Medal Type (EventUnitType) Group (Level) Order	
EVENT_UNIT_TYPE	ID	Multiple	Description	
FUNCTION_CATEGORY	ID	ENG	Description	
H1	ORIS_NO (May not be unique)	Multiple	Description Discipline	
HORSE_BREED	ID	Multiple	Description	
HORSE_COLOUR	ID	Multiple	Description	
HORSE_GENDER	ID	Multiple	Description	
LANGUAGE	ID	ENG	Description	
LOCATION	ID	Multiple	Description LongDescription ShortDescription Competition VenueCode Order Discipline	Source
MARITAL_STATUS	ID	Multiple	Description	
NOC	ID	Multiple	Description LongDescription ShortDescription Country Continent Order (OMDOrder) Medal (MedalCount)	Value of Participating
NPC	ID	Multiple	Description LongDescription ShortDescription Country Continent Order (OMDOrder) Medal (MedalCount)	Value of Participating
NEWS_SPORT	ID	Multiple	Description LongDescription	
NEWS_TYPE	ID	Multiple	Description LongDescription	



Code Set	Code	Lang.	Fields	Note
ORGANISATION	ID	Multiple	Description LongDescription Type	
ORGANISATION_TYPE	ID	ENG	Description	
PARTICIPANT_STATUS	ID	ENG	Description	
PERSON_GENDER	ID	Multiple	Description	
PHASE	Char(34) unique e.g. BKBMTEAM5----- GPA-----	Multiple	Description LongDescription ShortDescription (Phase Description) Discipline Gender Event Phase Type Order	
PHASE_TYPE	ID	Multiple	Description Type	
POSITION	ID (Not unique)	Multiple	Description Discipline Order	
RECORD	ID	Multiple	Description Order	Value of RelatedEvent
RECORD_TYPE	RecordType (Not unique)	Multiple	Description Discipline Group (RecordGroup) Order	
RESULTSTATUS	ID	Multiple	Description Order	
SCHEDULESTATUS	ID	Multiple	Description	
SESSION_TYPE	ID	Multiple	Description	
SPORT	ID	Multiple	Description	
SPORT_CODES	Code (Not unique)	Multiple	Description Discipline Group (Code_Entity) Order	Note
SPORT_GENDER	ID	ENG	Description	
VENUE	ID	Multiple	Description LongDescription Region (Cluster) Competition Type (IndoorOutdoor)	
WEATHER_COND	ID	Multiple	Description	
WEATHER_COND_SNOW	ID	Multiple	Description	Note
WEATHER_REGION	ID	Multiple	Description	
WIND_DIRECTION	ID	Multiple	Description	
VERSION	Version	ENG	Description (DateVersion)	

### 2.1.55.8 Message sort

The message does not have any defined sort order.

## 2.1.56 Venue Conditions

### 2.1.56.1 Description

The weather condition is a message containing the forecast and current conditions of the venue for today and several days.

### 2.1.56.2 Header Values

The following table describes the ODF header attributes.

Attribute	Value	Comment
CompetitionCode	<a href="#">CC @Competition</a>	Unique ID for competition
DocumentCode	GEN-----VVV-----	VVV is <a href="#">CC@VenueCode</a>
DocumentType	DT_VEN_COND	Venue weather conditions message
DocumentSubtype	<a href="#">CC @VenueCode</a>	Venue code
Version	1..V	Version number associated to the message's content. Ascendant number
FeedFlag	"P"-Production "T"-Test	Refer to the ODF header definition
Date	Date	Refer to the ODF header definition
Time	Time	Refer to the ODF header definition
LogicalDate	Date	Refer to the ODF header definition
Source	<a href="#">SC @Source</a>	Code indicating the system which generated the message.

### 2.1.56.3 Trigger and Frequency

This message should be sent on an hourly basis, from 6:00 to 21:00 at least, as close as possible to the top of the hour. Past/Current hours should be updated with real data, not forecast.

An additional message is required every day before 00:15. This should be considered the first message of the day.

The forecast information to be included in the message is:

#### For Summer Games

- The first forecast message of the day must be provided at 6:00 h. and must update all the information of the current day and the two days after. It must include the hours depicted in the table below plus hourly the weather provider must send day, night and global data for Current day, Current day + 1, Current day + 2, Current day + 3, Current day + 4 and Current day + 5.

First/Current day			6:00	9:00	12:00	15:00	18:00	21:00
Current day + 1	0:00	3:00	6:00	9:00	12:00	15:00	18:00	21:00
Current day + 2	0:00	3:00	6:00	9:00	12:00	15:00	18:00	21:00

- There will be a further forecast update message at 11:00 h. It must include information for the hours shown in the table below plus hourly the weather provider must send day, night and global data for Current day, Current day + 1, Current day + 2, Current day + 3, Current day + 4 and Current day + 5.

First/Current day					12:00	15:00	18:00	21:00
Current day + 1	0:00	3:00	6:00	9:00	12:00	15:00	18:00	21:00
Current day + 2	0:00	3:00	6:00	9:00	12:00	15:00	18:00	21:00



- There will be another forecast message at 17:00 h. It must include information for the hours shown in the table below plus hourly the weather provider must send day, night and global data for Current day, Current day + 1, Current day + 2, Current day + 3, Current day + 4 and Current day + 5.

First/Current day							18:00	21:00
Current day + 1	0:00	3:00	6:00	9:00	12:00	15:00	18:00	21:00
Current day + 2	0:00	3:00	6:00	9:00	12:00	15:00	18:00	21:00
Current day + 3	0:00	3:00	6:00					

- Finally, there will be a forecast update message at 23:00 h. It must include information for the next days (not for the current day), including the following hours plus hourly the weather provider must send day, night and global data for Current day + 1, Current day + 2, Current day + 3, Current day + 4 and Current day + 5.

First/Current day								
Current day + 1	0:00	3:00	6:00	9:00	12:00	15:00	18:00	21:00
Current day + 2	0:00	3:00	6:00	9:00	12:00	15:00	18:00	21:00
Current day + 3	0:00	3:00	6:00					


### For Winter Games

- The message should contain data for the current day and the two following days. It must always include all the hours specified in the table below plus hourly the weather provider must send day, night and global data for Current day, Current day + 1, Current day + 2, Current day + 3, Current day + 4 and Current day + 5.

First/Current day	6:00	7:00	8:00	9:00	10:00	11:00	12:00	13:00
	14:00	15:00	16:00	17:00	18:00	19:00	20:00	21:00
Current day + 1	0:00	3:00	6:00	9:00	12:00	15:00	18:00	21:00
Current day + 2	0:00	3:00	6:00	9:00	12:00	15:00	18:00	

### 2.1.56.4 Message Structure

The following elements describe the message structure from the OdfBody element.

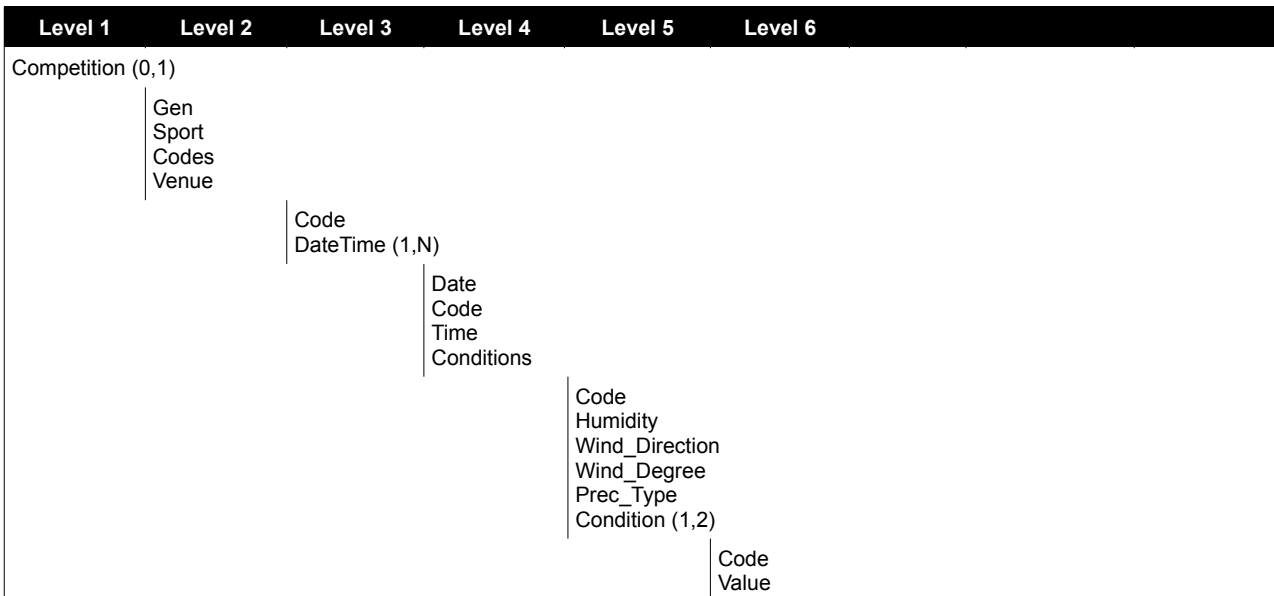



Level 1	Level 2	Level 3	Level 4	Level 5	Level 6
				Precipitation (0,N) (*)	Unit Value
				Pressure (0,N)	Unit Value
				Temperature (1,N)(***)	Code Unit Type Value
				Wind (1,N) (****)	Code Unit Value
			Description (0,N)	Period Language -	

(\*) N depends on the @Unit

(\*\*) N depends on the @Unit

(\*\*\*) N depends on the @Code+@Unit+@Type

(\*\*\*\*) N depends on the @Code+@Unit

### 2.1.56.5 Message Values

Element: Competition (0,1)			
Attribute	M/O	Value	Description
Gen	O	S(20)	Version of the General Data Dictionary applicable to the message
Sport	O	S(20)	Version of the Sport Data Dictionary applicable to the message
Codes	O	S(20)	Version of the Codes applicable to the message

Element: Venue			
Attribute	M/O	Value	Description
Code	M	<a href="#">CC @VenueCode</a>	Unique ID of the Venue

Element: Venue /DateTime (1..N)			
Attribute	M/O	Value	Description
Date	M	Date	
Code	M	TIME, DAY, NIGHT, GLOBAL	TIME is the hourly forecast DAY is the forecast for the morning data of the day NIGHT is the forecast for the night data of the day GLOBAL is the forecast for the data of the day
Time	O	Time	Time of the conditions Only required for @Code=TIME



Element: Venue /DateTime /Conditions			
Attribute	M/O	Value	Description
Code	M	GEN	Use "GEN" as a general Weather Point at the venue
Humidity	M	Numeric ##0	Humidity in %
Wind_Direction	M	<a href="#">CC @WindDirection</a>	Wind direction
Wind_Degree	M	Numeric ##0	Wind Degree (direction)
Prec_Type	O	<a href="#">SC @PrecType</a>	Precipitation type

Element: Venue /DateTime /Conditions/Condition (1,2)			
Attribute	M/O	Value	Description
Code	M	SKY or SNOW	Weather conditions type. Use SNOW only for Winter.
Value	M	<a href="#">CC @WeatherCondition</a>	Codes that describe the Weather Condition

Element: Venue /DateTime /Conditions/Precipitation (0,N)			
Attribute	M/O	Value	Description
Unit	M	<a href="#">SC @PrecipitationUnit</a>	System of measurement for precipitation
Value	M	###0.0	Precipitation quantity

Element: Venue /DateTime /Conditions/Pressure (0,N)			
Attribute	M/O	Value	Description
Unit	M	<a href="#">SC @PressureUnit</a>	Metric system unit for pressure
Value	M	###0	Air pressure

Element: Venue /DateTime /Conditions/Temperature (1,N)			
Attribute	M/O	Value	Description
Code	M	AIR, SNOW, WIND	Air, Snow or Wind Chill temperature Snow and Wind Chill temperature only Mandatory in Winter
Unit	M	<a href="#">SC @TemperatureUnit</a>	System of measurement for temperature
Type	O	MAX, MIN, NOR	Maximum, Minimum or Normal temperature Maximum and Minimum only required for @Code=AIR (and only for Time = DAY, NIGHT and GLOBAL) NOR is the average temperature for this Date and Time.
Value	M	+/- ##0.0	Temperature value of @Code

Element: Venue /DateTime /Conditions/Wind (1,N)			
Attribute	M/O	Value	Description
Code	M	SPEED, GUSTS	Wind Speed and Wind Gusts Gusts is only Mandatory in Winter
Unit	M	<a href="#">SC @WindUnit</a>	System of measurement for wind
Value	M	##0.00	Wind value of @Code

Element: Venue /DateTime /Description			
Attribute	M/O	Value	Description
Period	M	<a href="#">SC @WeatherPeriod</a>	Only use at Midday and at Tonight
Language	M	<a href="#">CC@Language</a>	Language
-	M	Free Text	Description of the weather in a Venue with no more than 4000 characters



INTERNATIONAL  
OLYMPIC  
COMMITTEE

SOG-2020-GEN-2.2 APP



INTERNATIONAL  
OLYMPIC  
COMMITTEE

**2.1.56.6 Sample**

SOG-2020-GEN-2.2 APP





```
.....
<Competition>
  <Venue Code="RAB">
    <DateTime Date="2012-07-18" Time="030000000" Code="TIME">
      <Conditions Code="C" Humidity="95" Wind_Degree="221" Wind_Direction="SW" Prec_Type="R">
        <Condition Code="SKY" Value="medcld"/>
        <Precipitation Value="0.0" Unit="M"/>
        <Pressure Value="1018" Unit="HPA"/>
        <Temperature Code="AIR" Value="16.3" Unit="C" Type="NOR"/>
        <Wind Code="SPEED" Value="4.48" Unit="MS"/>
      </Conditions>
    </DateTime>
    <DateTime Date="2012-07-18" Time="040000000" Code="TIME">
      <Conditions Code="C" Humidity="94" Wind_Degree="232" Wind_Direction="SW" Prec_Type="R">
        <Condition Code="SKY" Value="medcld"/>
        <Precipitation Value="0.0" Unit="M"/>
        <Pressure Value="1017" Unit="HPA"/>
        <Temperature Code="AIR" Value="15.6" Unit="C" Type="NOR"/>
        <Wind Code="SPEED" Value="4.94" Unit="MS"/>
      </Conditions>
    </DateTime>
    <DateTime Date="2012-07-18" Time="050000000" Code="TIME">
      <Conditions Code="C" Humidity="92" Wind_Degree="229" Wind_Direction="SW" Prec_Type="R">
        <Condition Code="SKY" Value="medcld"/>
        <Precipitation Value="0.0" Unit="M"/>
        <Pressure Value="1016" Unit="HPA"/>
        <Temperature Code="AIR" Value="15.2" Unit="C" Type="NOR"/>
        <Wind Code="SPEED" Value="4.70" Unit="MS"/>
      </Conditions>
    </DateTime>
    .....
    <DateTime Date="2012-07-18" Code="GLOBAL">
      <Conditions Code="C" Humidity="87" Wind_Degree="226" Wind_Direction="SW" Prec_Type="R">
        <Condition Code="SKY" Value="medcld"/>
        <Precipitation Value="1.9" Unit="M"/>
        <Pressure Value="1012" Unit="HPA"/>
        <Temperature Code="AIR" Value="14.0" Unit="C" Type="MIN"/>
        <Temperature Code="AIR" Value="18.7" Unit="C" Type="MAX"/>
        <Wind Code="SPEED" Value="5.57" Unit="MS"/>
      </Conditions>
      <Description Language="ENG" Period="MD">Generally cloudy perhaps with rain at
times.</Description>
      <Description Language="FRA" Period="MD">Nuageux avec rares averses peut-etre.</Description>
      <Description Language="ENG" Period="TN">No further detail.</Description>
      <Description Language="FRA" Period="TN">Aucun autre détail.</Description>
    </DateTime>
    <DateTime Date="2012-07-18" Code="DAY">
      <Conditions Code="C" Humidity="87" Wind_Degree="226" Wind_Direction="SW" Prec_Type="R">
        <Condition Code="SKY" Value="medcld"/>
        <Precipitation Value="1.9" Unit="M"/>
        <Pressure Value="1012" Unit="HPA"/>
        <Temperature Code="AIR" Value="18.7" Unit="C" Type="MAX"/>
        <Wind Code="SPEED" Value="5.57" Unit="MS"/>
      </Conditions>
      <Description Language="ENG" Period="MD">Generally cloudy perhaps with rain at
times.</Description>
      <Description Language="FRA" Period="MD">Nuageux avec rares averses peut-etre.</Description>
      <Description Language="ENG" Period="TN">No further detail.</Description>
      <Description Language="FRA" Period="TN">Aucun autre détail.</Description>
    </DateTime>
    <DateTime Date="2012-07-18" Code="NIGHT">
      <Conditions Code="C" Humidity="82" Wind_Degree="255" Wind_Direction="WSW" Prec_Type="R">
        <Condition Code="SKY" Value="prtclld"/>
        <Precipitation Value="0.0" Unit="M"/>
        <Pressure Value="1008" Unit="HPA"/>
        <Temperature Code="AIR" Value="14.0" Unit="C" Type="MIN"/>
        <Wind Code="SPEED" Value="5.20" Unit="MS"/>
      </Conditions>
      <Description Language="ENG" Period="MD">Generally cloudy perhaps with rain at
times.</Description>
      <Description Language="FRA" Period="MD">Nuageux avec rares averses peut-etre.</Description>
      <Description Language="ENG" Period="TN">No further detail.</Description>
      <Description Language="FRA" Period="TN">Aucun autre détail.</Description>
  </Venue Code="RAB">
</Competition>
```



```

</DateTime>
<DateTime Date="2012-07-19" Code="GLOBAL">
  <Conditions Code="C" Humidity="65" Wind_Degree="288" Wind_Direction="WNW" Prec_Type="R">
    <Condition Code="SKY" Value="lrshrd"/>
    <Precipitation Value="1.9" Unit="M"/>
    <Pressure Value="1010" Unit="HPA"/>
    <Temperature Code="AIR" Value="14.2" Unit="C" Type="MIN"/>
    <Temperature Code="AIR" Value="19.1" Unit="C" Type="MAX"/>
    <Wind Code="SPEED" Value="5.14" Unit="MS"/>
  </Conditions>
  <Description Language="ENG" Period="MD">Cloudy with spells of rain, perhaps heavy at
times.</Description>
  <Description Language="FRA" Period="MD">Nuageux avec pluie persistante, peut- être forte à
certains moments.</Description>
  <Description Language="ENG" Period="TN">No further detail.</Description>
  <Description Language="FRA" Period="TN">Aucun autre détail.</Description>
</DateTime>
.....
</Venue>
</Competition>
.....

```

### 2.1.56.7 Message sort

The message does not have any defined sort order.

## 2.1.57 Weather Alerts

### 2.1.57.1 Description

The weather alert is a message containing the current alerts for the Regions (Summer Games) or for the Venues (in Winter Games).

When there is a weather situation that makes it necessary to alert the audience, one message has to be provided. Region/Venue Alert messages are produced only in exceptional conditions.

### 2.1.57.2 Header Values

The following table describes the ODF header attributes.

Attribute	Value	Comment
CompetitionCode	<a href="#">CC @Competition</a>	Unique ID for competition
DocumentCode	GEN----- VVV----	VVV is CC@VenueCode (for Winter Games) or CC@WeatherRegion (for Summer Games)
DocumentType	DT_WEA_ALERT	Weather alert message
DocumentSubtype	<a href="#">CC @VenueCode</a> or <a href="#">CC@WeatherRegion</a>	Venue code (for Winter Games) or Region code (for Summer Games)
Version	1...V	Version number associated to the message's content. Ascendant number
FeedFlag	"P"-Production "T"-Test	Refer to the ODF header definition
Date	Date	Refer to the ODF header definition
Time	Time	Refer to the ODF header definition
LogicalDate	Date	Refer to the ODF header definition
Source	<a href="#">SC @Source</a>	Code indicating the system which generated the message.

### 2.1.57.3 Trigger and Frequency

Whenever there is a weather situation that makes it necessary to alert the audience.



### 2.1.57.4 Message Structure

The following elements describe the message structure from the OdfBody element.

Level 1	Level 2	Level 3	Level 4	Level 5
Competition (0,1)				
	Gen Sport Codes Place (0,1)			
		Code Alert (1,N)		
			Code ValidFrom (1,1)	
				Date Time
			ValidTo (1,1)	
				Date Time
			Description (1,N)	
				Language -

### 2.1.57.5 Message Values

Element: Competition (0,1)			
Attribute	M/O	Value	Description
Gen	O	S(20)	Version of the General Data Dictionary applicable to the message
Sport	O	S(20)	Version of the Sport Data Dictionary applicable to the message
Codes	O	S(20)	Version of the Codes applicable to the message

Element: Place (0,1)			
Attribute	M/O	Value	Description
Code	M	<a href="#">CC @VenueCode</a> or <a href="#">CC@WeatherRegion</a>	Unique ID of the Venue or Region

Element: Place /Alert (1,N)			
Attribute	M/O	Value	Description
Code	M	Numeric	Alert Sequential Number

Element: Place /Alert /ValidFrom (1,1)			
Attribute	M/O	Value	Description
Date	M	Date	Start date of validity
Time	M	Time	Start time of validity

Element: Place /Alert /ValidTo (1,1)			
Attribute	M/O	Value	Description
Date	M	Date	End date of validity
Time	M	Time	End time of validity



Element: Place /Alert /Description (1,N)			
Attribute	M/O	Value	Description
Language	M	<a href="#">CC@Language</a>	Language
-	M	Free Text	Description of the weather alert

### 2.1.57.6 Sample

```

<Competition>
  <Place Code="SFV">
    <Alert Code="1">
      <ValidFrom Date="2014-02-15" Time="08000000"/>
      <ValidTo Date="2014-02-15" Time="21000000"/>
      <Description Language="ENG">The temperature increase up to 6-13 degrees will be
expected.</Description>
      <Description Language="FRA">L'élévation de la température jusqu'à 6 à 13 degrés.</Description>
    </Alert>
  </Place>
</Competition>

```

### 2.1.57.7 Message sort

The message does not have any defined sort order.

## 3 PDF Feed

### 3.1 PDF Feed Messages

#### 3.1.1 PDF Message

##### 3.1.1.1 Description

The PDF message is a PDF file encapsulated in a XML message for one particular event unit. This PDF message is a generic message for all sports.

##### 3.1.1.2 Header Values

The following table describes the ODF header attributes.

Attribute	Value	Comment
CompetitionCode	CC @Competition	Unique ID for competition
DocumentCode	RSC	Depending on the PDF the RSC could be at any level.
DocumentSubcode	S(34)	This is an optional attribute Refer to the ODF header definition It can be useful for example to separate pdf statistics by competitor or Daily Schedules pdf by date (with format YYYY-MM-DD) or Official or Sport Communications pdf by Item Number PDFs which only apply to a single team should use the team code.
DocumentType	DT_PDF	PDF Message
DocumentSubtype	ORIS Type (or PRIS Type)	Refer to the ODF header definition It can be useful for example to say the type of the PDF, i.e. C51A, C73R,...  There are two special subtypes used GM (Good Morning) and GN (Good Night) which are used as the first and last PDF messages each day. These contain a PDF with the sport code and venue code and the words "Good Morning" and "Good Night" as appropriate. Document follows look of the Games. In this case the DocumentCode should be the venue RSC.
Version	1..V	Version number associated to the message's content. Ascendant number
ResultStatus	S(15)	Refer to the ODF header definition The status should reflect the status of the enclosed PDF (as in ORIS). Possible values are: START_LIST INTERMEDIATE PARTIAL UNOFFICIAL OFFICIAL The ResultStatus is only included where it adds value and should be used in the following ORIS reports: <b>C7x</b> - Status of the corresponding xml message (Results, Phase, Cumulative, Pools, Brackets, Ranking) <b>C8x</b> - INTERMEDIATE if during a unit/tournament, otherwise OFFICIAL when complete <b>C9x</b> - PARTIAL if not all medals are included for a unit, OFFICIAL if all medals are included It may also be included in other reports if appropriate (for example C69)
Language	S(3)	Refer to the ODF header definition
FeedFlag	"P"-Production "T"-Test	Refer to the ODF header definition
Date	Date	Refer to the ODF header definition
Time	Time	Refer to the ODF header definition
LogicalDate	Date	Refer to the ODF header definition
Source	<a href="#">SC @Source</a>	Code indicating the system which generated the message.

### 3.1.1.3 Trigger and Frequency


The general rule is that this message will be sent depending on the trigger and frequency defined in ORIS (or PRIS).

Trigger also after any major change.

### 3.1.1.4 Message Structure

The following elements describe the message structure from the OdfBody element.

The following elements describe the message structure from the OdfBody element.

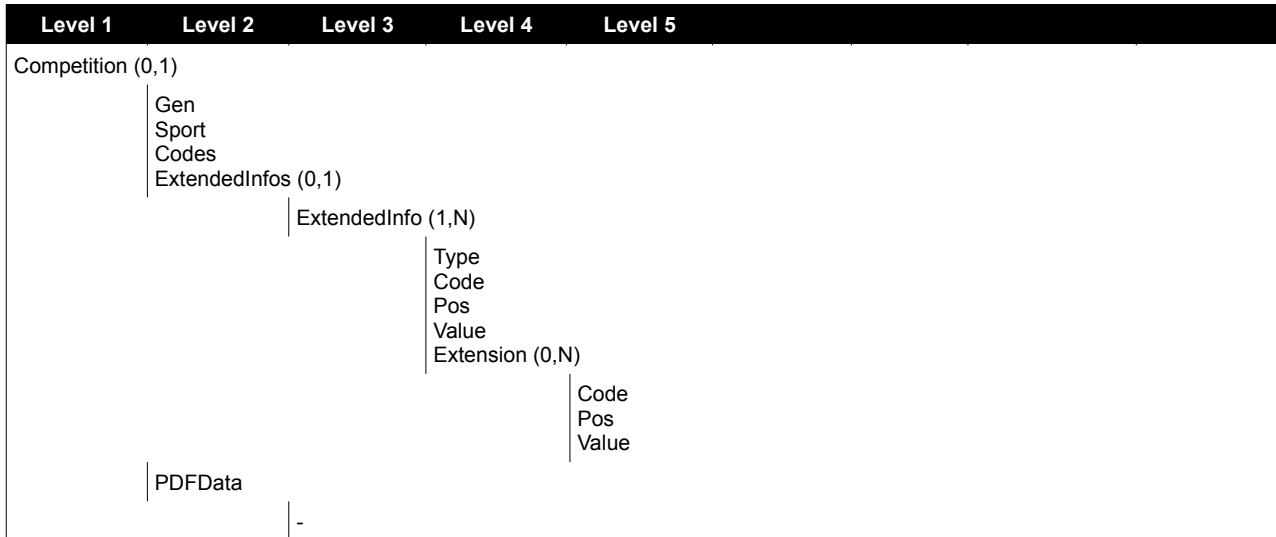

### 3.1.1.5 Message Values

Be aware of all mandatory attributes that must appear in any ODF PDF message.

Element: Competition (0,1)			
Attribute	M/O	Value	Description
Gen	O	S(20)	Version of the General Data Dictionary applicable to the message
Sport	O	S(20)	Version of the Sport Data Dictionary applicable to the message
Codes	O	S(20)	Version of the Codes applicable to the message

Element: ExtendedInfos /ExtendedInfo See sport specific definition for additional values			
Attribute	M/O	Value	Description
Type	M	Text (see below)	Type (categorization) of ExtendedInfo. See list below.
Code	M	See detail below.	Code as appropriate
Pos			
Value	M	See detail below	Applicable Value

Element: ExtendedInfos /ExtendedInfo /Extension			
Attribute	M/O	Value	Description
Code			See sport specific definition
Pos			
Value			



Element: Competition /PDFData			
Attribute	M/O	Value	Description
-	M	Free Text	The PDFData element may have a body consisting of one Base64-encoded report (a PDF file)

(Table comment: Attribute to be set Mandatory from Optional or redefined. Refer to the ODF Sport Data Dictionary for each of the disciplines)

### More detail of the ExtendedInfos

More detail of the ExtendedInfos				
Type	Code	Description	Expected	
EI	REPORT_TITLE	For @Type: Send proposed type	Always when available	
		For @Code: Send proposed code		
		For @Value: Send the title of the PDF or "GOOD MORNING" or "GOOD NIGHT" as appropriate. For the avoidance of doubt this is the H1 Title without status if concatenation is used.		
	REPORT_STATUS	For @Type: Send proposed type		When needed (when there is more information related to H1 report title, for example provisional etc.)
		For @Code: Send proposed code		
		For @Value: SC @ReportStatus		
VERSION	For @Type: Send proposed type	Always when available		
	For @Code: Send proposed code			
	For @Value: Send the version/revision data as used in the footer of the PDF message.			
OFFIC_COMM	SUBTYPE	For @Type: Send proposed type	If applicable and only when the PDF is official communication.	
		For @Code: Send proposed code		
		For @Value: DocumentSubtype from the applicable official communication		
	SUBTITLE	For @Type: Send proposed type		
		For @Code: Send proposed code		
		For @Value: Subtitle from the applicable official communication		
	ITEMNUM	For @Type: Send proposed type		
		For @Code: Send proposed code		
		For @Value: Numeric to uniquely identify the Official Communication Number. (ItemNum)		



### 3.1.1.6 Sample (Good Morning)

```

.....
<?xml version="1.0" encoding="utf-8"?>
<OdfBody CompetitionCode="OG2016" DocumentType="DT_PDF" Date="2016-06-27" Time="161907638"
LogicalDate="2016-06-27" Source="SCV" FeedFlag="T" DocumentCode="HOC-----HOC-----"
DocumentSubtype="GM" Version="1" >
  <Competition>
    <ExtendedInfos>
      <ExtendedInfo Type="EI" Code="REPORT_TITLE" Code="GOOD MORNING" />
    </ExtendedInfos>
    <PDFData>
      [encoded PDF]
    </PDFData>
  </Competition>
</OdfBody>

```

### 3.1.1.7 Sample (Normal Message)

```

.....
<?xml version="1.0" encoding="utf-8"?>
<OdfBody CompetitionCode="OG2016" DocumentCode="BKBMTTEAM5-----GPA-0001----"
DocumentType="DT_PDF" DocumentSubtype="C73" ResultStatus="OFFICIAL" Date="2012-06-27"
LogicalDate="2012-06-27" Time="161907638" Source="SCV" FeedFlag="T" Version="1" >
  <Competition>
    <ExtendedInfos>
      <ExtendedInfo Type="EI" Code="REPORT_TITLE" Value="RESULTS" />
      <ExtendedInfo Type="EI" Code="VERSION" Value="1.0" />
    </ExtendedInfos>
    <PDFData>
      [encoded PDF]
    </PDFData>
  </Competition>
</OdfBody>

```

### 3.1.1.8 Message sort

The message does not have any defined sort order.

## 4 Document Control

Version history		
Version	Date	Comments
2018-GEN-0.1	4 May 2015	First Version for PyeongChang 2018
2018-GEN-0.2	9 Jul 2015	New Federation Ranking included and other updates
2018-GEN-0.3	16 Jul 2015	Editorial corrections
2018-GEN-0.4	9 Sep 2015	Change Requests applied
2018-GEN-0.5	7 Oct 2015	Change Request Applied
2018-GEN-0.6	6 Nov 2015	Change Request Applied
2018-GEN-0.7	24 Mar 2016	Change requests and minor editing
2018-	19 May 2016	Minor corrections





GEN-0.8		
2018-GEN-0.9	24 Jun 2016	CRs, Minor corrections/typographical errors
2018-GEN-1.0	22 Sep 2016	Minor corrections
2018-GEN-1.1	10 Nov 2016	Typographical correction and minor improvement
2018-GEN-1.2	22 Dec 2016	Typographical corrections and CRs
2018-GEN-1.3	23 Feb 2017	Typographical corrections and change requests
2018-GEN-1.4	20 Apr 2017	Typographical corrections and change requests
2018-GEN-1.5	25 May 2017	Change Requests
2018-GEN-1.6	2 Oct 2017	Change Requests
2018-GEN-1.7	4 Dec 2017	Change Request
2020-GEN-1.0	1 Aug 2018	Change Requests
2020-GEN-1.1	5 Dec 2018	Change Requests and defect resolution
2020-GEN-1.2	18 Apr 2019	Change Requests and defect resolution
2020-GEN-1.3	30 May 2019	Change request and clarifications.
2020-GEN-1.4	14 Aug 2019	Change request and clarifications.
2020-GEN-1.5	11 Nov 2019	Change request and clarifications.
2020-GEN-1.6	10 Dec 2019	Updated with CRs
2020-GEN-1.7	6 Feb 2020	Updated with CR
2020-GEN-1.8	14 Feb 2020	Updated with typographical corrections
2020-GEN-2.0	15 May 2020	Updated with CRs
2020-GEN-2.1	22 Jul 2020	Updated with CRs
2020-GEN-2.2	4 Sep 2020	Restructure

**File Reference: SOG-2020-GEN-2.2 APP**

Change Log		
Version	Status	Changes on version
2018-GEN-0.1	SFR	First Version
2018-GEN-0.2	SFR	Updated with changes from Rio GL document Updated samples to use new code system (CR7454) Added ExtendedInfos extensions in DT_SCHEDULE for use when generated from the competition schedule application.
2018-	SFR	Clarified the term "Full RSC" to use it consistently.



GEN-0.3		Some minor typographical errors Added some winter sport samples Corrected field sizes in the codes message
2018- GEN-0.4	SFR	Applied Change Results CR7429 - Add date in DT_MEDALLISTS message CR7452 - Rename stats elements in DT_RESULT (and therefore DT_RESULT_ANALYSIS and DT_ESL) CR7455 - ExtendedResults in DT_CUMULATIVE_RESULT CR7456 - Add support for teams of Teams in DT_PARTIC_TEAMS CR7457 - Add ResultItems to DT_RESULT message (and therefore DT_RESULT_ANALYSIS and DT_ESL)
2018- GEN-0.5	SFR	LIVE Status added to DT_BRACKETS message Correct error in Discipline Medallists to be clear CR8126 - Add statistics in DT_CURRENT
2018- GEN-0.6	SFR	CR8254 - Add discipline in DT_PIC Includes changes made in Rio documentation
2018- GEN-0.7	SFA	For consistency, TeamName in the Competitor/Description is changed to always mandatory (though Description is not). Previously different depending on the message. Updated text in Order attribute related to sending 1 if only one exist. CR8928 - DT_RESULT/ANALYSIS/ESL add 'Attendance' as attribute at ExtendedInfos/VenueDescription DT_BRACKETS add Bib at Competitor and Competitor/Composition/Athlete DT_RANKING add 'Diff' as an attribute at Result and 'Bib' as an attribute at Competitor and at Competitor/Composition/Athlete DT_PARTIC and DT_PARTIC_TEAM add 'Substitute' and 'Status' at Discipline/RegisteredEvent CR8930 - Consistent use of DocumentSubtype and DocumentSubcode (add DocumentSubcode in Phase, Cumulative and pool messages.) CR8933 - Applied default sort order for DT_CUMULATIVE_RESULTS CR8934 - Add START_LIST and IRMs to brackets and remove LIVE ResultStatus CR8936 - Add H1 Headings to DT_CODES message. CR8938 - Normalising the ExtendedInfos for DT_PDF CR9036 - Change <Competition> element to cardinality (0,1) to allow for message invalidation. CR9360 - Play by Play message improvements (in play by play and current messages) CR9361 - Communication message improvements CR9941 - Add Result attribute at CompetitorPlace in DT_BRACKETS CR9942 - Add home/away indicator in Pool Standings
2018- GEN-0.8	SFA	Clarify that only the ENG description of the unit is expected in the schedule messages.
2018- GEN-0.9	SFA	Correct typographical errors in samples In DT_SCHEDULE updated to support SC @StartText CR10294 - DT_ALERT: Add two new DocumentSubtypes of NEWS and RESULTS (2.2.19.2) CR10246 - Add TVTeamName to Team participants message (DT_PARTIC_TEAMS). CR11930 - Remove DocumentSubcode from DT_SCHEDULE & DT_SCHEDULE_UPDATE
2018- GEN-1.0	APP	DT_RECORD: Clarify the order of the data in the message. Also clarify that <RecordData> can be sent for not established records where a standard applies.
2018- GEN-1.1	APP	- DT_FED_RANKING: Rankings /Ranking /ExtRanking /ExtRank should have cardinality of (0,N) - DT_BRACKETS: Provide more information on when the time should be included at Bracket /BracketItems /BracketItem.
2018- GEN-1.2	APP	- Correct typo. Add TVTeamName in DT_PARTIC_TEAMS which was accidentally removed. - Correct type. Add extension in DT_SCHEDULE for status and version which was accidentally removed. - DT_CURRENT: Update to include information on how to use the clock data. - DT_IMAGE: CR14627 - Add Result Element to include competitors in the message.
2018- GEN-1.3	APP	- DT_PARTIC: Clarify that all applicable participants are included regardless of status [CR14576] - DT_RESULT: Add Rank, RankEqual and SortOrder to StatisticItem (athlete and competitor) [CR14580] - DT_RESULT: Add DocumentSubcode in the Header [CR14628] - DT_RESULT: Remove StartListMod in the ODF Header [CR14579] - DT_RESULT: In ExtendedInfos change StartDate and EndDate to be actual only, do not include until unit starts/ends [CR14578] - DT_PLAY_BY_PLAY/DT_CURRENT: Modify the TimeStamp to be in DateTime format. [CR14577] - DT_GPS_DATA: Message Removed [CR14586] - DT_POOL_STANDING: Update the description Result/Ratio to "Ratio value, see sports documents for more information" thus making it more generic and flexible. - DT_PIC: Added 'HEADSHOT' as possible DocumentSubtype. [CR14630] - Correct samples of team code where incorrect(typo) [ATHM4X400M--ESP01]. - Other minor typographical errors without changing the meaning
2018- GEN-1.4	APP	- DT_RESULT: Add duration in ExtendedInfos [CR14578] - DT_SCHEDULE: Add attributes PreviousWLT and PreviousUnit at element Unit/StartList/Start



2018- GEN-1.5	APP	<ul style="list-style-type: none"> <li>- DT_SCHEDULE: Description of use for the Order@Unit attribute updated to be more clear when special ordering is required</li> <li>- DT_CONFIG: Triggering updated to clarify that new version of DT_RESULT as soon as DT_CONFIG changes.</li> <li>- DT_IMAGE: Type@Result/Competitor changed to Optional</li> <li>- DT_CURRENT: DocumentSubtype added to support distinction when DT_CURRENT is used for more than one purpose.</li> <li>- DT_RESULT: Triggering: ResultStatus description updated to provide more detail.</li> <li>- DT_BIO_PAR/DT_BIO_PAR_IMP: Add flag as an extension to indicate that the athlete participated in the Youth Olympic Games.</li> </ul>
2018- GEN-1.6	APP	<ul style="list-style-type: none"> <li>- CR08929 Add Add new message for Medal Presenters (DT_PRESENTER)</li> <li>- CR15039 Add DT_PARTIC_NAME message (for use after PyeongChang)</li> <li>- CR15219 Add passport names to DT_PARTIC message (for use after PyeongChang)</li> <li>- CR15263 Add support uniform images in DT_IMAGE (for use after PyeongChang)</li> </ul>
2018- GEN-1.7	APP	<ul style="list-style-type: none"> <li>- CR15803: Update DT_SCHEDULE for non-competition items</li> <li>- DT_SCHEDULE: Minor editorial.</li> </ul>
2020- GEN-1.0	APP	<ul style="list-style-type: none"> <li>- CR16078: Add scoreboard names in DT_PARTIC_NAME message.</li> <li>- CR16537: Add Progress element in ExtendedInfos in DT_PHASE_RESULT, DT_CUMULATIVE_RESULT, DT_BRACKET, DT_RANKING, DT_STATS, DT_POOL_STANDING.</li> <li>- CR16538: Align event order to the IF Event presentation order in DT_MEDALLISTS_DISCIPLINE (see sort order)</li> <li>- CR16540: Add DT_MEDALS to be sent at discipline level as well as the existing overall level.</li> <li>- CR16541: Change Document/Title to free text in DT_NEWS and DT_BCK messages.</li> <li>- CR16626: Increase triggering in DT_MEDALLIST to include UNOFFICIAL.</li> <li>- CR16627: Increase size of DocumentSubtype in DT_PDF to allow use of team codes rather than NOC codes for statistics.</li> <li>- CR16628: In DT_BRACKETS add attributes to remove need for extensions and simplify processing. Clarify previous unit.</li> <li>- CR16671: Add TV family name into the DT_PARTIC and DT_PARTIC_NAME messages.</li> <li>- DT_CODES: Correct typo in RECORD message</li> </ul>
2020- GEN-1.1	APP	<ul style="list-style-type: none"> <li>- CR16616: Change unit medal type in DT_SCHEDULE/DT_SCHEDULE_UPDATE</li> <li>- CR16692: Add support for teams of teams in some messages.</li> <li>- CR16716: Changes in DT_ALERT to add SERVICE message, change DocumentCode and update triggering.</li> <li>- CR16833: Update DT_SCHEDULE to clarify and allow UNSCHEDULED units in message.</li> <li>- CR16910: Updates in DT_BIO_PAR for data related to birth and residence.</li> <li>- CR16914: Updates in DT_WEATHER to use venue level and adding extensions</li> <li>- CR16920: Updates in DT_CODES to add tables and fields to the message.</li> <li>- CR16928: Add more attributes in results to remove some common extensions.</li> <li>- CR17019: Increase the field size in some elements in athlete and NOC biographies.</li> <li>- DT_PDF: Update ExtendedInfos EI/REPORTTITLE to be clear.</li> <li>- DT_PDF: Fixed defect to add Source to the header, was missing in error.</li> <li>- Defect correction in the identifier for news, background, transport and alerts. Change from numeric to string. Applies in DocumentSubcode and Parent within the message.</li> </ul>
2020- GEN-1.2	APP	<ul style="list-style-type: none"> <li>CR16542: Add DT_FLAGBEARERS message</li> <li>CR17269: Change athlete biographies to add field 'Milestones'</li> <li>CR17284: Add UnitNum in DT_PLAY_BY_PLAY</li> <li>CR17391: Clarify DT_MEDALS (data provided) and DT_MEDALLIST_DISCIPLINE (sort order)</li> <li>CR17421: Update DT_PRESENTER definition to manage initial list</li> <li>DT_SCHEDULE_UPDATE: Reword triggering to improve clarity</li> <li>DT_BCK: Correct typographical error in sample in sample</li> </ul>
2020- GEN-1.3	APP	<ul style="list-style-type: none"> <li>CR16640: Add ODF Version in Competition Element</li> <li>CR17409: Add Short Description in DT_CODES for NOC table</li> <li>CR17521: Add more detail in Team of Teams in applicable messages</li> <li>Editorial improvements and typographical corrections without changing the intent.</li> </ul>
2020- GEN-1.4	APP	<ul style="list-style-type: none"> <li>CR17739: Change Name and TVTeamName to mandatory in DT_PARTIC_TEAMS</li> <li>CR17808: Add Competititon/Officials and Competititon/Stats/Competitor/Coaches in DT_STATS</li> <li>CR17809: Change Participant/OlympicSolidarity to disallow N</li> <li>CR17826: Add Competition/Session/Medal in DT_SCHEDULE/_UPDATE</li> <li>CR17827: Add Competititon/StatsItems and Competititon/Result/Competitor/Coaches/Coach/ExtCoach in DT_RESULT (and associated DT_RESULT_ANALYSIS, DT_ESL)</li> <li>CR18056: Update ResultsItems in DT_RESULT, DT_CUMULATIVE_RESULT, DT_ESL &amp; DT_CUMULATIVE_RESULT to include the same attributes as in Result &amp; ExtendedResult</li> <li>DT_CODES: Add definition for EVENT_CLASS and DISCIPLINE_CLASS</li> </ul>
2020- GEN-1.5	APP	<ul style="list-style-type: none"> <li>CR18316: Add option for .png in DT_PIC/HEADSHOT</li> <li>CR18355: Add ResultStatus START_LIST in DT_POOL_STANDING</li> <li>CR18395: Increase size of SessionCode in DT_SCHEDULE/_UPDATE</li> </ul>



		CR18396: Add REPORT_STATUS in ExtendedInfos in DT_PDF DT_SCHEDULE: Clarify SessionCode in the case of interrupted units. Correct typographical errors in samples
2020- GEN-1.6	APP	CR018560: DT_MEDALLISTS: Add clarification in triggering CR018565: DT_PARTIC: Remove dash from weight as an option CR018622: DT_MEDALS Add clarification and remove 0s Clarification in DT_PDF header without changing the intent.
2020- GEN-1.7	APP	Correct minor typographical errors. DT_PRESENTER: Update the length of Role (to 45) and PresenterName (to 32) [CR18702] DT_MEDALLIST_DISCIPLINE: Correct the error in cardinality of ExtendedInfos /ExtendedInfo. [188151]
2020- GEN-1.8	APP	DT_VEN_COND: Correct typographical error in message structure for Precipitaion and Pressure attributes (attributes were correct in Message Values and schema). DT_BCK: Correct the error in DocumentCode. Send RSC at Discipline Level.
2020- GEN-2.0	APP	DT_SCHEDULE: Add BYE at Competition /Unit /StartList /Start /Competitor for flexibility [CR019493] DT_PARTIC_TEAMS: Add Team/TeamType and Team/ShortName [CR019497] DT_RESULT: Add BYE at Result/Competitor for flexibility [CR019493] DT_CUMULATIVE_RESULT: Add ResultStatus START_LIST [CR019493] DT_MEDALLISTS_DISCIPLINE: Add extensions for consistency with DT_MEDALLIST [CR019495] DT_FLAG_BEARER: Update message to support multiple flagbearers [CR019572] DT_BIO_NOC: Add flexibility for multiple flagbearers [CR019246] DT_CODES: Add missing tables to message [CR019492] DT_ALERT: Add Document/Code to allow for translations in standard alerts [CR019494] DT_WEA_ALERT: Add the cardinality which was missing in the elements under Place/Alert (typographical error) DT_PDF: Add flexibility in ResultStatus [CR019493]
2020- GEN-2.1	APP	DT_VEN_COND: Clarify format at Venue /DateTime /Conditions /Humidity (##0) DT_VEN_COND: Clarify format at Venue /DateTime /Conditions /Wind_Degree (##0) DT_CODES: Update LOCATION code set table to include ShortDescription [CR19968] (applicable from Beijing 2022) DT_PING: Add message [CR19969]
2020- GEN-2.2	APP	Document restructured to add responsibilities table and merge venue and central messages DT_SCHEDULE: Update message description to include Y and S units in applying CR020215 DT_PDF: Update ResultStatus (adding START_LIST) in the header to match OVR implementation