

Olympic Data Feed



Figure Skating ODF Data Dictionary

Technology and Information Department © International Olympic Committee

WOG-2022-FSK-1.6 APP 9 Aug 2021



License

The document accompanying this license and the information contained therein (the Document), whether in a paper or electronic format, is made available to you subject to the terms stated below. By using and/or copying all or part of the Document, you (the licensee) agree that you will comply with the following terms and conditions.

- 1. You may, on a non-exclusive basis, use the Document only on the condition that you abide by the terms of this license. Subject to this condition and other terms and restrictions contained herein, the Document and the information contained therein may be used (i) to further develop the standards described in the Document for use in relation with the Olympic and Paralympic Games and/or (ii) to develop similar standards for other events than the Olympic and Paralympic Games (both (i) and (ii) are hereinafter designated as the Permitted Use, and works further developing these standards for the Olympic and Paralympic Games or developing similar standards for other events are hereinafter referred to as Derivative Works), and copies of the Document or of Derivative Works may be made and distributed for the purpose of the Permitted Use, PROVIDED THAT the COPYRIGHT and references to the IOC appearing in the Document and the TERMS OF THIS LICENSE are included on ALL such COPIES, and further PROVIDED THAT you do not charge any fee or any other monetary compensation for the distribution of the Document to others. The copyright and other intellectual property rights in the Document remain vested in the IOC and the IOC remains entitled to assert his copyright or other intellectual property rights in the Document against any person or entity who does not comply with the terms of this License.
- 2. A copy of any Derivative Work shall be provided to the IOC free of charge. Moreover, the IOC is granted a worldwide, perpetual, unrestricted, royalty-free non-exclusive license to use any Derivative Work for the further development of the standards made by or for the IOC in relation to the Olympic and Paralympic Games (these standards and the documents describing them are hereinafter referred to as Further Standards) and to make or have made all kinds of exploitation of the Further Standards, with the right to grant sub-licenses.
- 3. Except if reproduced in the Document, the use of the name and trademarks of the IOC is strictly prohibited, including, without limitation, for advertising, publicity, or in relation to products or services and their names. Any use of the name or trademarks of the IOC, whether registered or not, shall require the specific written prior permission of the IOC.
- 4. NO WARRANTY, EXPRESSED OR IMPLIED, IS MADE REGARDING THE ACCURACY, ADEQUACY, COMPLETENESS, RELIABILITY OR USEFULNESS OF ANY INFORMATION CONTAINED IN THE DOCUMENT. The Document and the information contained herein are provided on an "as is" basis. THE IOC DISCLAIMS ALL WARRANTIES OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY WARRANTY OF NON-INFRINGEMENT OF PROPRIETARY RIGHTS, MERCHANTABILITY, OR FITNESS FOR A PARTICULAR PURPOSE. IN NO EVENT SHALL THE IOC BE LIABLE TO ANYONE FOR DAMAGES OF ANY KIND ARISING FROM OR RELATING TO YOUR ACQUISITION, USE, DUPLICATION, DISTRIBUTION, OR EXPLOITATION OF THE DOCUMENT OR ANY PORTION THEREOF, INCLUDING BUT NOT LIMITED TO, COMPENSATORY DAMAGES, LOST PROFITS, LOST DATA OR ANY FORM OF SPECIAL, INCIDENTAL, DIRECT, INDIRECT, CONSEQUENTIAL OR PUNITIVE DAMAGES, WHETHER BASED ON BREACH OF CONTRACT OR WARRANTY, TORT OR OTHERWISE. THE IOC FURTHER DISCLAIMS ANY LIABILITY FOR ANY DAMAGE CAUSED WHEN THE DOCUMENT IS USED IN A DERIVATIVE WORK. The IOC further disclaims any liability regarding the existence or inexistence of any intellectual property or other rights that might be claimed by third parties with respect to the implementation or use of the technology or information described in the Document.

The same conditions as those described in this Section shall apply mutatis mutandis to the license granted to the IOC on the Derivative Works in Section 2 above.

- 5. This License is perpetual subject to your conformance to its terms and conditions. The IOC may terminate this License immediately upon your breach of any of its terms and, upon such termination you will cease all use, duplication, distribution, and/or exploitation in any manner of the Document.
- 6. This License is governed by the laws of Switzerland. You agree that any disputes arising from or relating to this License will be resolved in the courts of Lausanne, Switzerland.

IF YOU DO NOT AGREE TO THESE TERMS YOU MUST CEASE ALL USE OF THE DOCUMENT NOW.



Table of Contents

1 Introduction	
1.1 This document	<u>5</u>
1.2 Objective	<u>5</u>
1.3 Main Audience	<u>5</u>
1.4 Glossary	5
1.5 Related Documents	
2 Messages	
2.1 Figure Skating Overview	
2.2 Applicable Messages	
2.3 Messages	
2.3.1 Competition schedule / Competition schedule update	
2.3.1.1 Description	
2.3.1.2 Header Values	
2.3.1.3 Trigger and Frequency	
2.3.1.4 Message Structure	
2.3.1.5 Message Values	
2.3.1.6 Message Sort	
2.3.2 List of participants by discipline / List of participants by discipline update	
2.3.2.1 Description	
2.3.2.2 Header Values	
2.3.2.3 Trigger and Frequency	
2.3.2.4 Message Structure	
2.3.2.5 Message Values	
2.3.2.6 Message Sort	
2.3.3 List of teams / List of teams update	
2.3.3.1 Description	
2.3.3.2 Header Values	
2.3.3.3 Trigger and Frequency	
2.3.3.4 Message Structure	
2.3.3.5 Message Values	
2.3.3.6 Message Sort	
2.3.4 Event Unit Start List and Results	29
2.3.4.1 Description	
2.3.4.2 Header Values	
2.3.4.3 Trigger and Frequency	
2.3.4.4 Message Structure	
2.3.4.5 Message Values	
2.3.4.6 Message Sort	
2.3.5 Current Information	
2.3.5.1 Description	
2.3.5.2 Header Values.	
2.3.5.3 Trigger and Frequency	
2.3.5.4 Message Structure	
2.3.5.5 Message Values	
2.3.5.6 Message Values	
2.3.6 Cumulative Results	
∠.∪.∪ ∪amalative regalis	<u></u>



2.3.6.1 Description	<u>53</u>
2.3.6.2 Header Values	<u>53</u>
2.3.6.3 Trigger and Frequency	<u>53</u>
2.3.6.4 Message Structure	
2.3.6.5 Message Values	
2.3.6.6 Message Sort	
2.3.7 Event Final Ranking	
2.3.7.1 Description	
2.3.7.2 Header Values	<u>63</u>
2.3.7.3 Trigger and Frequency	
2.3.7.4 Message Structure	
2.3.7.5 Message Values	
2.3.7.6 Message Sort	
2.3.8 Event's Medallists	
2.3.8.1 Description	<u>69</u>
2.3.8.2 Header Values	<u>69</u>
2.3.8.3 Trigger and Frequency	<u>69</u>
2.3.8.4 Message Structure	
2.3.8.5 Message Values	<u>71</u>
2.3.8.6 Message Sort	<u>74</u>
2.3.9 Medallists by discipline	<u>75</u>
2.3.9.1 Description	<u>75</u>
2.3.9.2 Header Values	
2.3.9.3 Trigger and Frequency	
2.3.9.4 Message Structure	<u>75</u>
2.3.9.5 Message Values	<u>77</u>
2.3.9.6 Message Sort	<u>80</u>
2.3.10 Configuration	<u>81</u>
2.3.10.1 Description	
2.3.10.2 Header Values	
2.3.10.3 Trigger and Frequency	
2.3.10.4 Message Structure	
2.3.10.5 Message Values	
2.3.10.6 Message Sort	
3 Message Timeline	
3.1 Preparation Phase	
3.2 Before competition	
3.3 During competition	
3.4 After competition	
4 Document Control	<u>90</u>



1 Introduction

1.1 This document

This document includes the ODF Figure Skating Data Dictionary. This Data Dictionary refines the messages described in the ODF General Messages Interface Document specifically for this discipline.

1.2 Objective

The objective of this document is to provide a complete and formal definition of the ODF Figure Skating Data Dictionary, with the intention that the information message producer and the message consumer can successfully interchange the information as the competition is run.

1.3 Main Audience

The main audience of this document is the IOC as the ODF promoter, ODF users such as the World News Press Agencies, Rights Holding Broadcasters and International Sports Federations.

1.4 Glossary

The following abbreviations are used in this document.

Acronym	Description		
IF	ernational Federation		
IOC	national Olympic Committee		
NOC	ational Olympic Committee		
ODF	Nympic Data Feed		
RSC	Results System Codes		
WNPA	World News Press Agencies		

1.5 Related Documents

Document Title	Document Description
ODF Foundation Principles	The document explains the environment & general principles for ODF
ODF General Messages Interface	The document describes the ODF General Messages
Common Codes	The document describes the ODF Common codes
ODF Header Values	The document details the header values which shows which RSCs are used in which messages.
ORIS Sports Document	The document details the sport specific requirements



2 Messages

2.1 Figure Skating Overview

MESSAGES IN EACH EVENT

Individual / Couples Events

* There will be a DT_RESULT and DT_CURRENT for each segment in each event. The finals event results are contained in a DT_CUMULATIVE_RESULT message. DT_CURRENT is sent during the competition.

Team Event

* There are two phases, qualification and final. In the qualification there are four DT_RESULT messages, one for each of 3 short programs and rhythm dance. In the final there is again four DT_RESULT messages, one for each free program. As in singles / couples there will also be DT_CURRENT.

A DT_CUMULATIVE_RESULT message will provide the overall standings in the team event.

SCHEDULE

* The DT_SCHEDULE/DT_SCHEDULE_UPDATE message will include each segment separately using the same RSC of the DT_RESULT message fore the segment (Y).

2.2 Applicable Messages

The following table is a full list of all ODF messages and describes the list of messages used in this discipline.

- The column "Message type" indicates the DocumentType that identifies a message
- The column "Message name" is the message name identified by the message type
- The column "Message extended" indicates whether a particular message has extended definition in regards to those that are general for all sports. If one particular message is not extended, then it follows the general definition rules.
- Message responsibilities appears in the ODF General Document.

Message Type	Message Name	Message\ nextended
DT_SCHEDULE / DT_SCHEDULE_UPDATE	Competition schedule / Competition schedule update	X
DT_PARTIC / DT_PARTIC_UPDATE	List of participants by discipline / List of participants by discipline update	X
DT_PARTIC_NAME	Participant Names	
DT_PARTIC_TEAMS / DT_PARTIC_TEAMS_UPDATE	List of teams / List of teams update	X
DT_RESULT	Event Unit Start List and Results	X
DT_CURRENT	Current Information	X
DT_CUMULATIVE_RESULT	Cumulative Results	X
DT_RANKING	Event Final Ranking	X
DT_MEDALLISTS	Event's Medallists	X
DT_MEDALLISTS_DISCIPLINE	Medallists by discipline	X



DT_MEDALS	Medal standings	
DT_CONFIG	Configuration	X
DT_COMMUNICATION	Communication	
DT_PRESENTER	Medal Presenters	
DT_LOCAL_ON	Discipline/venue start transmission	
DT_LOCAL_OFF	Discipline/venue stop transmission	
DT_KA	Keep Alive	
DT_ALERT	Alert	
DT_BCK	Background Document	
DT_BIO_PAR	Participant Biography	
DT_BIO_TEA	Team Biography	
DT_NEWS	News Document	
DT_ESL	Extended Start List	
DT_PIC	Pictures	
DT_PDF	PDF Message	

9 Aug 2021



2.3 Messages

2.3.1 Competition schedule / Competition schedule update

2.3.1.1 Description

The Competition schedule is a bulk message provided for one discipline. As a general rule, it contains the complete schedule information for all event units needed to run a competition and excludes event units for activities such as unofficial training and press conferences.

This message contains the competition timetable for a complete discipline as well as status for each competition unit and is updated from OVR via the schedule update message.

All event units in codes which have the 'schedule' flag set to 'Y' and 'S' are included in schedule messages regardless of status (those without status must be sent as UNSCHEDULED if the schedule flag is 'Y' or 'S').

The arrival of the competition schedule message resets all the previous schedule information for one discipline.

The StartList component of the message is only included in the case that the Unit Type is one of HATH, HCOUP, HNOC or HTEAM and at least one of the competitors are known.

The Composition component (i.e. listing athletes) is only included in the case that the Unit Type is one of HATH or HCOUP.

For reference the applicable unit types (from common codes) are:

HATH Individual Head to Head units (e.g. ARC, BDM, TEN, SBD etc)
HCOUP Pairs/Couples Head to Head units (e.g. BDM, TEN etc)
HTEAM Teams Head to Head units (e.g. BKB, VBV, HBL, CUR, IHO etc)

Managing when start times are not known.

In some disciplines the start time of each unit is not known and the unit are managed by order rather than time.

In these disciplines only the time of the first unit (or first unit per location) is known and distributed. In this case all units should be sent with the same start time and those following units flagged as HideStartDate (and finish). To be able to correctly order these units then the Order attribute is used (and must be sent from the venue).

To ensure there are no incorrectly ordered units then the start time must not be updated to the actual start time (there is an actual start time field to cater for this). For example:

Start Time Display Unit HideStartDate Location Order in message
12:00 12:00 Unit 1 N Court 2 1
12:00 Match 2 Court 2 Unit 2 Y Court 2 2

Olympic Data Feed - © IOC

Competition schedule / Competition schedule update

Technology and Information Department



12:00 Match 3 Court 2 Unit 3 Y Court 2 3 16:30 Not before 16:30 Unit 4 Y Court 2 4

If the discipline requires some text describing the order then StartText is used. Typical uses include "Not before 17:00" or "SUN 29 - 2nd match on CC" or "Follows".

Advice for end users - how to sort event units and use DT_SCHEDULE:

- When displaying the schedule users must use the following sort order to display as intended:
- 1. By day (or filter by day)
- 2. By location if applicable (in a small number of sports, when EventOrder = LOC in Discipline codes)
- 3. By Time (regardless if HideStartDate="Y")
- 4. By Order
- The Order is sent for all units where HideStartDate="Y" or if special ordering is required else not sent. Start with 1 each new session each day
- End users should display StartText if HideStartDate="Y"

If a StartText value of "Not before hh:mm" is used then it is expected that the StartDate sent is the same hh:mm.

Competition schedule update:

Competition schedule update is an update message. It is not a complete schedule information message, but only the schedule data being modified.

The arrival of this message updates the previous schedule information for one particular event unit(s) or sessions(s), but does not notify any other change for the rest of the event units/sessions except for those contained in the message.

The key of the information updated is Unit @Code. Therefore, any new unit, deleted unit or updated unit will be identified by all this attribute.

It has to be understood that if one DT_SCHEDULE message arrives, then all previous DT_SCHEDULE_UPDATE messages should be discarded.

When message is sent from Competition Schedule application in advance of the Games the element ExtendedInfos/EntendedInfo will contain following information:

- Type=CS, Code=VERSION, the attribute Value will indicate the version details from the competition schedule application
- Type=CS, Code=STATUS the attribute Value will indicate the status details from the competition schedule application

2.3.1.2 Header Values

The following table describes the message header attributes.

Attribute	Value	Comment
CompetitionCode	CC @Competition	Unique ID for competition
DocumentCode	CC @Discipline	Full RSC at the discipline level
DocumentType	DT_SCHEDULE / DT_SCHEDULE_UPDATE	Competition schedule bulk / update
Version	1V	Version number associated to the message's content. Ascending

Olympic Data Feed - © IOC

Competition schedule / Competition schedule update



		number
FeedFlag	"P"-Production "T"-Test	Test message or production message.
Date	Date	Date when the message is generated, expressed in the local time zone where the message was produced.
Time	Time	Time up to milliseconds when the message is generated, expressed in the local time zone where the message was produced.
LogicalDate	Date	Logical Date of events. This is the same as the physical day except when the unit or message transmission extends after midnight. See full explanation in ODF Foundation.
Source	SC @Source	Code indicating the system which generated the message.

2.3.1.3 Trigger and Frequency

The competition schedule will be sent as a bulk message (DocumentType="DT_SCHEDULE") when available before the Games and then sent multiple times until a date to be confirmed after which only update messages will be sent (DocumentType="DT_SCHEDULE_UPDATE") by OVR. There is no automatic triggering and this (DT_SCHEDULE) message must not be sent after the transfer of control to OVR.

The competition schedule update message should be triggered at any time there has been a competition schedule modification for any previously sent competition schedule bulk message or update message including the addition of start list details (H2H).

Generally start list details for H2H units should be sent immediately when officially known which should be as soon as possible after the preceding unit changes to official.

The triggers for status changes are described in each sport data dictionary where differences are needed.

If any text descriptions change in a message (as opposed to the code) then this message is not resent to correct previous messages however the new data is to be used in future messages.

2.3.1.4 Message Structure

The following table defines the structure of the message.

Level 1	Level 2	Level 3	Level 4
Competition (0,1)			
	Gen		
	Sport		
	Codes		
	Session (0,N)		
	·	SessionCode	
		StartDate	
		EndDate	
		Leadin	
		Venue	
		VenueName	



ModificationIndicator SessionStatus SessionType Medal SessionName (1.N) Language Value Unit (0.N) Code PhaseType ScheduleStatus StartDate HideStartDate EndDate HideEndDate ActualStartDate ActualStartDate ActualEndDate Order Medal Venue Location MediaAccess
SessionType Medal SessionName (1.N) Language Value Unit (0.N) Code PhaseType ScheduleStatus StartDate HideStartDate EndDate HideEndDate ActualStartDate ActualStartDate Order Medal Venue Location
Medal SessionName (1.N) Language Value Unit (0.N) Code PhaseType ScheduleStatus StartDate HideStartDate EndDate HideEndDate ActualStartDate ActualStartDate Order Medal Venue Location
SessionName (1.N) Language Value Unit (0.N) Code PhaseType ScheduleStatus StartDate HideStartDate EndDate HideEndDate ActualStartDate ActualIndDate Order Medal Venue Location
Language Value Unit (0.N) Code PhaseType ScheduleStatus StartDate HideStartDate EndDate HideEndDate ActualStartDate ActualEndDate Order Medal Venue Location
Unit (0.N) Code PhaseType ScheduleStatus StartDate HideStartDate EndDate HideEndDate ActualStartDate ActualEndDate Order Medal Venue Location
Unit (0,N) Code PhaseType ScheduleStatus StartDate HideStartDate EndDate HideEndDate ActualStartDate ActualEndDate Order Medal Venue Location
Code PhaseType ScheduleStatus StartDate HideStartDate EndDate HideEndDate ActualStartDate ActualEndDate Order Medal Venue Location
PhaseType ScheduleStatus StartDate HideStartDate EndDate HideEndDate ActualStartDate ActualEndDate Order Medal Venue Location
ScheduleStatus StartDate HideStartDate EndDate HideEndDate ActualStartDate ActualEndDate Order Medal Venue Location
StartDate HideStartDate EndDate HideEndDate ActualStartDate ActualEndDate Order Medal Venue Location
HideStartDate EndDate HideEndDate ActualStartDate ActualEndDate Order Medal Venue Location
EndDate HideEndDate ActualStartDate ActualEndDate Order Medal Venue Location
HideEndDate ActualStartDate ActualEndDate Order Medal Venue Location
ActualStartDate ActualEndDate Order Medal Venue Location
ActualEndDate Order Medal Venue Location
Order Medal Venue Location
Medal Venue Location
Venue Location
Location
MediaAccess
SessionCode
ModificationIndicator
StartText (0,N)
Language
Value
ItemName (1,N)
Language
Value
VenueDescription (1,1)
VenueName
LocationName

2.3.1.5 Message Values

Element: Competition (0,1)		
Attribute	M/O	Value	Description



Gen	0	S(20)	Version of the General Data Dictionary applicable to the message
Sport	0	S(20)	Version of the Sport Data Dictionary applicable to the message
Codes	0	S(20)	Version of the Codes applicable to the message

Element: Competition /Session (0,N)						
Attribute	M/O	Value	Description			
SessionCode	M	S(10)	Code of the sports competition session which contains this event unit. Usually in the format DDD00. DDD is the discipline and 00 is the session number within the discipline. For example ARC02 for the second session in Archery.			
StartDate	М	DateTime	Start date. Example: 2006-02-26T10:00:00+01:00			
EndDate	М	DateTime	End date. Example: 2006-02-26T10:00:00+01:00			
Leadin	0	m:ss	Amount of time from session start to first scheduled unit.			
Venue	M	CC @VenueCode	Venue where the session takes place			
VenueName	М	S(25)	Venue ENG Description (not code) from Common Codes			
ModificationIndicator	0	S(1)	Attribute is mandatory in the DT_SCHEDULE_UPDATE message. N = New or U = Update.			
SessionStatus	0	CC @ScheduleStatus	Only use CANCELLED if applicable. All other sessions are assumed to be scheduled. There is no change to running or finished.			
SessionType	0	CC @SessionType	Session type of the Session.			
Medal	0	S(1)	Send Y if this session includes at least one unit where a me (any type of medal) is to be decided. Do not send if no such unit.			

Element: Competition /SessionName (1,N)							
Attribute	M/O	Value	Description				
Language	M	CC @Language	Language of the Session Description				
Value	М	S(40)	Name of the sports competition session				

Sample (General)

<Session Code="ATH01" StartDate="2016-08-12T10:00:00+01:00" EndDate="2016-08-</p> 12T14:00:00+05:00" LeadIn="5:00" Venue="STA" VenueName="Olympic Stadium" > <SessionName Language="ENG" Value="Athletics Session 1" />

</Session>

<Session Code="ATH02" StartDate="2016-08-12T18:00:00+01:00" EndDate="2016-08-12T21:00:00+05:00" LeadIn="5:00" Venue="STA" VenueName="Olympic Stadium" > <SessionName Language="ENG" Value="Athletics Session 2" />

</Session>

Element: Competition /Unit (0,N)



Attribute	M/O	Value	Description
Code	M	CC @Unit	Full RSC for the unit
PhaseType	М	CC @PhaseType	Phase type for the unit
ScheduleStatus	М	CC @ScheduleStatus	Unit Status. Note that SCHEDULED_BREAK applies.
StartDate	0	DateTime	Start date. This attribute may not be sent when the @ScheduleStatus is UNSCHEDULED. For other statuses the StartDate is expected otherwise ordering is display is incorrert (including CANCELLED and POSTPONED.
			This is the scheduled Start date and time and will not be updated when an event unit starts (updated only with RESCHEDULED status)
			Where HideStartDate="Y" then this should be filled with the session start time or the start time of a group of units for all similar units and Order used for sorting. This method is not used in team sports where HideStartDate="Y" is only used temporarily to remove times.
			Example: 2006-02-26T10:00:00+01:00
HideStartDate	0	S(1)	Send 'Y' if StartDate (scheduled start time) should not be displayed. It may be an estimate or 'fake' time. Do not send if StartDate (scheduled start time) is to be displayed.
			Start times of some units depend on the finalisation of previous event units and therefore there is no fixed start time in these cases this field is set to 'Y'. When the flag is set to 'Y' then the time is used for sorting purposes but should not be displayed.
EndDate	0	DateTime	End date. This attribute may not be sent when the @ScheduleStatus is UNSCHEDULED, POSTPONED or CANCELLED. Example: 2006-02-26T10:00:00+01:00
HideEndDate	0	S(1)	Send 'Y' if EndDate scheduled end time is not to be displayed. Some event units have a scheduled end time well bounded, however, some event units in some circumstances have a scheduled end time not quite variable (example, some press conferences or tennis matches, etc.) in these cases this field is set to 'Y' and should not be displayed.
ActualStartDate	0	DateTime	This attribute is expected once the event unit has started. Example: 2006-02-26T10:03:22+01:00
ActualEndDate	0	DateTime	This attribute is expected once the event unit has finished. Example: 2006-02-26T12:43:51+01:00
Order	0	Numeric ###0	Order of the units when displayed. This field is considered in two situations:
			1. If HideStartDate = 'Y' then send at least for all Units in an affected session though it is suggested to be sent for all units in a discipline where the concept is used in the discipline.
			2. If some units start at the same time and a particular order of the units is expected.
			It is generally recommended to start at 1 in each session each day though may be ordered independently by location starting at 1 for each location in each session (where the schedule is



			ordered by location) or using other numbers to ensure the order of two using starting at the same time are displayed in the appropriate order.
Medal	0	SC @UnitMedalType	Medal indicator. Do not send if not a medal event unit
Venue	0	CC @VenueCode	Venue where the unit takes place Mandatory unless UNSCHEDULED Can use TBD if the Venue is not known yet (see CC).
Location	0	CC @Location	Location where the unit takes place. Mandatory unless UNSCHEDULED. Can use TBD if the Location is not known yet or a generic code for the discipline (see CC).
MediaAccess	0	S(6)	Only applicable for non-competition. If unit is open to media send "Open", if the unit is closed then send "Closed".
SessionCode	0	S(10)	Code of the sports competition session which contains this event unit. Usually in the format DDD00. DDD is the discipline and 00 is the session number within the discipline. For example ARC02 for the second session in Archery. If a unit finishes in a different session (due to interruption) from the starting one then the SessionCode remains the starting code.
ModificationIndicator	0	N, U	Attribute is mandatory in the DT_SCHEDULE_UPDATE message only N-New event unit U-Update event unit If ModificationIndicator='N', then include new event unit. It will be rarely used as most added units were available in "UNSCHEDULED" status. If ModificationIndicator="U", then update the event unit.

Element: Competition /Unit /StartText (0,N) This element is only used for Competition Schedules when HideStartDate is 'Y'. In this case, English Language is mandatory.							
Attribute	M/O	Value	Description				
Language	М	CC @Language	Code Language of the @Value				
Value	М	S(20) or a code if available	Text to be displayed in the case that StartDate is not to be displayed (e.g. "After M.1" or "Followed by") Using a code set or fixed text will also be directly displayed and allow end user translation.				

Element: Competitio			
Attribute	M/O	Value	Description
Language	М	CC @Language	Code Language of the @Value
Value	М	S(40)	Item Name / Unit Description.
			For competition units show the short unit description from common codes which matches the RSC. As in all messages with a description. Only the ENG description is expected.



Element: Competition /Unit /VenueDescription (1,1)						
Attribute	M/O	Value	Description			
VenueName	М	S(25)	Venue ENG Description (not code) from Common Codes			
LocationName	М	S(30)	Location ENG Description (not code) from Common Codes			

2.3.1.6 Message Sort

Sort by Session @SessionCode.

The message is sorted by Unit@StartDate then by Unit@Order then Unit@Code.

In case of event unit with no Unit@StartDate defined (example, they are in an event unit status such as UNSCHEDULED), they will be listed at the end in Unit@Code order.



2.3.2 List of participants by discipline / List of participants by discipline update

2.3.2.1 Description

A participant is considered to be any individual (type athlete, participating or not in the current games) or any official in one or several disciplines or a competitor being part of a team (team member).

Although the participant may participate in more than one event or more than one discipline, this message just contains the information for the discipline of the message, listing the information of all the events for that discipline.

It is important to note that all the sport messages that make references to athletes (start list, event unit results, etc.) will always match the athlete ID with the athlete ID in this message.

List of participants by discipline (DT_PARTIC) is a bulk message, provided for each discipline. It is a complete participant information message for one particular discipline. The arrival of this message resets all the previous participants' information for one particular discipline. This message can include a list of current athletes, officials, coaches, guides, technical officials, Reserves regardless of status.

List of participants by discipline update (DT_PARTIC_UPDATE) is an update message. It is not a complete list of participants' information by discipline message, only the participant data being modified, i.e. if some data of one participant changes, the element Participant for it with all its children and attributes must be sent.

The key of the information updated consists of the following attribute: Participant @Code. Therefore, any new or updated Participant Discipline-Event will be identified by all these attributes.

2.3.2.2 Header Values

The following table describes the message header attributes.

Attribute	Value	Comment		
CompetitionCode	CC @Competition	Unique ID for competition		
DocumentCode	CC @Discipline	Full RSC at the discipline level		
DocumentType	DT_PARTIC / DT_PARTIC_UPDATE	List of participants by discipline message		
Version	1V	Version number associated to the message's content. Ascending number		
FeedFlag	"P"-Production "T"-Test	Test message or production message.		
Date	Date	Date when the message is generated, expressed in the local time zone where the message was produced.		
Time	Time	Time up to milliseconds when the message is generated, expressed in the local time zone where the message was produced.		
LogicalDate	Date	Logical Date of events. This is the same as the physical day except when the unit or message transmission extends after midnight. See full explanation in ODF Foundation.		
Source	SC @Source	Code indicating the system which generated the message.		



2.3.2.3 Trigger and Frequency

The DT_PARTIC message is sent as a bulk message prior to the Games. It is sent several times up to the date of transfer of control to OVR after which only DT_PARTIC_UPDATE messages are sent.


The DT_PARTIC_UPDATE message is triggered when there is a modification in the data for any individual after the transfer of control to OVR.

2.3.2.4 Message Structure

The following table defines the structure of the message.

Level 1	Level 2	Level 3	Level 4	Level 5	Level 6
Competition (0,1)	•				
	Gen				
	Sport				
	Codes				
	Participant (1,N)				
		Code			
		Parent			
		Status			
		GivenName			
		FamilyName			
		PassportGivenName			
		PassportFamilyName			
		PrintName			
		PrintInitialName			
		TVName			
		TVInitialName			
		TVFamilyName			
		LocalFamilyName			
		LocalGivenName			
		Gender			
		Organisation			
		BirthDate			
		Height			
		Weight			
		PlaceofBirth			
		CountryofBirth			
		PlaceofResidence			
		CountryofResidence			
		Nationality			



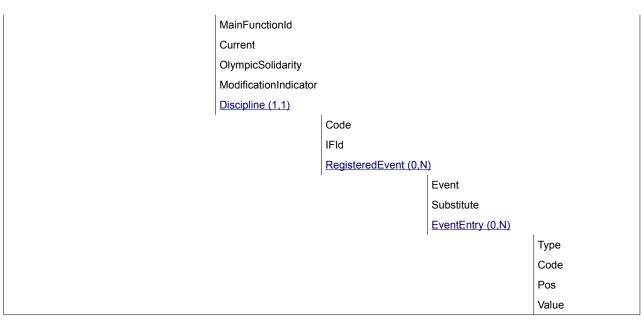

2.3.2.5 Message Values

Element: Competition (0,1)							
Attribute	M/O	Value	Description				
Gen	0	S(20)	Version of the General Data Dictionary applicable to the message				
Sport	0	S(20)	Version of the Sport Data Dictionary applicable to the message				
Codes	0	S(20)	Version of the Codes applicable to the message				

Sample (General)

 $\label{lower_competition} Competition \ Gen="SOG-2020-1.10" \ Sport="SOG-2020-FSK-1.10" \ Codes="SOG-2020-1.20" \ > \ Competition \ Gen="SOG-2020-1.20" \ > \ Competition \ Gen="SOG-2020-1.20" \ > \ Codes="SOG-2020-1.20" \ >$

Element: Competition /Participant (1,N)						
Attribute	M/O		Va	lue		Description
Code	M	S(20) zeroes	with	no	leading	It identifies an athlete or an official and the holding participant's valid information for one particular period of time. It is used to link other messages to the participant's information. Participant's information (example @Organisation) will not be the latest for the athlete/official, unless the @Code attribute is
						the same as the @Parent attribute. However, this information could be the one being valid in the particular moment of a start list, event unit results, etc.

Olympic Data Feed - © IOC



			When the participant is an historical one, then this ID will start with "A" when it is an Athlete, "C" when Coach and "O" when Official.		
Parent	M	S(20) with no leading zeroes	Participant's parent ID, which is used to link to the latest valid information for one participant. @Parent attribute should be linked to the latest participant's information, by retrieving that Athlete/Official whose @Code attribute is the same as @Parent.		
			The participant containing @Code attribute being the same as the @Parent attribute will be the one with the latest information for the participant. The @Parent attribute will only be different from @Code in the case that critical personal information has changed from previous competitions. The typical examples are Organisation (for change of country) or Name (particularly for women changing their name at marriage). Further to be clear, @Parent and @Code can only be different if Current = "false".		
Status	0	CC @ParticStatus	Participant's accreditation status this atribute is Mandatory the case of @Current="true" and it is optional in the case th @Current="false". To delete a participant, a specific value of the Status attribution is used.		
GivenName	0	S(25)	Given name in WNPA format (mixed case)		
FamilyName	М	S(25)	Family name in WNPA format (mixed case)		
PassportGivenName	0	S(25)	Passport Given Name (Uppercase).		
PassportFamilyName	0	S(25)	Passport Family Name (Uppercase).		
PrintName	M	S(35)	Print name (family name in upper case + given name in mixed case)		
PrintInitialName	M	S(18)	Print Initial name (for the given name it is sent just the initial, without dot)		
TVName	M	S(35)	TV name		
TVInitialName	M	S(18)	TV initial name		
TVFamilyName	М	S(25)	TV family name		
LocalFamilyName	0	S(25)	Family name in the local language in the appropriate case for the local language (usually mixed case)		
LocalGivenName	0	S(25)	Given name in the local language in the appropriate case for the local language (usually mixed case)		
Gender	M	CC @PersonGender	Participant's gender		
Organisation	M	CC @Organisation	Organisation ID		
BirthDate	О	YYYY-MM-DD	Date of birth. This information may not be known at the very beginning, but it will be completed for all participants after successive updates		
Height	0	S(3)	Height in centimetres. It will be included if this information is available. This information is not needed in the case of officials/referees. "-" may be used where the data is not available.		
Weight	0	S(3)	Weight in kilograms. It will be included if this information is available. This information is not needed in the case of officials/referees. Do not send attribute if data not available.		

Olympic Data Feed - © IOC



PlaceofBirth	0	S(75)	Place of Birth
CountryofBirth	0	CC @Country	Country ID of Birth
PlaceofResidence	0	S(75)	Place of Residence
CountryofResidence	0	CC @Country	Country ID of Residence
Nationality	0	CC @Country	Participant's nationality. Although this attribute is optional, in very exceptional situations it will not be known, and for this reason not ready to be sent.
MainFunctionId	0	CC @ResultsFunction	Main function In the Case of Current="true" this attribute is Mandatory.
Current	М	boolean	It defines if a participant is participating in the games (true) or is a Historical participant (false).
OlympicSolidarity	0	S(1)	Send Y if the participant is a member of the Solidarity / Scholarship Program else not sent.
ModificationIndicator	M	S(1)	'N' or 'U' Attribute is mandatory in the DT_PARTIC_UPDATE message only N-New participant (in the case that this information comes as a late entry) U-Update participant If ModificationIndicator='N', then include new participant to the previous bulk-loaded list of participants If ModificationIndicator='U', then update the participant to the previous bulk-loaded list of participants To delete a participant, a specific value of the Status attribute is used.

Element: Competition /Participant /Discipline (1,1)

All participating athletes will be assigned at least one discipline, it could be more. Each accredited official will be assigned at least one discipline, but it could be more. If an athlete or official is assigned to more than one discipline, it will be included in the participant message of both disciplines.

Attribute	M/O	Value	Description
Code	М	CC @Discipline	Full RSC of the Discipline. It is the discipline code used to fill the OdfBody @DocumentCode attribute.
IFId	0	S(16)	IF ID (competitor's federation number for the discipline if it is assigned).

Element: Competition /Participant /Discipline /RegisteredEvent (0,N)

All accredited athletes will be assigned to one or more events. There is one exception: in some sports, substitutes may be accredited without any associated event. Historical athletes are not registered to any event.

Attribute	M/O	Value	Description
Event	М	CC @Event	Full RSC of the Event
Substitute	0	S(1)	Send Y if the athlete is a substitute else do not send.

Element: Competition / Participant / Discipline / Registered Event / Event Entry (0, N)

Olympic Data Feed - © IOC



	Type	Code	Pos	Description
ENTF		RANK_WLD	Numeric #0	Pos Description: World Rank sorting order Element Expected: When available in individual events. Only in update message
	Attribute	M/O	Value	Description
	Value	М	S(4)	World Rank of the athlete May be sent empty if no rank (but @Pos needed)
ENTF	XY	RANK_PTS	N/A	Element Expected: When available in individual events. Only in update message.
	Attribute	M/O	Value	Description
	Value	М	S(6)	World Ranking Points of the athlete
ENTF	RY	SB	S(1)	Pos Description: Phase code (events or segment) in individual events. 2 - for Short Program score 1 - for Free Skating score 0 - for event total score Element Expected: Always, in case of mens and womens events. Only in update message.
	Attribute	M/O	Value	Description
	Value	М	Numeric ##0.00 or "_"	Season Best segment/total score (in the event). Send "-" for the athlete who does not have the season best score at this event/segment.
ENTF	RY	SB_RANK	S(1)	Pos Description: Phase code (events or segment) in individual events. 2 - for Short Program score 1 - for Free Skating score 0 - for event total score Element Expected: If Season Best exists for the competitor. Only for mens and womens events. Only in the UPDATE message
	Attribute	M/O	Value	Description
	Value	M	Numeric #0	Season Best Rank of the competitor at segment or total score (in the event). Season Best Rank is calculated among the competitors who participate in the Olympic Event and who have achieved a Season Best.
ENTF	RY	SB_ORDER	S(1)	Pos Description: Phase code (events or segment) in individual events. 2 - for Short Program score 1 - for Free Skating score 0 - for event total score Element Expected: If Season Best exist for the competitor. Only for mens and womens events Only in the

Olympic Data Feed - © IOC



				UPDATE message
	Attribute	M/O	Value	Description
	Value	М	Numeric #0	Order of the competitors according to their SB (Segment or Total)
ENTR	Y	РВ	S(1)	Pos Description: Phase code (events or segment) in individual events. 2 - for Short Program score 1 - for Free Skating score 0 - for event total score Element Expected: Always, in case of womens and mens events. Only in update message Update is only expected for errors and after team event.
	Attribute	M/O	Value	Description
	Value	М	Numeric ##0.00 or "_"	Personal Best segment/total score (in the event). Can send "-" for no PB

2.3.2.6 Message Sort

The message is sorted by Participant @Code



2.3.3 List of teams / List of teams update

2.3.3.1 Description

DT_PARTIC_TEAMS contains the list of teams related to the current competition.

A team is a type of competitor, being a group of two or more individual athletes participating together in one event. Pairs (tennis, figure skating, etc.) are also defined as team of two competitors. One team participates in one event of one discipline. When one team participates in multiple events, there will be one team for each event for the same group. Also when the same organisation participates in the same event twice, there will different teams.

List of teams (DT_PARTIC_TEAMS) is a bulk message by discipline. The list is always complete. The arrival of this message resets all the previous participant teams' information for that discipline. It is assumed that all teams appearing in this list are valid, in the meaning that they are participating or they could participate in one event.

List of teams update (DT_PARTIC_TEAMS_UPDATE) is an update message. It is not a complete list of teams' information message. It only contains the data of a team being modified.

2.3.3.2 Header Values

The following table describes the message header attributes.

Attribute	Value	Comment
CompetitionCode	CC @Competition	Unique ID for competition
DocumentCode	CC @Discipline	Full RSC at the discipline level
DocumentType	DT_PARTIC_TEAMS / DT_PARTIC_TEAMS_UPDATE	List of participant teams message
Version	1V	Version number associated to the message's content. Ascending number
FeedFlag	"P"-Production "T"-Test	Test message or production message.
Date	Date	Date when the message is generated, expressed in the local time zone where the message was produced.
Time	Time	Time up to milliseconds when the message is generated, expressed in the local time zone where the message was produced.
LogicalDate	Date	Logical Date of events. This is the same as the physical day except when the unit or message transmission extends after midnight. See full explanation in ODF Foundation.
Source	SC @Source	Code indicating the system which generated the message.

2.3.3.3 Trigger and Frequency

The DT_PARTIC_TEAMS message is sent as a bulk message before the Games. It is sent several times up to the date of transfer of control to OVR after which only DT_PARTIC_TEAMS_UPDATE messages are sent.

The DT_PARTIC_TEAMS_UPDATE message is triggered when there is a modification in the data for any team after the transfer of control to OVR.

Olympic Data Feed - © IOC

List of teams / List of teams update




2.3.3.4 Message Structure

The following table defines the structure of the message.

	able defines the					
Level 1	Level 2	Level 3	Level 4	Level 5	Level 6	Level 7
Competition (0,1)	1					
	Gen					
	Sport					
	Codes					
	Team (1,N)					
		Code				
		Organisation				
		Number				
		Name				
		ShortName				
		TVTeamName				
		Gender				
		Current				
		TeamType				
		ModificationIndic	ator			
		Composition (0,	1)			
		1	Athlete (0,N)			
			1	Code		
				Order		
			Team (0,N)	!		
			ı	Code		
				Number		
				Name		
				Gender		
				IFId		
				Composition (0,1)		
				'	Athlete (1,N)	
				ı		Code
						Order
				RegisteredEvent (0) <u>,1)</u>	1
					Event	
		TeamOfficials (0	<u>,1)</u>	ı		
			Official (1,N)			
			1	Code		
				Function		
				Order		



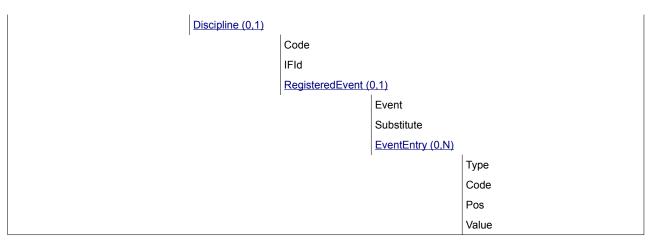

2.3.3.5 Message Values

Element: Competition (0,1)					
Attribute	M/O	Value	Description		
Gen	0	S(20)	Version of the General Data Dictionary applicable to the message		
Sport	0	S(20)	Version of the Sport Data Dictionary applicable to the message		
Codes	0	S(20)	Version of the Codes applicable to the message		

Element: Competition /Team (1,N)				
Attribute	M/O	Value	Description	
Code	M	S(20) with no leading zeroes	Team's ID	
Organisation	M	CC @Organisation	Team organisation's ID	
Number	0	Numeric #0	Team's number. If there is not more than one team for one organisation participating in one event, it is 1. Otherwise, it will be incremental, 1 for the first organisation's team, 2 for the second organisation's team, etc. Required in the case of current teams.	
Name	М	S(73)	Team name	
ShortName	М	S(40)	Team Short Name	
TVTeamName	М	S(21)	TV Team Name	
Gender	М	CC @SportGender	Gender Code of the Team	
Current	М	boolean	It defines if a team is participating in the games (true) or it is a Historical team (false)	
ТеатТуре	М	SC @TeamType	Send the team type. This is how the name is constructed to allow clients to build in other languages.	
ModificationIndicator	M	N, U, D	Attribute is mandatory in the DT_PARTIC_TEAMS_UPDATE message only N-New team (in the case that this information comes as a late entry)	



U-Update team D-Delete team If ModificationIndicator='N', then include new team to the previous bulk-loaded list of teams If ModificationIndicator='U', then update the team to the previous bulk-loaded list of teams	
previous bulk-loaded list of teams If ModificationIndicator='D', then delete the team to the previous bulk-loaded list of teams	he

Element: Competitio	Element: Competition /Team /Composition /Athlete (0,N)					
In the case of current teams the number of athletes is 2 or more.						
Attribute	M/O	Value	Description			
Code	М	S(20) with no leading zeroes	Athlete's ID of the listed team's member. Therefore, he/she makes part of the team's composition.			
Order	M	Numeric	Team member order			

Element: Competition /Team /Composition /Team (0,N)					
(ONLY applies in Team Event)					
Attribute	M/O	Value	Description		
Code	М	S(20) with no leading zeroes	Sub-Team's ID		
Number	М	Numeric #0	Team's number. Incremental number for each team within the team.		
Name	0	S(73)	Name of the couple		
Gender	M	CC @SportGender	Gender Code of the Team (will be X)		
IFId	0	S(16)	Federation number for the corresponding discipline (include if the discipline assigns international federation codes to teams)		

Element: Competition /Team /Composition /Team /Composition /Athlete (1,N)						
(ONLY applies in Team Event)						
Attribute	M/O	Value	Description			
Code	М	S(20) with no leading zeroes	Athlete's ID of the listed sub-team's member.			
Order	М	Numeric 0	Team member order			

Element: Competition /Team /Composition /Team /RegisteredEvent (0,1)						
(ONLY applies in Team Event)						
Attribute	M/O Value Description					
Event	М	CC @Unit	Full RSC of the subevent			

Element: Competition /Team /TeamOfficials /Official (1,N)						
Send if there are specific officials for the team.						
Attribute	M/O	Value	Description			
Code	М	S(20) with no leading zeroes	Official's ID of the listed team's official.			

Olympic Data Feed - © IOC

List of teams / List of teams update



Function	М	CC @ResultsFunction	Official's function for the team. Send the function code for: -Coach -Choreographer
Order	0	Numeric #0	Official's order in the team.

Element: Competition /Team /Discipline (0,1)						
Discipline is expected unless ModificationIndicator="D"						
Attribute	M/O	Value	Description			
Code	M	CC @Discipline	Full RSC of the Discipline			
IFId	0	S(16)	Federation number for the corresponding discipline (include if the discipline assigns international federation codes to teams) Only applies to pairs/couples			

Element: Competition /Team /Discipline /RegisteredEvent (0,1)						
Each current team is assigned to one event. Historical teams will not be registered to any event.						
Attribute	M/O Value Description					
Event	М	CC @Event	Full RSC of the Event			
Substitute	0	S(1)	Send Y if a substitute else not sent.			

Elem	Element: Competition /Team /Discipline /RegisteredEvent /EventEntry (0,N)							
Send	Send if there are specific couples event entries.							
	Туре Сос		Pos	Description				
ENTRY		RANK_WLD	Numeric #0	Pos Description: World Rank sorting order Element Expected: Only in update message				
	Attribute	M/O	Value	Description				
	Value	М	S(4)	World Rank of the couple May be sent empty if no rank (but @Pos needed)				
ENTF	ΥY	RANK_PTS	N/A	Element Expected: When available for couples. Only in update message				
	Attribute	M/O	Value	Description				
	Value	M	S(6)	World Ranking Points of the couple				
ENTRY		SB	S(1)	Pos Description: Phase code for couples (e.g.: at Pairs and Ice Dance events: 2 for Short Program/Dance score, 1 for Free Skating/Dance score 0 for event total score. Element Expected: Always when available, in case of Pairs/Ice Dance events. Only in the UPDATE message				
	Attribute	M/O	Value	Description				
	Value	М	Numeric	Season Best segment/total score (in the				



			##0.00 or "-"	event). Send "-" for the couple who does not have the season best score at this event/segment.
ENTF	RΥ	SB_RANK	S(1)	Pos Description: Phase code (events or segment) in pairs/couples' events. 2 - for short program / rhythm dance score 1 - for free skating / free dance score 0 - for event total score Element Expected: If Season Best exist for the competitor. Only for Pairs/Ice Dance events. Not for Team event. Only in the UPDATE message
	Attribute	M/O	Value	Description
	Value	M	Numeric #0	Season Best Rank of the competitor at segment or total score (in the event). Season Best Rank is calculated among the competitors who participate in the Olympic Event and who have achieved a Season Best.
ENTF	RY	SB_ORDER	S(1)	Pos Description: Phase code (events or segment) in pairs/couples' events. 2 - for short program / rhythm dance score 1 - for free skating / free dance score 0 - for event total score Element Expected: If Season Best exist for the competitor. Only for Pairs/Ice Dance events. Not for Team event. Only in the UPDATE message
	Attribute	M/O Value Descripti		Description
	Value	M	Numeric #0	Order of the competitors according to their SB (Segment or Total)
ENTF	RY	PB	S(1)	Pos Description: Phase code for couples (e.g.: at Pairs event: 2 for Short Program/Dance score, 1 for Free Skating/Dance score 0 for event total score. Element Expected: Always, in case of Pairs and Ice Dance events. Update is only expected for errors and after team event
	Attribute	M/O	Value	Description
	Value	M	Numeric ##0.00 or "_"	Couple's Personal Best segment/total score (in the event). Can send "-" for no PB

2.3.3.6 Message Sort

The message is sorted by Team @Code.

Olympic Data Feed - © IOC
Technology and Information Department



2.3.4 Event Unit Start List and Results

2.3.4.1 Description

The Event Unit Start List and Results is a message containing both the start list and results information of the competitors in one (individual or team) event unit.

The Event Unit Start List and Results is a mandatory message for all sports.

This is always a full message and all applicable elements and attributes are always sent.

2.3.4.2 Header Values

The following table describes the message header attributes

Attribute	Value	Comment		
CompetitionCode	CC @Competition	Unique ID for competition		
DocumentCode	CC @Unit	Full RSC of the unit, one message per unit.		
DocumentSubcode	N/A	N/A		
DocumentType	DT_RESULT	Event Unit Start List and Results message		
DocumentSubtype	N/A	N/A		
Version	1V	Version number associated to the message's content. Ascending number		
ResultStatus	CC @ResultStatus	It indicates whether the result is official or unofficial (or intermediate etc). START_LIST LIVE (used when the competition starts) INTERMEDIATE UNOFFICIAL OFFICIAL		
FeedFlag	"P"-Production "T"-Test	Test message or production message.		
Date	Date	Date when the message is generated, expressed in the local time zone where the message was produced.		
Time	Time	Time up to milliseconds when the message is generated, expressed in the local time zone where the message was produced.		
LogicalDate	Date	Logical Date of events. This is the same as the physical day excewhen the unit or message transmission extends after midnight. See full explanation in ODF Foundation.		
Source	SC @Source	Code indicating the system which generated the message.		

2.3.4.3 Trigger and Frequency

This message is sent:

- * As soon as the start list is available and any changes [inc. IRMs] (START_LIST)
- * When the competition starts and after every competitor completes their performance (LIVE)
- * After each group of competitors (INTERMEDIATE)
- * After the unit is finished (UNOFFICIAL / OFFICIAL) as applicable.
- * After any change (except during the current competitor unless it is a correction to a different competitor)



2.3.4.4 Message Structure

The following table defines the structure of the message.

The following ta	ble defines the	structure of the	message.			
Level 1	Level 2	Level 3	Level 4	Level 5	Level 6	Level 7
Competition (0,1)						
	Gen					
	Sport					
	Codes					
	ExtendedInfos (0,	<u>1)</u>				
		UnitDateTime (0,1)			
			StartDate			
		ExtendedInfo (0,N)			
			Туре			
			Code			
			Pos			
			Value			
		SportDescription (<u>0,1)</u>			
			DisciplineName			
			EventName			
			Gender			
			SubEventName			
		VenueDescription	(0,1)			
			Venue			
			VenueName			
			Location			
			LocationName			
	Officials (0,1)		1			
'		Official (1,N)				
			Code			
			Function			
			Order			
			Description (1,1)			
			'	GivenName		
				FamilyName		
				Gender		
				Organisation		
			ExtOfficial (0,N)	,		
			•	Туре		
				Code		
				Pos		



	Value
Result (1,N)	'
Rank	
RankEqual	
Result	
IRM	
QualificationMark	
SortOrder	
StartOrder	
StartSortOrder	
ResultType	
ExtendedResults ((0,1)
	ExtendedResult (1,N)
	Туре
	Code
	Pos
	Value
	Value2
	IRM
RecordIndicators ((0,1)
	RecordIndicator (1,N)
	Order
	Code
	RecordType
1	Equalled
Competitor (1,1)	1
	Code
	Туре
	Organisation
	Description (0,1)
	TeamName
	IFId
	EventUnitEntry (0,N)
	Туре
	Code
	Pos
	Value
	Composition (0,1)
	Athlete (0,N)





2.3.4.5 Message Values

Element: Competition (0,1)						
Attribute	M/O	Value	Description			
Gen	0	S(20)	Version of the General Data Dictionary applicable to the message			
Sport	0	S(20)	Version of the Sport Data Dictionary applicable to the message			
Codes	0	S(20)	Version of the Codes applicable to the message			

Element: Competition /E	Element: Competition /ExtendedInfos /UnitDateTime (0,1)				
Actual start date and time / end date and time. (do not include until unit starts)					
Attribute	M/O	Value	Description		
StartDate	M	DateTime	Actual start date-time. Do not include until unit starts. (When the first performance starts)		

Elem	lement: Competition /ExtendedInfos /ExtendedInfo (0,N)				
	Type	Code	Pos	Description	
UI		STARTERS	N/A	Element Expected: Always	
	Attribute	M/O	Value	Description	
	Value	М	Numeric ##0	Send the number of competitors on the start list	
		on /ExtendedInfos /Ex		completed the unit without IRM	
	Attribute	Value	Description		
	Code	COMPLETE			
	Pos	N/A			



	Value	Numeric ##0	Send the number of co	ompetitors whose event unit is completed
DISPL	AY	LAST_COMP	N/A	Element Expected: When available and if the unit is LIVE, INTERMEDIATE or UNOFFICIAL.
	Attribute	M/O	Value	Description
	Value	M	(20) without leading zeroes	Send the competitor ID of the last competitor to compete and receive a result.

Sample (Individual)

ExtendedInfos>

- <UnitDateTime StartDate="2012-08-07T11:01:00+01:00" />

- </ExtendedInfo>

Element: Competition	Element: Competition /ExtendedInfos /SportDescription (0,1)					
Sport Descriptions in Text.						
Attribute	M/O	Value	Description			
DisciplineName	М	S(40)	Discipline ENG Description (not code) from Common Codes			
EventName	М	S(40)	Event ENG Description (not code) from Common Codes.			
Gender	М	CC @SportGender	Gender code for the event unit			
SubEventName	M	S(40)	EventUnit ENG Description (not code) from Common Codes			

Element: Competition /ExtendedInfos /VenueDescription (0,1)					
Venue Names in Text.					
Attribute	M/O	Value	Description		
Venue	М	CC @VenueCode	Venue Code		
VenueName	М	S(25)	Venue ENG Description (not code) from Common Codes		
Location	М	CC @Location	Location code		
LocationName	М	S(30)	Location ENG Description (not code) from Common Codes		

Element: Competition	Element: Competition /Officials /Official (1,N)					
Attribute	M/O	Value	Description			
Code	М	S(20) with no leading zeroes	Official's code			
Function	М	CC @ResultsFunction	Official's function			
Order	М	Numeric #0	Order of officials. (according to the different panels of Judges, Technical etc.)			

Element: Competition /Officials /Official /Description (1,1) Officials extended information.

Olympic Data Feed - © IOC **Technology and Information Department** Event Unit Start List and Results



Attribute	M/O	Value	Description
GivenName	0	S(25)	Given name in WNPA format (mixed case)
FamilyName	М	S(25)	Family name in WNPA format (mixed case)
Gender	М	CC @PersonGender	Gender of the official
Organisation	М	CC @Organisation	Official's organisation

Elem	nent: Competition /Officials /Official /ExtOfficial (0,N)					
	Туре	Code	Pos	Description		
EO		POSITION	N/A	Element Expected: Always for Judges else do not send		
	Attribute	M/O	Value	Description		
	Value	M	S(2)	Send the position for the judge (1-n)		
EO		GROUP	N/A	Element Expected: Always		
	Attribute	M/O	Value	Description		
	Value	M	SC @Panel	Send proposed code		

Sample (Officials)

Element: Competition /Result (1,N)					
For each Event Unit Results message, there must be at least one competitor with a result element in the event unit.					
Attribute	M/O	Value	Description		
Rank	0	String	Rank of the competitor in the event unit (not cumulative).		
RankEqual	0	S(1)	Identifies if a rank has been equalled. Send Y if applicable else not sent.		
Result	0	Numeric	Result points for the unit (segment points).		



		##0.00	
IRM	0	SC @IRM	IRM for the event unit Send only in the case @ResultType is IRM
QualificationMark	0	SC @QualificationMark	Send 'Q' in the case the competitor is qualified for the next unit. Qualification code for Short Program and Rhythm Dance only, to indicate if the skater/couple qualified. Do not send for Final. Do not send if not applicable.
SortOrder	M	Numeric #0	This attribute is a sequential number with the order of the results for the event unit, if they were to be presented. It is mostly based on the rank, but it should be used to sort out rank ties as well as results without rank. Prior to the unit the order is the same as StartSortOrder.
StartOrder	0	Numeric #0	The start order for the competitor in the unit.
StartSortOrder	М	Numeric #0	Used to sort all start list competitors in an event unit.
ResultType	0	SC @ResultType	Type of the @Result attribute.

M/ O M	l	Value Numeric ##0 S(20) with no leading zeroes SC @IRM Numeric #0 or "TOT"	team event ID of the overall team in the team event to identify to which team the athlete/couple belongs. IRM in the segment in the case of team event Pos Description: Send the Executed element sequential order number, or "TOT" for Totals Element Expected:
O M		Numeric ##0 S(20) with no leading zeroes SC @IRM Numeric #0 or	Team points in the segment in the case of team event ID of the overall team in the team event to identify to which team the athlete/couple belongs. IRM in the segment in the case of team event Pos Description: Send the Executed element sequential order number, or "TOT" for Totals Element Expected:
M O	1	##0 S(20) with no leading zeroes SC @IRM Numeric #0 or	ID of the overall team in the team event to identify to which team the athlete/couple belongs. IRM in the segment in the case of team event Pos Description: Send the Executed element sequential order number, or "TOT" for Totals Element Expected:
0		zeroes SC @IRM Numeric #0 or	IRM in the segment in the case of team event Pos Description: Send the Executed element sequential order number, or "TOT" for Totals Element Expected:
-		Numeric #0 or	Pos Description: Send the Executed element sequential order number, or "TOT" for Totals Element Expected:
EL	LEMENT	#0 or	Send the Executed element sequential order number, or "TOT" for Totals Element Expected:
			When data is available
M/	1/0	Value	Description
М	l	Numeric ##0.00	Send the element score (as specified @Pos), or Total aggregated element score in particular for this event unit (segment) (for "TOT").
ent: Competition / When available	/Result /ExtendedResu	ilts /ExtendedResult /Exte	nsion
Va	alue	Description	
BA	ASE		
N/A	/A		
		Send the Base Value (exa Not applicable for @Pos=	mple: 0.80, 5.30, 10.10). TOT
	Vhen available V B N #	Vhen available Value BASE N/A Numeric ##0.00	Value Description BASE N/A Numeric Send the Base Value (exa



Attribute	Value	Description
Code	BASE_TOT	
Pos	N/A	
Value	Numeric ##0.00	Total aggregated elements' base value for this event unit (segment). Applicable only for @Pos=TOT
		esults /ExtendedResult /Extension of a program (maximum 3 in the period)
Attribute	Value	Description
Code	FACTOR_FLAG	
Pos	N/A	
Value	S(1)	Send "Y" if factor is applicable for this element else do not send.
Sub Element: Com Expected When av		esults /ExtendedResult /Extension
Attribute	Value	Description
Code	ELEMENT_CODE	
Pos	N/A	
Value	SC @Element	Send the Executed Element code (e.g.: "SISt1" -for element "Stra Line Step Sequence"-, "3Lo" -for "Triple Loop"-, etc.) Not applicable for @Pos=TOT
Sub Element: Com Expected When av		esults /ExtendedResult /Extension
Attribute	Value	Description
Code	ELEMENT_DESC	
Pos	N/A	
Value	S(100)	Send the Executed Element description, in text (e.g.: "Straight Line Sequence", "Triple Loop", etc.) Not applicable for @Pos=TOT
Sub Element: Com Expected When av		esults /ExtendedResult /Extension
Attribute	Value	Description
Code	GOE	
Pos	N/A	
Value	Numeric -0.00 or 0.00	Send the Grade of Execution (example: 0.20, -0.30). Minus symbol necessary, but not plus symbol in case of positive. Not applicable for @Pos=TOT
Sub Element: Com Expected If is app		esults /ExtendedResult /Extension
Attribute	Value	Description
	INFO	
Code		
Code Pos	N/A	



	Attribute	Value	Description		
	Code	JUDGE			
	Pos	Numeric #0	Send the Judge position		
	Value	Numeric (-)0 or "-" (dash)	Judge @Pos score for the Executed element number specified a ELEMENT @Pos (the parent element). Use the sign "-" only in the case of negative score. Dash "-" may apply when an expected score is missing like in the case when a Judge cannot do judging. Not applicable for @Pos=TOT		
ER		COMPONENT	SC @Component	Pos Description: Specific Program Component code. Use Pos=TOT only for Total Program Components Score. Do not use for detailed Program Component score and information Element Expected: When available	
	Attribute	M/O	Value	Description	
	Value	М	Numeric ##0.00	Factored program component score for specific program component, or Factored total component score for this event unit (segment) (for "TOT").	
	Value2	0	Numeric ##0.00	Unfactored program component score for specific program component Always expected except for TOT	
	Sub Element: Competition /Result /Extend Expected Only for specific program comp				
	Attribute	Value	Description		
	Code	FACTOR			
	Pos	N/A			
	Value	Numeric #0.00	Factor for the Program Component specified at COMPONENT @Pos (the parent element). Not applicable for @Pos=TOT		
	Expected Only after the	etition /Result /ExtendedResults /ExtendedResult /Extension the announcement of competitor's score. gram component @Pos (not TOT)			
	Attribute	Value	Description		
	Code	JUDGE			
	Pos	Numeric #0	Send the Judge position		
	Value	Numeric #0.00 Or "-" (dash)	Judge @Pos score for the Program Component specified COMPONENT @Pos (the parent element). Dash "-" may apply when an expected score is missing like in the when a Judge cannot do judging. Not applicable for @Pos=TOT		
ER		DEDUCTION	SC @Deduction or "TOT"	Pos Description: Specific Deduction code, or "TOT" for Total aggregated deductions Use Pos=TOT only for Total aggregated Deduction Score. For Deduction detailed information use Deduction Code as per ISU standard Deduction code list	



			Element Expected: Always with the scores. Specific deductions if applicable else do not send (only TOT in this case)		
Attribute	M/O	Value	Description		
Value	М	Numeric 0.00 Or -#0.00	Deduction score for specific deduction (as specified @Pos), or Total aggregated deductions in particular for this event unit (segment) (for "TOT").		
Expected Alv	Sub Element: Competition /Result /ExtendedResults /ExtendedResult /Extension Expected Always with results (if applicable deduction). Only for specific deduction @Pos (not TOT)				
Attribute	Value	Description			
Code	DEDUCTION_DE	SC			
Pos	N/A				
Value	S(40)	As per ISU stand Not applicable for	ard Deduction description r @Pos=TOT		
Expected On Applicable o		competitor's score. And	sult /Extension I, only for specific deduction @Pos (not TOT). ion, Music Requirements Violation and Violation of		
Attribute	Value	Description			
Code	JUDGE				
Pos	Numeric #0	Send the Judge p	position		
Value	Numeric -#0.00 Or "-" (dash)	(the parent eleme			

Sample (Individual)



```
<Result Rank="1" ResultType="POINTS" Result="178.64" SortOrder="1" StartOrder="7" StartSortOrder="7">
<ExtendedResults>
    <ExtendedResult Type="ER" Code="ELEMENT" Pos="TOT" Value="89.66" >
      <Extension Code="BASE_TOT" Value="83.47"/>
    </ExtendedResult>
    <ExtendedResult Type="ER" Code="ELEMENT" Pos="1" Value="7.50" >
     <Extension Code="ELEMENT_CODE" Value="4S" />
<Extension Code="ELEMENT_DESC" Value="Quad Salchow" />
      <Extension Code="BASE" Value="10.50" />
     <Extension Code="GOE" Value="-3.00" />
<Extension Code="INFO" Value="<" />
      <Extension Code="JUDGE" Pos="1" Value="0" />
      <Extension Code="JUDGE" Pos="2" Value="-1" />
     <Extension Code="JUDGE" Pos="9" Value="0" />
    </ExtendedResult>
    <ExtendedResult Type="ER" Code="ELEMENT" Pos="2" Value="12.44" >
     <Extension Code="ELEMENT_CODE" Value="4T" />
<Extension Code="ELEMENT_DESC" Value="Quad Toeloop" />
      <Extension Code="BASE" Value="10.30" />
     <Extension Code="GOE" Value="2.14" />
      <Extension Code="JUDGE" Pos="1" Value="2" />
      <Extension Code="JUDGE" Pos="2" Value="1" />
      <Extension Code="JUDGE" Pos="9" Value="1" />
    </ExtendedResult>
   <ExtendedResult Type="ER" Code="ELEMENT" Pos="13" Value="3.64" >
     <Extension Code="ELEMENT_CODE" Value="CCoSp3" />
<Extension Code="ELEMENT_DESC" Value="Change Foot Combination Spin" />
      <Extension Code="BASE" Value="3.00" />
     <Extension Code="GOE" Value="0.64" />
      <Extension Code="JUDGE" Pos="1" Value="0" />
     <Extension Code="JUDGE" Pos="9" Value="-1" />
   </ExtendedResult>
    <ExtendedResult Type="ER" Code="COMPONENT" Pos="TOT" Value="90.98" />
   <ExtendedResult Type="ER" Code="COMPONENT" Pos="SS" Value="9.07" Value2="9.35" > <Extension Code="FACTOR" Value="1.60" />
      <Extension Code="JUDGE" Pos="1" Value="6.50" />
      <Extension Code="JUDGE" Pos="2" Value="6.00" />
     <Extension Code="JUDGE" Pos="9" Value="7.25" />
    </ExtendedResult>
```

Element: Competition /Result /RecordIndicators /RecordIndicator (1,N)

"Result" refers only to the result of the segment e.g. Short Program/Dance or Free Skating/Dance. Only when there is a Season Best broken for the segment after the end of a performance. Please note that "The season best scores from the Short Program/Dance, Free Skating/Dance and Total Score are not related as they may have occurred in different events".

Attribute	M/O	Value	Description
Order	М	Numeric	The hierarchy (priority) for types of record from 1 to n. (Can use the Order column from CC @RecordType for reference).
Code	М	CC @RecordCode	Code which describes the record broken by the result value.
RecordType	М	CC @RecordType	Code which specifies the level at which the record is broken.
Equalled	0	S(1)	Send "Y" in the case that the record has been equalled else do not send.

Olympic Data Feed - © IOC

Event Unit Start List and Results



Sample (Individual)

<RecordIndicators>
<RecordIndicator Order="1" Code="FSKWSINGLES------" RecordType="SB"/>
</RecordIndicators>

Element: Competition	Element: Competition /Result /Competitor (1,1)							
Attribute	M/O	Value	Description					
Code	М	S(20) with no leading zeroes	Competitor's ID For Competitor @Type=T, it will be: Team ID for Pairs / Ice Dance event units. (inc. within team event) Otherwise, Athlete's ID (for Competitor @Type=A)					
Туре	M	S(1)	A for athlete, T for team					
Organisation	0	CC @Organisation	Competitor's organisation					

Element: Competition /Result /Competitor /Description (0,1)						
Used in couples only						
Attribute M/O Value Description						
TeamName	М	S(73)	Name of the team/couple.			
IFId	0	S(16)	International Federation ID			

Elem	Element: Competition /Result /Competitor /EventUnitEntry (0,N)							
For c	For couples							
	Туре	Code	Pos	Description				
EUE		GROUP	N/A	Element Expected: Always				
	Attribute	M/O	Value	Description				
	Value	М	Numeric #0	Send the warm-up group number				
EUE		SB	N/A	Element Expected: When available				
	Attribute	M/O	Value	Description				
	Value	М	Numeric ##0.00	Season best in the segment				
EUE		РВ	N/A	Element Expected: When available				
	Attribute	M/O	Value	Description				
	Value	М	Numeric ##0.00	Personal Best in the segment				
EUE		ELEMENT_CODE	Numeric #0	Pos Description: Send the planned element sequential order number Element Expected:				



				When available
	Attribute	M/O	Value	Description
	Value	М	SC @Element	Send the Planned Element code (e.g.: "SISt1" -for element "Straight Line Step Sequence"-, "3Lo" -for "Triple Loop"-, etc.)
EUE		ELEMENT_DESC	Numeric #0	Pos Description: Send the planned element sequential order number Element Expected: When available
	Attribute	M/O	Value	Description
	Value	M	S(100)	Send the Planned Element description, in text (e.g.: "Straight Line Step Sequence", "Triple Loop", etc.)
EUE		MUSIC	N/A	Element Expected: When available
	Attribute	M/O	Value	Description
	Value	M	S(80)	Send in text the title of the music to be played during the performance
EUE		START_TIME	N/A	Element Expected: When available
	Attribute	M/O	Value	Description
	Value	M	hh:mm:ss	Start time for the competitor
EUE		FINISH_TIME	N/A	Element Expected: When available
	Attribute	M/O	Value	Description
	Value	M	hh:mm:ss	Planned finish time for the competitor
EUE		COACH	N/A	Element Expected: For couple competitors (inc Team Event)
	Attribute	M/O	Value	Description
	Value	M	S(73)	Send in free text the names of the coach(es)

		petitor /Composition /Athlete	(-)/
Attribute	M/O	Value	Description
Code	М	S(20) with no leading zeroes	Athlete's ID. Can belong to a team member or an individual athlete.
Order	M	Numeric 0	If Competitor @Type="T": Order attribute used to sort team members -for Pairs and Ice Dance events (couples) (i.e.: 1-for woman, 2 for man), -for Team event, only those members that participate If Competitor @Type="A" then order is 1

Element: Competition /Result /Competitor /Composition /Athlete /Description (1,1)						
Athletes extended infe	Athletes extended information.					
Attribute M/O Value Description						
GivenName	0	S(25)	Given name in WNPA format (mixed case)			



FamilyName	М	S(25)	Family name in WNPA format (mixed case)
Gender	М	CC @PersonGender	Gender of the athlete
Organisation	М	CC @Organisation	Athletes' organisation
BirthDate	0	Date	Birth date (example: YYYY-MM-DD). Must include if the data is available
IFId	0	S(16)	International Federation ID

Element: Competition /Result /Competitor /Composition /Athlete /EventUnitEntry (0,N)					
For s	ingles in all events				
	Туре	Code	Pos	Description	
EUE		GROUP	N/A	Element Expected: Always	
	Attribute	M/O	Value	Description	
	Value	М	Numeric #0	Send the warm-up group number	
EUE		SB	N/A	Element Expected: When available	
	Attribute	M/O	Value	Description	
	Value	М	Numeric ##0.00	Season best in the segment	
EUE		РВ	N/A	Element Expected: When available	
	Attribute	M/O	Value	Description	
	Value	М	Numeric ##0.00	Personal Best in the segment	
EUE		ELEMENT_CODE	Numeric #0	Pos Description: Send the planned element sequential order number Element Expected: When available	
	Attribute	M/O	Value	Description	
	Value	М	SC @Element	Send the Planned Element code (e.g.: "SISt1" -for element "Straight Line Step Sequence"-, "3Lo" -for "Triple Loop"-, etc.)	
EUE		ELEMENT_DESC	Numeric #0	Pos Description: Send the planned element sequential order number Element Expected: When available	
	Attribute	M/O	Value	Description	
	Value	М	S(100)	Send the Planned Element description, in text (e.g.: "Straight Line Step Sequence", "Triple Loop", etc.)	
EUE		MUSIC	N/A	Element Expected: When available	
	Attribute	M/O	Value	Description	
	Value	M	S(80)	Send in text the title of the music to be played during the performance	



EUE		START_TIME	N/A	Element Expected: When available
	Attribute	M/O	Value	Description
	Value	M	hh:mm:ss	Start time for the competitor
EUE		FINISH_TIME	N/A	Element Expected: When available
	Attribute	M/O	Value	Description
	Value	M	hh:mm:ss	Planned finish time for the competitor
EUE		COACH	N/A	Element Expected: For singles competitors (only in Individuals or Team events).
	Attribute	M/O	Value	Description
	Value	M	S(73)	Send in free text the names of the coaches

2.3.4.6 Message Sort

Sort by Result @SortOrder



2.3.5 Current Information

2.3.5.1 Description

The Current message is a message containing the current information for a competition which is live. The message is used to send the latest applicable information and in some sports with a running clock, also the clock information.

In figure skating this message is used to provide information about the current and next skater. The message is updated during a performance with the scores available at that time.

2.3.5.2 Header Values

The following table describes the message header attributes.

Attribute	Value	Comment
CompetitionCode	CC @Competition	Unique ID for competition
DocumentCode	CC @Unit	Full RSC of the unit.
DocumentSubcode	N/A	N/A
DocumentType	DT_CURRENT	Current message
DocumentSubtype	N/A	N/A
Version	1V	Version number associated to the message's content. Ascending number
FeedFlag	"P"-Production "T"-Test	Test message or production message.
Date	Date	Date when the message is generated, expressed in the local time zone where the message was produced.
Time	Time	Time up to milliseconds when the message is generated, expressed in the local time zone where the message was produced.
LogicalDate	Date	Logical Date of events. This is the same as the physical day except when the unit or message transmission extends after midnight. See full explanation in ODF Foundation.
Source	SC @Source	Code indicating the system which generated the message.

2.3.5.3 Trigger and Frequency

This message is sent:

- * When a new competitor starts (or about to start in the case of the first in each group). (This competitor will be considered current)
- * When a when a Warmup group is in Progress or an Ice Resurfacing is in progress
- * Every 5 seconds during a performance with any data from the performance.
- * Immediately after the competitor completes the performance and the data is available.
- * At the end of a group to remove the current competitor

Each message will only include the competitor currently on the ice or about to start and the one to follow.

2.3.5.4 Message Structure

The following table defines the structure of the message.

Level 1 Level 2 Level 3 Level 4 Level 5 Level 6

Olympic Data Feed - © IOC

Current Information



Competition (0,1)					
	Gen				
	Sport				
	Codes				
	ExtendedInfos (0,1)				
		ExtendedInfo (1,N)			
			Туре		
			Code		
			Pos		
	٦		Value		
	Result (0,N)	T			
		Rank			
		RankEqual			
		Result			
		IRM			
		QualificationMark			
		SortOrder			
		StartOrder			
		StartSortOrder			
		ResultType			
		ExtendedResults (0,1	1		
			ExtendedResult (1,N	1	
				Type	
				Code	
				Pos	
				Value Value2	
				IRM	
		Competitor (1,N)		IIXIVI	
		Competitor (1,11)	Code		
			Туре		
			Organisation		
			Composition (0,1)		
			23	Athlete (0,N)	
					Code
					Order

2.3.5.5 Message Values



Element: Competition (0,1)					
Attribute	M/O	Value	Description		
Gen	0	S(20)	Version of the General Data Dictionary applicable to the message		
Sport	0	S(20)	Version of the Sport Data Dictionary applicable to the message		
Codes	0	S(20)	Version of the Codes applicable to the message		

Elem	ent: Competition /Extende	edInfos /ExtendedInfo (1,	N)	
	Type	Code	Pos	Description
DISPI	.AY	CURRENT	N/A	Element Expected: When available
	Attribute	M/O	Value	Description
	Value	M	S(20) without leading zeroes	Send the competitor ID of the current or about to start competitor.
	Sub Element: Competition Expected When applicable	on /ExtendedInfos /Extendele	dedInfo /Extension	
	Attribute	Value	Description	
	Code	SCORE_DONE		
	Pos	N/A		
	Value	S(1)	Send "Y" in the case that not send.	scoring is complete for the competitor else do
	Expected In all segment			sition @Pos but only until the score is mpetitor)
	Attribute	Value	Description	
	Code	TO_BEAT		
	Pos	Numeric #0	Send the rank which the competitor is trying to beat a segments and 13 plus <last qualification="" rank=""> programs/rhythm dance (not in team event). Only incompetitor is in this rank.</last>	
	Value	Numeric ##0.00	Send the points needed (to beat) for the corresponding rank (in @Pos): To clarify in each situation: - in short programs/rhythm dance (in team and not team) this is the score to beat for the individual/couple within the segment - in free program (not within teams) this is the score the individual/couple needs to beat in the segment to make the rank in the overall ranking - in free program (within teams) this is the score the individual/couple needs to beat in the segment to make the rank within the segment.	
DISPI	.AY	NEXT	N/A	Element Expected: When available
	Attribute	M/O	Value	Description
	Value	М	S(20) without leading zeroes	Send the competitor ID of the next competitor.
DISPI	AY	ICE	Numeric #0	Pos Description: Send the warm-up group number, only when warm-up in progress (for WARMUP), otherwise do not send. Element Expected:



				When applicable
	Attribute	M/O	Value	Description
	Value	М	S(10)	WARMUP when warm-up in progress RESURFACE when resurfacing break
CURF	RENT	STATUS	S(8)	Pos Description: ON_ICE when Competitor becomes current STARTED when Running Time starts FINISHED when Running Time stops Element Expected: When available
	Attribute	M/O	Value	Description
	Value	М	DateTime	UNOFFICIAL Timestamp of current competitor's STATUS change. This value shall not be used for scoring purposes to indicate if the performance is too short, in time or too long.
CURF	RENT	TECHNICAL_PANEL_R EADY	N/A	Element Expected: When available
	Attribute	M/O	Value	Description
	Value	М	S(1)	Send "Y" when Technical Panel has authorized all elements. Otherwise do not send.
CURF	RENT	JUDGES_SCORES_SE ND	N/A	Element Expected: When available
	Attribute	M/O	Value	Description
	Value	M	Numeric #0	Counter to indicate how many judges and referee have sent their scores. Otherwise do not send.

Sample (General)

<ExtendedInfos>

- <ExtendedInfo Type="DISPLAY" Code="CURRENT" Value="2111355" />
 <ExtendedInfo Type="DISPLAY" Code="NEXT" Value="2231358" />
 <ExtendedInfo Type="CURRENT" Code="STATUS" Pos="STARTED" Value="2018-02-16T10:00:00+01:00" />
 <ExtendedInfo Type="CURRENT" Code="TECHNICAL_PANEL_READY" Value="Y" >

Element: Competition /Result (0,N)					
Attribute	M/O	Value	Description		
Rank	0	String	Rank of the competitor in the event unit (not cumulative).		
RankEqual	0	S(1)	Identifies if a rank has been equalled. Send Y if applicable else not sent.		
Result	0	Numeric ##0.00	Result points for the event unit (segment points).		
IRM	0	SC @IRM	The invalid result mark (IRM) for the event unit, in case it is assigned.		
QualificationMark	0	SC @QualificationMark	Send 'Q' in the case the competitor is qualified for the next unit. Qualification code for Short Program and Rhythm Dance only, to indicate if the skater/couple qualified. Don't send for		



			Final. Do not send if not applicable.
SortOrder	M	Numeric #0	This attribute is a sequential number with the order of the results for the particular event unit, if they were to be presented. It is mostly based on the rank, but it should be used to sort out rank ties as well as results without rank. Prior to the unit the order is the same as StartSortOrder.
StartOrder	0	Numeric #0	The start order of the competitor.
StartSortOrder	М	Numeric #0	Used to sort all start list competitors in an event unit.
ResultType	0	SC @ResultType	Type of the @Result attribute.

	Туре	Code	Pos	Description
ER		TEAM	N/A	Element Expected: In segments within the team competition
	Attribute	M/O	Value	Description
	Value	0	Numeric ##0	Team points in the segment in the case of team event
	Value2	М	S(20) with no leading zeroes	ID of the overall team in the team event to identify to which team the athlete/couple belongs
	IRM	0	SC @IRM	IRM in the segment in the case of team event
ER		ELEMENT	Numeric #0 or "TOT"	Element Expected: Send the Executed element sequential order number, or "TOT" for Totals
	Attribute	M/O	Value	Description
	Value	M	Numeric ##0.00	Send the element Score (as specified @Pos), or Total aggregated element score in particular
				for this event unit (segment) (for "TOT").
	Sub Element: Com Expected When av		Results /ExtendedResult /Exte	for this event unit (segment) (for "TOT").
			Results /ExtendedResult /Exte	for this event unit (segment) (for "TOT").
	Expected When av	vailable		for this event unit (segment) (for "TOT").
	Expected When av	vailable Value		for this event unit (segment) (for "TOT").
	Attribute Code	Value BASE	Description	for this event unit (segment) (for "TOT"). Insign In
	Expected When average Attribute Code Pos Value	Value BASE N/A Numeric #0.00 petition /Result /Extended	Description Send the Base Value (exa	for this event unit (segment) (for "TOT"). ension mple: 0.80, 5.30, 10.10). TOT
	Expected When av Attribute Code Pos Value Sub Element: Com	Value BASE N/A Numeric #0.00 petition /Result /Extended	Send the Base Value (exa Not applicable for @Pos=	for this event unit (segment) (for "TOT"). ension mple: 0.80, 5.30, 10.10). TOT
	Expected When av Attribute Code Pos Value Sub Element: Com Expected When av	Value BASE N/A Numeric #0.00 petition /Result /Extended vailable	Description Send the Base Value (exa Not applicable for @Pos=	for this event unit (segment) (for "TOT"). ension mple: 0.80, 5.30, 10.10). TOT
	Expected When average Attribute Code Pos Value Sub Element: Come Expected When average Attribute	Value BASE N/A Numeric #0.00 petition /Result /Extended value	Description Send the Base Value (exa Not applicable for @Pos=	for this event unit (segment) (for "TOT"). ension mple: 0.80, 5.30, 10.10). TOT



Expected Whe	n applicable in the second half o	of a program (maximum 3 in the period)	
Attribute	Value	Description	
Code	FACTOR_FLAG		
Pos	N/A		
Value	S(1)	Send "Y" if factor is applicable for this element else do not send.	
Sub Element: 0 Expected Whe		esults /ExtendedResult /Extension	
Attribute	Value	Description	
Code	ELEMENT_CODE		
Pos	N/A		
Value	SC @Element	Send the Executed Element code (e.g.: "SISt1" -for element "Straight Line Step Sequence"-, "3Lo" -for "Triple Loop"-, etc.) Not applicable for @Pos=TOT	
	Sub Element: Competition /Result /ExtendedResults /ExtendedResult /Extension Expected When available		
Attribute	Value	Description	
Code	ELEMENT_DESC		
Pos	N/A		
Value	S(100)	Send the Executed Element description, in text (e.g.: "Straight Line Step Sequence", "Triple Loop", etc.) Not applicable for @Pos=TOT	
	Competition /Result /ExtendedRoon as the element in reference	esults /ExtendedResult /Extension has been executed	
Attribute	Value	Description	
Code	EXECUTION_TIME		
Pos	N/A		
Value	m:ss	Time since the beginning of the performance when the particular element was executed Not applicable for @Pos=TOT	
Sub Element: 0 Expected Whe		esults /ExtendedResult /Extension	
Attribute	Value	Description	
Code	GOE		
Pos	N/A		
Value	Numeric -0.00 Or 0.00	Send the Grade of Execution (example: 0.20, -0.30). Minus symbol if necessary, but not plus symbol in case of positive. Not applicable for @Pos=TOT	
Sub Element: 0 Expected Whe	•	esults /ExtendedResult /Extension	
Attribute	Value	Description	
Code	INFO		
Pos	N/A		
Value	SC @ElementInfo	Send appropriate element info code Not applicable for @Pos=TOT	



		mpetition /Result /ExtendedF the executed element is und		Extension nel or the review by judge panel has been		
	Attribute	Value	Description	Description		
	Code	REVIEW_STATUS				
	Pos	N/A				
	Value	S(16)	UNDER_REVIEW if the	ED if review has been requested ne element is under review when the element has been reviewed os=TOT		
ER		COMPONENT	SC @Component	Pos Description: Specific Program Component code. Use Pos=TOT only for Total Program Components Score. Do not use for detailed Program Component score and information Element Expected: When available		
	Attribute	M/O	Value	Description		
	Value	M	Numeric ##0.00	Factored program component score for specific program component, or Factored total component score for this even unit (segment) (for "TOT").		
	Value2	0	Numeric ##0.00	Unfactored program component score for specific program component. Always expected except for TOT		
	Sub Element: Competition /Result /ExtendedResults /ExtendedResult /Extension Expected Only for specific program component @Pos (not TOT)					
	Attribute	Value	Description			
	Code	FACTOR				
	Pos	N/A				
	Value	Numeric #0.00	Factor for the Progra (the parent element). Not applicable for @P	m Component specified at COMPONENT @Posos=TOT		
ER		DEDUCTION	SC @Deduction Or "TOT"	Pos Description: Specific Deduction code, or "TOT" for Total aggregated deductions Use Pos=TOT only for Total aggregated Deduction Score. For Deduction detailed information use Deduction Code as per ISU standard Deduction code list Element Expected: Always with the scores. Specific deductions if applicable else do not send (only TOT in this case)		
				Toma (omj 101 millio caco)		
	Attribute	M/O	Value	Description		



Attribute	Value	Description
Code	DEDUCTION_DESC	
Pos	N/A	
Value	S(40)	As per ISU standard Deduction description Not applicable for @Pos=TOT

Sample (General)

```
<Result Rank="1" ResultType="POINTS" Result="178.64" SortOrder="1" StartOrder="7" StartSortOrder="7">
  <ExtendedResults>
   <ExtendedResult Type="ER" Code="ELEMENT" Pos="TOT" Value="89.66" >
     <Extension Code="BASE_TOT" Value="83.47"/>
   </ExtendedResult>
    <ExtendedResult Type="ER" Code="ELEMENT" Pos="1" Value="7.50" >
     <Extension Code="ELEMENT_CODE" Value="4S" />
     <Extension Code="ELEMENT_DESC" Value="Quad Salchow" />
     <Extension Code="BASE" Value="10.50" />
     <Extension Code="GOE" Value="-3.00" />
     <Extension Code="INFO" Value="<" />
     <Extension Code="EXECUTION_TIME" Value="0:42" />
    </ExtendedResult>
   <ExtendedResult Type="ER" Code="ELEMENT" Pos="2" Value="12.44" > 
<Extension Code="ELEMENT_CODE" Value="4T" />
     <Extension Code="ELEMENT_DESC" Value="Quad Toeloop" />
     <Extension Code="BASE" Value="10.30" />
<Extension Code="GOE" Value="2.14" />
     <Extension Code="EXECUTION_TIME" Value="0:56" />
    </ExtendedResult>
   <ExtendedResult Type="ER" Code="ELEMENT" Pos="13" Value="3.64" >
     <Extension Code="ELEMENT_CODE" Value="CCoSp3" />
<Extension Code="ELEMENT_DESC" Value="Change Foot Combination Spin" />
     <Extension Code="BASE" Value="3.00" />
<Extension Code="GOE" Value="0.64" />
     <Extension Code="EXECUTION_TIME" Value="2:31" />
    </ExtendedResult>
    <ExtendedResult Type="ER" Code="COMPONENT" Pos="TOT" Value="90.98" />
    <ExtendedResult Type="ER" Code="COMPONENT" Pos="SS" Value="9.07" Value2="9.57" >
     <Extension Code="FACTOR" Value="1.60" />
    </ExtendedResult>
```

Element: Competition	Element: Competition /Result /Competitor (1,N)						
Attribute	M/O	Value	Description				
Code	M	S(20) with no leading zeroes.	Competitor's ID For Competitor @Type=T, it will be: Couple's ID for Pairs and Ice Dance event units including within team event. Otherwise, Athlete's ID (for Competitor @Type=A).				
Туре	M	S(1)	A for athlete, T for team				
Organisation	М	CC @Organisation	Competitor's organisation				

Element: Competition /Result /Competitor /Composition /Athlete (0,N)



Attribute	M/O	Value	Description
Code	M	S(20) with no leading zeroes	Athlete's ID, corresponding to either a team member or a single athlete
Order	M	Numeric	If Competitor @Type="T": Order attribute used to sort team members for Pairs and Ice Dance events (couples) (i.e.: 1-for woman, 2 for man), If Competitor @Type="A" then order is 1

2.3.5.6 Message Sort

Sort by Result @SortOrder.



2.3.6 Cumulative Results

2.3.6.1 Description

The Cumulative Results is a message containing the cumulative results for the competitors in a group of units. This message is used when the competitor scores accumulate over the different units.

2.3.6.2 Header Values

The following table describes the message header attributes.

Attribute	Value	Comment
CompetitionCode	CC @Competition	Unique ID for competition
DocumentCode	CC @Event	Full RSC of the event. One message per event. Note that this message is not applicable for training.
DocumentSubcode	N/A	N/A
DocumentType	DT_CUMULATIVE_RESULT	Cumulative Results message
DocumentSubtype	N/A	N/A
Version	1V	Version number associated to the message's content. Ascending number
ResultStatus	CC @ResultStatus	It indicates the status of the results. The expected values are START_LIST LIVE INTERMEDIATE UNOFFICIAL OFFICIAL
FeedFlag	"P"-Production "T"-Test	Test message or production message.
Date	Date	Date when the message is generated, expressed in the local time zone where the message was produced.
Time	Time	Time up to milliseconds when the message is generated, expressed in the local time zone where the message was produced.
LogicalDate	Date	Logical Date of events. This is the same as the physical day except when the unit or message transmission extends after midnight. See full explanation in ODF Foundation.
Source	SC @Source	Code indicating the system which generated the message.

2.3.6.3 Trigger and Frequency

The cumulative results accumulate scores/results over a number of units so are generally sent after each DT_RESULT message if the cumulative message applies (usually using same ResultStatus at DT_RESULT). When there is no unit in progress the cumulative results will have INTERMEDIATE status.

The first version is triggered at the same time as the start list of the first unit is triggered.

This message is sent (all events, individuals, couples, teams):

- * When the start list of the first unit is sent (START_LIST)
- * When the second unit is changed to "GETTING READY" for individuals and couples) (INTERMEDIATE)
- * During each unit send after each competitor (LIVE)
- * After each unit is complete in the event (INTERMEDIATE)

Olympic Data Feed - © IOC

Cumulative Results

Technology and Information Department



 * After the last unit is complete (UNOFFICIAL / OFFICIAL as appropriate) Update with and changes.

2.3.6.4 Message Structure


The following table defines the structure of the message.

Level 1	Level 2	Level 3	Level 4	Level 5	Level 6	Level 7	Level 8	Level 9
Competition (<u>0,1)</u>							
	Gen							
	Sport							
	Codes							
	ExtendedInfo	s (0,1)						
		Progress (0,1)					
		1	LastUnit					
		SportDescript	tion (0,1)					
			DisciplineNam	ie				
			EventName					
		I	Gender					
		VenueDescrip	1					
			Venue					
			VenueName					
			Location					
	1		LocationName)				
	Result (1,N)	l						
		Rank						
		RankEqual						
		ResultType Result						
		IRM						
		Qualification	/lark					
		SortOrder	nan					
		ExtendedRes	sults (0.1)					
			ExtendedResu	ult (1,N)				
				Туре				
				Code				
				Pos				
				Value				
		RecordIndica	tors (0,1)	1				
			RecordIndicate	or (1,N)				
			·	Order				
				Code				



```
RecordType
                           Equalled
ResultItems (0,1)
             ResultItem (1,N)
                           Unit
                            Order
                           Result (1,1)
                                         Rank
                                         RankEqual
                                         ResultType
                                         Result
                                         ResultPoints
                                         IRM
                                         SortOrder
                                         ExtendedResults (0,1)
                                                       ExtendedResult (1,N)
                                                                      Туре
                                                                      Code
                                                                      Pos
                                                                      Value
                                         RecordIndicators (0,1)
                                                       RecordIndicator (1,N)
                                                                      Order
                                                                      Code
                                                                      RecordType
                                                                      Equalled
Competitor (1,1)
             Code
             Type
             Organisation
             Description (0,1)
                            TeamName
                           IFId
             Composition (1,1)
                           Athlete (0,N)
                                         Code
                                          Order
                                         Description (1,1)
                                                       GivenName
```



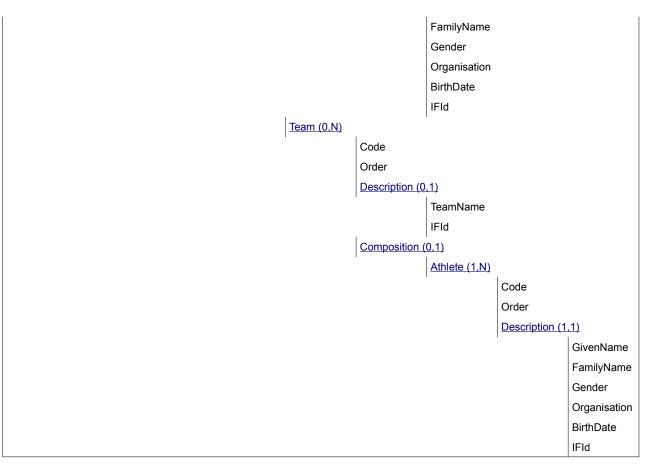

2.3.6.5 Message Values

Element: Competition (0,1)						
Attribute	M/O	Value	Description			
Gen	0	S(20)	Version of the General Data Dictionary applicable to the message			
Sport	0	S(20)	Version of the Sport Data Dictionary applicable to the message			
Codes	0	S(20)	Version of the Codes applicable to the message			

Element: Competition	n/ExtendedInfo	s /Progress (0,1)	
Attribute	M/O	Value	Description
LastUnit	М	CC @Unit	Full RSC of the first unit (if not started), current (if live) or most recent unit information included in the message.

Element: Competition /ExtendedInfos /SportDescription (0,1)						
Sport Descriptions in Te	Sport Descriptions in Text.					
Attribute	M/O	Value	Description			



DisciplineName	М	S(40)	Discipline ENG Description (not code) from Common Codes
EventName	М	S(40)	Event ENG Description (not code) from Common Codes.
Gender	М	CC @SportGender	Gender code for the event unit

Element: Competition /ExtendedInfos /VenueDescription (0,1)					
Venue Names in Text. DO NOT INCLUDE unless all at single venue and location.					
Attribute	Attribute M/O Value Description				
Venue	М	CC @VenueCode	Venue Code		
VenueName	М	S(25)	Venue ENG Description (not code) from Common Codes		
Location	0	CC @Location	Location code		
LocationName	0	S(30)	Location ENG Description (not code) from Common Codes		

Element: Competition /Result (1,N)

For any cumulative results message, there should be at least one competitor being awarded a cumulative result after one event unit or phase.

Attribute	M/O	Value	Description
Rank	0	S(2)	Rank of the competitor in the cumulative result. For singles and couples events, do not include the rank during the second segment until the competitor has completed the unit. Not applicable for the Team event. This attribute is optional because the competitor could get an invalid result mark.
RankEqual	0	S(1)	Send 'Y' in case of the Rank has been equalled else do not send. For singles and couples events, do not include the rank during the second segment until the competitor has completed the unit. Not applicable for the Team event.
ResultType	0	SC @ResultType	Result type
Result	0	Numeric ##0.00 Or #0 (Team)	Cumulative result of the competitor. For singles and couples events, do not include the result during the second segment until the competitor has completed the unit. Send just in the case @ResultType is POINTS
IRM	0	SC @IRM	IRM (invalid result mark) for the cumulative result, in case it is assigned. Send just in the case @ResultType is IRM
QualificationMark	0	SC @QualificationMark	The code which indicates the competitor is qualified for the final. Only applies after the last unit in the Team Event Qualification.
SortOrder	М	Numeric	This attribute is a sequential number with the order of the results for the cumulative result, if they were to be presented. It is mostly based on the rank, but it should be used to sort out rank ties as well as results without rank. For singles and couples events, during the second segment those without rank will be ordered following their start order in the current unit.

Element: Competition /Result /ExtendedResults /ExtendedResult (1,N)



	Туре	Code	Pos	Description
ER		FNR	N/A	Element Expected: When applicable
	Attribute	M/O	Value	Description
	Value	М	S(1)	Send 'Y' if the competitor did not reach the final / last unit, else do not send
ER		WD	N/A	Element Expected: When applicable
	Attribute	M/O	Value	Description
	Value	М	S(1)	Send 'Y' if the competitor withdrew at the final / last unit, else do not send
ER		QUAL_POINTS	N/A	Element Expected: Only at Team event. Only after qualification phase has finished
	Attribute	M/O	Value	Description
	Value	М	Numeric #0	Team Total Qualification score

Element: Competition /Result /RecordIndicators /RecordIndicator (1,N)

Cumulative result's record indicator. "Result" refers only to the total score.

Only when there is a Season Best broken for the total score after the end of a performance. Please pay attention that "The season best scores from the Short Program/Dance, Free Skating/Dance and Total Score are not related as they may have occurred in different events".

Attribute	M/O	Value	Description
Order	М	Numeric	The hierarchy (priority) for types of record from 1 to n.
Code	М	CC @RecordCode	Code which describes the record broken by the result value.
RecordType	М	CC @RecordType	Code which specifies the level at which the record is broken.
Equalled	0	S(1)	Send Y in the case that the record has been equalled else do not send.

Element: Competition /Result /ResultItems /ResultItem (1,N)

Identifier of unit, for the schedule item to which it is going to be included the result summary. ResultItem /Result will be for one particular previous unit.

Attribute	M/O	Value	Description
Unit	М	CC @Unit	Full RSC of the unit
Order	М	Numeric #0	Order of the units (chronological)

Element: Competition /Result /ResultItems /ResultItem /Result (1,1)

For any Event Unit Results message, there should be at least one competitor being awarded a result for the event unit.

Attribute	M/O	Value	Description
Rank	0	Text	Rank of the competitor in the result for the event unit or phase identified by /ResultItems /ResultItem.
RankEqual	0	S(1)	Send 'Y' in case of the Rank has been equalled else do not send.

Olympic Data Feed - © IOC

Cumulative Results



ResultType	М	SC @ResultType	Type of the @Result attribute for the event unit identified by /ResultItems /ResultItem.
Result	0	Numeric ##0.00 Or "-" (dash)	The result of the competitor for the event unit identified by /ResultItems /ResultItem. In the case of team event this is the judges' score. Dash "-" may apply when an expected score is missing like in the case where a team member failed to compete in his/her round (e.g.: a Male athlete in Men round of Team event, Qualification phase)
ResultPoints	O	Numeric #0 Or "-" (dash)	Team points in the team event. Dash "-" may apply when an expected score is missing like in the case where a team member failed to compete in his/her round (e.g: a Male athlete in Men round of Team event, Qualification phase) In the case of a team getting an overall IRM then do not send this attribute.
IRM	0	SC @IRM	The invalid result mark (IRM), in case it is assigned for the event unit identified by /ResultItems /ResultItem Send just in the case @ResultType is IRM
SortOrder	М	Numeric	Used to sort all results in an event unit identified by /ResultItems /ResultItem

Elem	Element: Competition /Result /ResultItems /ResultItem /Result /ExtendedResults /ExtendedResult (1,N)						
	Type Code Pos			Description			
ER		COMPETITOR	N/A	Element Expected: When available in Team event.			
	Attribute	M/O	Value	Description			
	Value	М	S(20) without leading zeroes	Send the competitor code, with the athlete or the couple.			

Element: Competition / Result / Resul

Result's record indicator.

"Result" refers only to the result of the segment e.g. Short Program/Dance or Free Skating/Dance.

Only when there is a Season Best broken for the segment after the end of a performance. Please pay attention that "The season best scores from the Short Program/Dance, Free Skating/Dance and Total Score are not related as they may have occurred in different events".

Attribute	M/O	Value	Description
Order	М	Numeric	The hierarchy (priority) for types of record from 1 to n.
Code	М	CC @RecordCode	Code which describes the record broken by the result value.
RecordType	М	CC @RecordType	Code which specifies the level at which the record is broken.
Equalled	0	S(1)	Send Y in the case that the record has been equalled else do not send.

Element: Competition /Result /Competitor (1,1)				
Attribute	M/O	Value	Description	
Code	M	S(20) with no leading zeroes	Competitor's ID For Competitor @Type=T, it will be: Team's ID for Team event, or, Couple's ID for Pairs and Ice Dance events.	



			Otherwise, Athlete's ID (for Competitor @Type=A).
Туре	M	S(1)	T for team, A for athlete
Organisation	М	CC @Organisation	Competitor's organisation

Element: Competition /Result /Competitor /Description (0,1)				
Competitors extended information.				
Attribute	M/O	Value	Description	
TeamName	M	S(73)	Name of the team same as in DT_PARTIC_TEAM. Only applies for teams / groups.	
IFId	0	S(16)	International Federation ID of the couple	

Element: Competition /Result /Competitor /Composition /Athlete (0,N)					
Attribute	M/O	Value	Description		
Code	М	S(20) with no leading zeroes	Athlete's ID, corresponding to either a team member or a single athlete		
Order	M	Numeric	Order attribute used to sort team members in a team (if Competitor @Type="T") or 1 if Competitor @Type="A".		

Element: Competition	Element: Competition /Result /Competitor /Composition /Athlete /Description (1,1)				
Athletes extended inf	Athletes extended information.				
Attribute	M/O	Value	Description		
GivenName	0	S(25)	Given name in WNPA format (mixed case)		
FamilyName	М	S(25)	Family name in WNPA format (mixed case)		
Gender	М	CC @PersonGender	Gender of the athlete		
Organisation	М	CC @Organisation	Athletes' organisation		
BirthDate	0	Date	Birth date (example: YYYY-MM-DD). Must include if the data is available		
IFId	0	S(16)	International Federation ID		

Element: Competition /Result /Competitor /Composition /Team (0,N)					
Attribute	M/O	Value	Description		
Code	M	S(20) with no leading zeroes	Competitor's ID Couple's ID for Pairs and Ice Dance events within the team event.		
Order	М	Numeric	Order of the pairs		

Element: Competition /Result /Competitor /Composition /Team /Description (0,1)				
Attribute	M/O	Value	Description	
TeamName	M	S(73)	Name of the couple	
IFId	0	S(16)	International Federation ID of the couple	

Element: Competition /	Result /Competi	tor /Composition /Team /C	Composition /Athlete (1,N)
Attribute	M/O	Value	Description

Olympic Data Feed - © IOC Technology and Information Department Cumulative Results



Code	М	S(20) with no leading zeros	Athlete ID of the team's member.
Order	М	Numeric	Couple member order, woman is 1, man is 2

Element: Competition /Result /Competitor /Composition /Team /Composition /Athlete /Description (1,1)					
Attribute	M/O	Value	Description		
GivenName	0	S(25)	Given name in WNPA format (mixed case)		
FamilyName	М	S(25)	Family name in WNPA format (mixed case)		
Gender	М	CC @PersonGender	Gender of the athlete		
Organisation	0	CC @Organisation	Athletes' organisation		
BirthDate	0	Date	Birth date (example: YYYY-MM-DD). Must include if the data is available		
IFId	0	S(16)	International Federation ID		

Sample (Individual Event)

```
<Result Rank="1" ResultType="POINTS" Result="280.09" SortOrder="1">
 <ResultItems>
   <ResultItem Unit="FSKMSINGLES-----QUAL000100--">
     <Result Rank="1" ResultType="POINTS" Result="101.45" SortOrder="1" />
   <ResultItem Unit="FSKMSINGLES-----FNL-000100--">
     <Result Rank="1" ResultType="POINTS" Result="178.64" SortOrder="1" />
   </ResultItem>
 </ResultItems>
 <Competitor Code="2000000" Type="A" Organisation="GER" >
   <Composition>
   <a href="4">Athlete Code="2000000" Order="1" ></a>
     <Description GivenName="John" FamilyName="Smith" Gender="M" Organisation="GER" BirthDate="1994-12-15" />
   </Athlete>
   </Composition>
 </Competitor>
</Result>
```

Sample (Team Event)



```
<Result Rank="1" ResultType="POINTS" Result="19" SortOrder="1">
 <ResultItems>
                                         --QUAL0001MN--">
   <ResultItem Unit="FSKXTEAM-----
     <Result Rank="2" ResultType="POINTS" Result="89.24" ResultPoints="9" SortOrder="2" />
       <ExtendedResult Type="ER" Code="COMPETITOR" Value="1234567" />
     </ResultItem>
   <ResultItem Unit="FSKXTEAM----
                                         --QUAL0002LD--">
     <Result Rank="1" ResultType="POINTS" Result="79.14" ResultPoints="10" SortOrder="1" />
       <ExtendedResult Type="ER" Code="COMPETITOR" Value="1234111" />
   </ResultItem>
 </ResultItems>
 <Competitor Code="FSKXTEAM----RUS01" Type="T" Organisation="RUS" >
   <Description Name="Russian Federation" />
   <Composition>
     <Athlete Code="2001879" Order="1" >
       <Description GivenName="John" FamilyName="Smith" Gender="M" Organisation="RUS" BirthDate="1994-12-15"/>
     </Athlete>
     <a href="Athlete Code="2001881" Order="2" >
       <Description GivenName="Elena" FamilyName="Petrova" Gender="F" Organisation="RUS" BirthDate="1998-02-13" />
     </Athlete>
     <Team Code="FSKXPAIRS---RUS01" Order="1" >
       <Description Name="Jan Brown / Jack Smith" />
       <a href="4">Athlete Code="1001879" Order="1" ></a>
         <Description GivenName="Jan" FamilyName="Brown" Gender="F" Organisation="RUS" BirthDate="1994-12-15"/>
       </Athlete>
       <Athlete Code="3001881" Order="2" >
         <Description GivenName="Jack" FamilyName="Smith" Gender="M" Organisation="RUS" BirthDate="1987-02-13" />
       </Athlete>
 </Composition>
```

2.3.6.6 Message Sort

The ResultItems should be ordered in the same order in which they took place, earliest to latest.

Result @SortOrder will be the attribute used to sort the results.

During a unit (particularly units where athletes participate one-by-one). Then the order should be:

- 1) All athletes finished the current unit ordered by overall rank
- 2) All athletes on course (in the order of their result at the intermediate; in case of several intermediates from the one further down the course to the one nearest to the start)
- 3) All athlete still to start in the current unit (start order)
- 4) All athletes not qualified, but having a score from previous units
- 5) All athletes with IRM (sorting according to Discipline/ORIS standard order)



2.3.7 Event Final Ranking

2.3.7.1 Description

The event final ranking is a message containing the final results and ranking at the completion of one particular event, either for individual athletes or for aggregated athletes.

The final ranking message is a generic message for all sports, including the full event final result for all competitors who were either ranked, got an Invalid Rank Mark (disqualified, etc.), or both.

2.3.7.2 Header Values

The following table describes the message header attributes.

Attribute	Value	Comment
CompetitionCode	CC @Competition	Unique ID for competition
DocumentCode	CC @Event	Full RSC of the event, one message is sent for each event.
DocumentType	DT_RANKING	Event Final ranking message
Version	1V	Version number associated to the message's content. Ascending number
ResultStatus	CC @ResultStatus	Result status, indicates whether the data is official. OFFICIAL
FeedFlag	"P"-Production "T"-Test	Test message or production message.
Date	Date	Date when the message is generated, expressed in the local time zone where the message was produced.
Time	Time	Time up to milliseconds when the message is generated, expressed in the local time zone where the message was produced.
LogicalDate	Date	Logical Date of events. This is the same as the physical day except when the unit or message transmission extends after midnight. See full explanation in ODF Foundation.
Source	SC @Source	Code indicating the system which generated the message.

2.3.7.3 Trigger and Frequency

This message is only triggered after the event is complete and official. Trigger also after any change.

2.3.7.4 Message Structure


The following table defines the structure of the message.

Level 1	Level 2	Level 3	Level 4	Level 5	Level 6	Level 7	Level 8	Level 9
Competition (<u>0,1)</u>							
	Gen							
	Sport							
	Codes							
	ExtendedInfos	s (0,1)						



```
SportDescription (0,1)
                           DisciplineName
                           EventName
                           Gender
Result (1,N)
              Rank
             RankEqual
             ResultType
             Result
              IRM
             SortOrder
             ExtendedResults (0,1)
                           ExtendedResult (1,N)
                                         Туре
                                         Code
                                         Pos
                                         Value
              Competitor (1,1)
                           Code
                           Туре
                           Organisation
                           Description (0,1)
                                         TeamName
                                         IFId
                           Composition (1,1)
                                         Athlete (0,N)
                                                       Code
                                                       Order
                                                       Description (1,1)
                                                                     GivenName
                                                                     FamilyName
                                                                     Gender
                                                                     Organisation
                                                                     BirthDate
                                                                     IFId
                                         Team (0,N)
                                                       Code
                                                       Order
                                                       Description (0,1)
```



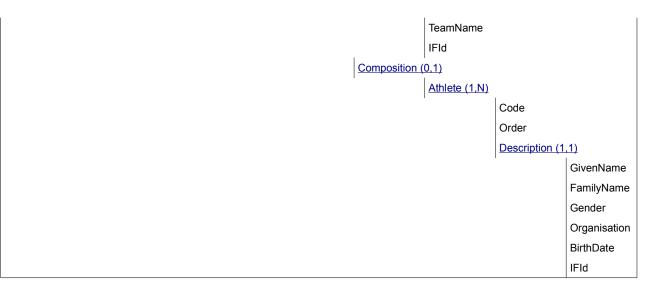

2.3.7.5 Message Values

Element: Competition (0,1)						
Attribute	M/O	Value	Description			
Gen	0	S(20)	Version of the General Data Dictionary applicable to the message			
Sport	0	S(20)	Version of the Sport Data Dictionary applicable to the message			
Codes	0	S(20)	Version of the Codes applicable to the message			

Element: Competition /ExtendedInfos /SportDescription (0,1) Sport Description in text						
Attribute	M/O	Value	Description			
DisciplineName	M	S(40)	Discipline ENG Description (not code) from Common Codes			
EventName	М	S(40)	Event ENG Description (not code) from Common Codes. Must be included if it is a single event			
Gender	М	CC @SportGender	Gender code for the event unit. Must be included if it is a single gender			

Element: Competition /Result (1,N)						
For any event final ranking message, there should be at least one competitor being awarded a result for the event.						
Attribute M/O Value Description						
Rank	0	String	Final rank of the competitor in the event. This attribute is optional as the competitor may have got an invalid result mark.			
RankEqual	0	S(1)	Send Y if the rank is equalled, else do not send.			
ResultType	0	SC @ResultType	Type of the @Result attribute			
Result	0	Numeric ##0.00 or	Final result for the event. Send just in the case @ResultType is points			



		"-" (dash) or #0 (Team event)	
IRM	0	SC @IRM	The invalid result mark, in case it is assigned
SortOrder	М	Numeric	This attribute is a sequential number with the order of the competitors as specified for the discipline.

Elem	Element: Competition /Result /ExtendedResults /ExtendedResult (1,N)						
	Туре	Code	Pos	Description			
ER		FNR	N/A	Element Expected: When applicable			
	Attribute	M/O	Value	Description			
	Value	M	S(1)	Send 'Y' if the competitor did not reach the final (Final Not Reached)			
ER		WD	N/A	Element Expected: When applicable			
	Attribute	M/O	Value	Description			
	Value	M	S(1)	Send 'Y' if the competitor withdrew from the final / last unit, else do not send.			

Sample (Individual event)

```
<Result Rank="16" ResultType="POINTS" Result="120.54" SortOrder="16" >
  <Competitor Type="A" Code="1067129" Organisation="SUI" >
    <Composition>
      <Athlete Code="1067129" Order="1" />
        <Description GivenName="James" FamilyName="Black" Gender="M" Organisation="SUI" BirthDate="1994-12-18"</p>
IFId="ISUFS0045987" />
    </Composition>
  </Competitor>
</Result>
<Result Rank="17" ResultType="POINTS" Result="57.34" SortOrder="17">
  <ExtendedResult Type="ER" Code="FNR" Value="Y" />
<Competitor Type="A" Code="1090447" Organisation="NZL" >
    <Composition>
      <a href="1090447" Order="1">
<Description GivenName="Jon" FamilyName="Smith" Gender="M" Organisation="NZL" BirthDate="1994-12-15"
IFId="ISUFS0019977" />
     </Athlete>
    </Composition>
```

Element: Competition /Result /Competitor (1,1) Competitor related to one final event result.						
Attribute	M/O	Value	Description			
Code	М	S(20) with no leading zeroes	Competitor's ID For Competitor @Type=T, it will be: Team's ID for Team event, or Couple's ID for Pairs and Ice Dance events. Otherwise, Athlete's ID (for Competitor @Type=A).			
Туре	М	S(1)	A for athlete, T for team			
Organisation	0	CC @Organisation	Competitor's organisation			



Element: Competition /Result /Competitor /Description (0,1)					
Attribute	M/O	Value	Description		
TeamName	M	S(73)	Name of the team. Only applies for team/couple		
IFId	0	S(16)	International Federation ID. Only applies for couples		

Element: Competition /Result /Competitor /Composition /Athlete (0,N)						
Attribute	M/O	Value	Description			
Code	M	S(20) with no leadir zeroes	Athlete's ID, corresponding to either a team member or a single athlete Team members should be participating in the event.			
Order	М	Numeric #0	Order attribute used to sort team members in a team (if Competitor @Type="T") or 1 if Competitor @Type="A".			

Element: Competition /Result /Competitor /Composition /Athlete /Description (1,1)					
Attribute	M/O	Value	Description		
GivenName	0	S(25)	Given name in WNPA format (mixed case)		
FamilyName	М	S(25)	Family name in WNPA format (mixed case)		
Gender	М	CC @PersonGender	Gender of the athlete		
Organisation	М	CC @Organisation	Athletes' organisation		
BirthDate	0	Date	Birth date (example: YYYY-MM-DD). Must include if the data is available		
IFId	0	S(16)	International Federation ID		

Element: Competition /Result /Competitor /Composition /Team (0,N)					
Only applicable for Team Event					
Attribute	M/O	Value	Description		
Code	M	S(20) with no leading zeroes	Couple's ID for Pairs and Ice Dance events.		
Order	М	Numeric	Value is 1, 2for each team in the team.		

Element: Competition /Result /Competitor /Composition /Team /Description (0,1)					
Attribute M/O Value Description					
TeamName	M	S(73)	Name of the couple		
IFId	0	S(16)	International Federation ID. Only applies for couples		

Element: Competition /Result /Competitor /Composition /Team /Composition /Athlete (1,N)					
Attribute	M/O Value Description				
Code	М	S(20) with no leading zeros	Athlete ID		
Order	М	Numeric #0	Order attribute used to sort team members		

Element: Competition /Result /Competitor /Composition /Team /Composition /Athlete /Description (1,1)

Olympic Data Feed - © IOC
Technology and Information Department

Event Final Ranking



Attribute	M/O	Value	Description
GivenName	0	S(25)	Given name in WNPA format (mixed case)
FamilyName	M	S(25)	Family name in WNPA format (mixed case)
Gender	М	CC @PersonGender	Gender of the athlete
Organisation	М	CC @Organisation	Athletes' organisation
BirthDate	0	Date	Birth date (example: YYYY-MM-DD). Must include if the data is available.
IFId	0	S(16)	International Federation ID

2.3.7.6 Message Sort

Sort by Result @SortOrder



2.3.8 Event's Medallists

2.3.8.1 Description

The Event's Medallists is a message containing the list of medallists awarded in one event.

2.3.8.2 Header Values

The following table describes the message header attributes.

Attribute	Value	Comment				
CompetitionCode	CC @Competition	Unique ID for competition				
DocumentCode	CC @Event	Full RSC at event level				
DocumentType	DT_MEDALLISTS	Event's Medallists message				
Version	1V	Version number associated to the message's content. Ascending number				
ResultStatus	CC @ResultStatus	It indicates whether the result is unofficial, official or partial. UNOFFICIAL OFFICIAL PARTIAL				
FeedFlag	"P"-Production "T"-Test	Test message or production message.				
Date	Date	Date when the message is generated, expressed in the local time zo where the message was produced.				
Time	Time	Time up to milliseconds when the message is generated, expressed in the local time zone where the message was produced.				
LogicalDate	Date	Logical Date of events. This is the same as the physical day except when the unit or message transmission extends after midnight. See full explanation in ODF Foundation.				
Source	SC @Source	Code indicating the system which generated the message.				

2.3.8.3 Trigger and Frequency

The message is sent with ResultStatus=PARTIAL when the information of the medallist is known but the final event Unit is not yet finished.

Sent immediately after the unit is finished and the results are unofficial. In case of any delay in publishing unofficial results it must be sent at the latest 5 minutes before any ceremony starts with Status=UNOFFICIAL. To be clear, this message must be sent before any ceremony.

The message is sent with ResultStatus=OFFICIAL when the medallists are officially known in the sport.

For some sports, bronze medals are known before the end of the final event unit. In this case the message is sent the first time with the bronze medallists (PARTIAL), and the second time with all the medallists.

Trigger also after any change.

2.3.8.4 Message Structure


The following table defines the structure of the message.

Level 1	Level 2		- U	Level 6	Level 7	Level 8	Level 9
Competition (C	<u>),1)</u>	•				•	•



```
Gen
Sport
Codes
ExtendedInfos (0,1)
             SportDescription (0,1)
                           DisciplineName
                           EventName
                           Gender
              VenueDescription (0,1)
                           Venue
                           VenueName
Medal (1,N)
              Code
              Unit
             Date
             Competitor (1,1)
                           Code
                           Туре
                           Order
                           Organisation
                           Description (0,1)
                                         TeamName
                                         IFId
                           Composition (1,1)
                                         Athlete (0,N)
                                                       Code
                                                       Order
                                                       Description (1,1)
                                                                    GivenName
                                                                    FamilyName
                                                                    Gender
                                                                    Organisation
                                                                    BirthDate
                                                                    IFId
                                                       ExtAthMedals (0,1)
                                                                    ExtAthMedal (1,N)
                                                                                   Туре
                                                                                   Code
                                                                                  Pos
```



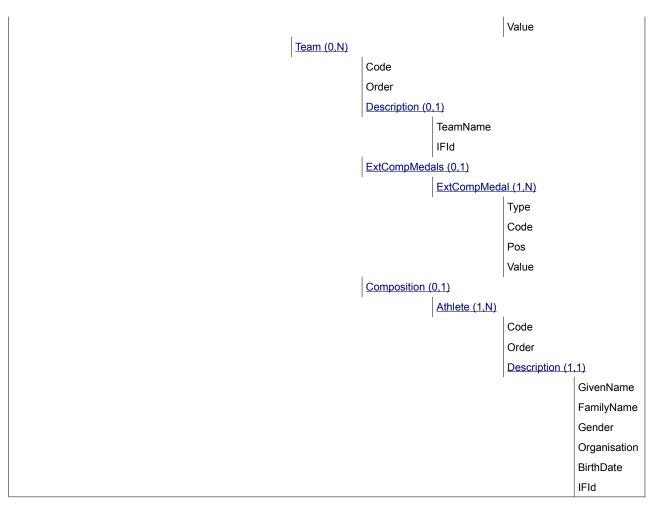

2.3.8.5 Message Values

Element: Competition (0,1)						
Attribute	M/O	Value	Description			
Gen	0	S(20)	Version of the General Data Dictionary applicable to the message			
Sport	0	S(20)	Version of the Sport Data Dictionary applicable to the message			
Codes	0	S(20)	Version of the Codes applicable to the message			

Element: Competition /ExtendedInfos /SportDescription (0,1)						
Attribute	M/O	Value	Description			
DisciplineName	М	S(40)	Discipline ENG Description (not code) from Common Codes			
EventName	М	S(40)	Event ENG Description (not code) from Common Codes.			
Gender	М	CC @SportGender	Gender code for the event unit.			



Element: Competition /ExtendedInfos /VenueDescription (0,1)					
Attribute M/O Value Description					
Venue	М	CC @VenueCode	Venue Code		
VenueName	М	S(25)	Venue ENG Description (not code) from Common Codes		

Element: Competition /Medal (1,N)						
Attribute	M/O	Value	Description			
Code	М	SC @MedalType	Medal type. All the Competitors with the same CC@MedalType are not grouped in the same element.			
Unit	М	CC @Unit	Full RSC Unit code in which a medal was awarded.			
Date	M	Date	The date of the most recent unit in which a medal was determined for this event, in this case the date of the gold medal unit. It is the date of the unit, not the date of the awarding of the medal or the date of a later change in the medallists (that is it will not change [except in the case of a re-run], even if the medallists do)			

Element: Competition /Medal /Competitor (1,1)					
Attribute	M/O	Value	Description		
Code	M	S(20) with no leading zeroes	Competitor's ID For Competitor @Type=T, it will be: Team's ID for Team event, or, Couple's ID for Pairs and Ice Dance events. Otherwise, Athlete's ID (for Competitor @Type=A).		
Туре	М	S(1)	A for athlete, T for team		
Order	М	Numeric	Competitor order (Send 1 by default). In the case of tie the order is defined for the sport rules.		
Organisation	М	CC @Organisation	Competitors' organisation		

Element: Competition /Medal /Competitor /Description (0,1)						
(for team and couples events)						
Attribute	M/O	Value	Description			
TeamName	М	S(73)	Name of the Team (team and couples)			
IFId	0	S(16)	International Federation ID. Only applies for couples			

Element: Competition /Medal /Competitor /Composition /Athlete (0,N)						
(Include all members that won the medal according to sport rules if Competitor @Type="T")						
Attribute	M/O	Value	Description			
Code	М	S(20) with no leading zeroes	Athlete's ID, corresponding either to a team member or an individual athlete			
Order	М	Numeric	Order of the team members in a team if Competitor @Type="T". 1 if Competitor @Type="A".			



Element: Competition /Medal /Competitor /Composition /Athlete /Description (1,1)							
Attribute	M/O	Value	Description				
GivenName	0	S(25)	Given name in WNPA format (mixed case)				
FamilyName	М	S(25)	Family name in WNPA format (mixed case)				
Gender	М	CC @PersonGender	Gender of the athlete				
Organisation	М	CC @Organisation	Athletes' organisation				
BirthDate	0	Date	Birth date (example: YYYY-MM-DD). Must include if the data is available				
IFId	0	S(16)	International Federation ID				

Elem	Element: Competition /Medal /Competitor /Composition /Athlete /ExtAthMedals /ExtAthMedal (1,N)						
	Туре	Code	Pos	Description			
EAM		DISCIP	N/A	Element Expected: Team Event only			
	Attribute	M/O	Value	Description			
	Value	М	SC @TeamDiscipline	Category where the team member participated in the team event (i.e.: Women, Men)			

Element: Competition /Medal /Competitor /Composition /Team (0,N)						
Only applicable for Team Event						
Attribute	M/O	Value	Description			
Code	M	S(20) with no leading zeroes	Couple's ID for Pairs and Ice Dance events.			
Order	M	Numeric 0	Value is 1, 2 for each team in the team.			

Element: Competition /Medal /Competitor /Composition /Team /Description (0,1)						
Attribute	M/O	Value	Description			
TeamName	M	S(73)	Name of the couple			
IFId	0	S(16)	International Federation ID of the couple			

Eleme	Element: Competition /Medal /Competitor /Composition /Team /ExtCompMedals /ExtCompMedal (1,N)						
	Type	Code	Description				
ECM		DISCIP	N/A	Element Expected: Team Event only			
	Attribute	M/O	Value	Description			
	Value	М	SC @TeamDiscipline	Category where the team participated in the team event (i.e.: Pairs, Ice Dance)			

Element: Competition /Medal /Competitor /Composition /Team /Composition /Athlete (1,N)							
Attribute	M/O		Va	lue		Description	
Code	М	S(20)	with	no	leading	Athlete ID	

Olympic Data Feed - © IOC

Event's Medallists



		zeroes	
Order	М	Numeric #0	Order attribute used to sort team members

Element: Competition /Medal /Competitor /Composition /Team /Composition /Athlete /Description (1,1)							
Attribute	M/O	Value	Description				
GivenName	0	S(25)	Given name in WNPA format (mixed case)				
FamilyName	М	S(25)	Family name in WNPA format (mixed case)				
Gender	М	CC @PersonGender	Gender of the athlete				
Organisation	М	CC @Organisation	Athletes' organisation				
BirthDate	0	Date	Birth date (example: YYYY-MM-DD). Must include if the data is available				
IFId	0	S(16)	International Federation ID				

2.3.8.6 Message Sort

The message is sorted according to the medal type. Moreover, in case of tie the order is according to the Competitor@Order (given by the sport rule). Team members are sorted according to the Athlete@Order.



2.3.9 Medallists by discipline

2.3.9.1 Description

The Medallists by discipline is a message containing the list of medallists for one discipline, up to the moment the message is generated.

The Medallists by discipline message is a complete message that increments its content as more medals are being awarded during the competition. The arrival of this message resets the entire previous Medallists by discipline information.

2.3.9.2 Header Values

The following table describes the message header attributes.

Attribute	Value	Comment		
CompetitionCode	CC @Competition	Unique ID for competition		
DocumentCode	CC @Discipline	Full RSC of the Discipline		
DocumentType	DT_MEDALLISTS_DISCIPLIN E	Medallists by discipline		
Version	1V	Version number associated to the message's content. Ascending number		
FeedFlag	"P"-Production "T"-Test	Test message or production message.		
Date	Date	Date when the message is generated, expressed in the local time zone where the message was produced.		
Time	Time	Time up to milliseconds when the message is generated, expressed in the local time zone where the message was produced.		
LogicalDate	Date	Logical Date of events. This is the same as the physical day exce when the unit or message transmission extends after midnight. See full explanation in ODF Foundation.		
Source	SC @Source	Code indicating the system which generated the message.		

2.3.9.3 Trigger and Frequency

Medallists by Discipline message is sent as soon as one new medal is officially known (but not necessarily awarded) for any of the events that are part of the competition schedule. As the competition progresses, successive changes in the medallists by discipline information are made.

Trigger also after any change.

2.3.9.4 Message Structure


The following table defines the structure of the message.

Level 1	Level 2	Level 3	Level 4	Level 5	Level 6	Level 7	Level 8	Level 9	Level 10	Level 11
Competitio	n (0,1)		•	•					•	
	Gen									
	Sport									
	Codes									



```
ExtendedInfos (0,1)
           SportDescription (0,1)
                       DisciplineName
Discipline (1,1)
           Code
           TotalEvents
           FinishedEvents
           Event (1,N)
                       Code
                       EventName
                       Date
                       Medal (1,N)
                                  Code
                                  Competitor (1,1)
                                              Code
                                              Type
                                              Order
                                              Organisation
                                              Description (0,1)
                                                          TeamName
                                                          IFId
                                              Composition (1,1)
                                                          Athlete (0,N)
                                                                     Code
                                                                     Order
                                                                     Description (1,1)
                                                                                 GivenName
                                                                                 FamilyName
                                                                                 Gender
                                                                                 Organisation
                                                                                 BirthDate
                                                                                 IFId
                                                                     ExtAthMedals (0,1)
                                                                                 ExtAthMedal (1,N)
                                                                                             Туре
                                                                                            Code
                                                                                             Pos
                                                                                             Value
                                                          <u>Team (0,N)</u>
```



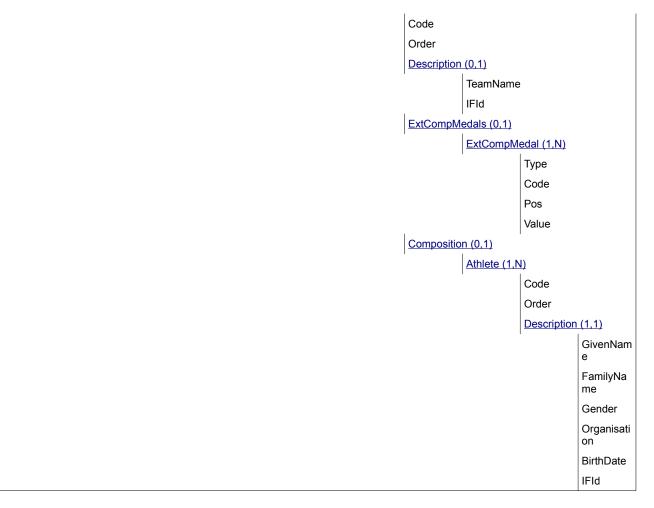

2.3.9.5 Message Values

Element: Competition (0,1)							
Attribute	M/O	Value	Description				
Gen	0	S(20)	Version of the General Data Dictionary applicable to the message				
Sport	0	S(20)	Version of the Sport Data Dictionary applicable to the message				
Codes	0	S(20)	Version of the Codes applicable to the message				

Element: Competition /ExtendedInfos /SportDescription (0,1)						
Sport Description in T	ext					
Attribute	M/O	Value	Description			
DisciplineName	M	S(40)	Discipline ENG Description (not code) from Common Codes			

Element: Competition /Discipline (1,1)

Olympic Data Feed - © IOC
Technology and Information Department

Medallists by discipline



Discipline information	Discipline information						
Attribute	M/O	Value	Description				
Code	М	CC @Discipline	Full RSC Discipline Code				
TotalEvents	М	Numeric	Total number of competition events (events that award medals)				
FinishedEvents	M	Numeric	Number of competition events that have awarded any type of medal, out of the total. In case of sports with 2 matches have medals (Bronze and Gold), this attribute only counts when the Gold medal has been awarded (not counted for Bronze because the event has not finished yet).				

Element: Competition /Discipline /Event (1,N)					
Event information					
Attribute M/O Value Description					
Code	М	CC @Event	Full RSC of the Event		
EventName	М	S(40)	Event ENG Description (not code) from Common Codes.		
Date	M YYYY-MM-DD Date of the Gold medal match.				

Element: Competition /Discipline /Event /Medal (1,N)					
Attribute	M/O	Value	Description		
Code	M	SC @MedalType	Medal type gold, silver or bronze. All the Competitors with the same CC@MedalType must not be grouped in the same element (it applies in the equalled medals)		

Element: Competition /Discipline /Event /Medal /Competitor (1,1)						
Competitor related to	Competitor related to the medals.					
Attribute M/O Value Description						
Code	M	S(20) with no leading zeroes	Competitor's ID			
Туре	М	S(1)	A for Athlete, T forTeam			
Order	M	Numeric	Competitor order (Send 1 by default) and in the case of tie the order will be defined by the IOC rules.			
Organisation	М	CC @Organisation	Competitors' organisation			

Element: Competition /Discipline /Event /Medal /Competitor /Description (0,1)				
Attribute M/O Value Description				
TeamName	M	S(73)	Name of the team. Only applies for couples / teams.	
IFId	0	S(16)	Team IF number, send if available (usually only for couples)	

Element: Competition /Discipline /Event /Medal /Competitor /Composition /Athlete (0,N)						
Attribute	M/O	Value		Description		
Code	М	S(20) with no zeroes		Individual athlete's ID (if Competitor @Type="A" or team member's ID (if Competitor @Type="T").		



Order	М	Numeric #0	Team member order for medal. Send 1 if individual medal
		#0	

Element: Competition /Discipline /Event /Medal /Competitor /Composition /Athlete /Description (1,1)				
Attribute	M/O	Value	Description	
GivenName	0	S(25)	Given name in WNPA format (mixed case)	
FamilyName	М	S(25)	Family name in WNPA format (mixed case)	
Gender	М	CC @PersonGender	Gender of the athlete	
Organisation	М	CC @Organisation	Athletes' organisation	
BirthDate	0	Date	Birth date (example: YYYY-MM-DD). Must include if the data is available	
IFId	0	S(16)	International Federation ID	

Eleme	Element: Competition /Discipline /Event /Medal /Competitor /Composition /Athlete /ExtAthMedals /ExtAthMedal (1,N)						
Туре		Code	Pos	Description			
EAM		DISCIP	N/A	Element Expected: Team Event only			
	Attribute	M/O	Value	Description			
	Value	M	SC @TeamDiscipline	Category where the team member participated in the team event (i.e.: Women, Men)			

Element: Competition /Discipline /Event /Medal /Competitor /Composition /Team (0,N)						
Only applicable in the case of team of teams						
Attribute	Attribute M/O Value Description					
Code	М	S(20) with no leading zeroes	Team's (couples) ID			
Order	М	Numeric 0	Order of the teams if multiple teams else 1			

Element: Competition /Discipline /Event /Medal /Competitor /Composition /Team /Description (0,1)				
Attribute M/O Value Description				
TeamName	М	S(73)	Name of the team. Only applies for teams	
IFId	0	S(16)	Team IF number, send if available (only pair/ice dance)	

Elem	Element: Competition /Discipline /Event /Medal /Competitor /Composition /Team /ExtCompMedals /ExtCompMedal (1,N)							
	Description							
ECM		DISCIP	N/A	Element Expected: Team Event only				
	Attribute	M/O	Value	Description				
	Value	М	SC @TeamDiscipline	Category where the team participated in the team event (i.e.: Pairs, Ice Dance)				

Element: Competition /Discipline /Event /Medal /Competitor /Composition /Team /Composition /Athlete (1,N)

Olympic Data Feed - © IOC
Technology and Information Department



Attribute	M/O	Value	Description
Code	М	S(20) with no leading zeroes	Athlete's ID of the listed team's member. Therefore, he/she is part of the team.
Order	М	Numeric	Team member order

Element: Competitio	Element: Competition /Discipline /Event /Medal /Competitor /Composition /Team /Composition /Athlete /Description (1,1)						
Attribute	M/O	Value	Description				
GivenName	0	S(25)	Given name in WNPA format (mixed case)				
FamilyName	М	S(25)	Family name in WNPA format (mixed case)				
Gender	М	CC @PersonGender	Gender of the athlete				
Organisation	М	CC @Organisation	Athletes' organisation				
BirthDate	0	Date	Birth date (example: YYYY-MM-DD). Must include if the data is available				
IFId	0	S(16)	International Federation ID				

2.3.9.6 Message Sort

Events in the message will be sorted by the chronological order in which the events took place, (the time is considered to be the time of the gold medal) unit followed by medal order (gold, silver, bronze) and then by the official result order.



2.3.10 Configuration

2.3.10.1 Description

The Configuration is a message containing general configuration.

2.3.10.2 Header Values

The following table describes the message header attributes.

Attribute	Value	Comment
CompetitionCode	CC @Competition	Unique ID for competition
DocumentCode	CC @Unit CC @Phase	Full RSC of the unit, one message is sent for each event unit for all events, additionally one message is sent per phase (phase level) in the team event.
DocumentType	DT_CONFIG	Configuration message
Version	1V	Version number associated to the message's content. Ascending number
FeedFlag	"P"-Production "T"-Test	Test message or production message.
Date	Date	Date when the message is generated, expressed in the local time zone where the message was produced.
Time	Time	Time up to milliseconds when the message is generated, expressed in the local time zone where the message was produced.
LogicalDate	Date	Logical Date of events. This is the same as the physical day except when the unit or message transmission extends after midnight. See full explanation in ODF Foundation.
Source	SC @Source	Code indicating the system which generated the message.

2.3.10.3 Trigger and Frequency

The message is sent prior to any ODF Sports message.

Trigger after any major change, but considering that, if possible, the configuration must be provided before the start list or an impacted unit. If a DT_CONFIG message is sent after a DT_RESULT in a related unit then the next version of DT_RESULT must be sent immediately.

2.3.10.4 Message Structure

The following table defines the structure of the message.

Level 1	Level 2	Level 3	Level 4	Level 5
Competition (0,1)	•	•		
	Gen			
	Sport			
	Codes			
	Configs (1,1)			
	1	Config (1,N)		



Unit	
ExtendedConfig (1,N)	
	Туре
	Code
	Pos
	Value

2.3.10.5 Message Values

Element: Competition	(0,1)						
Attribute	M/O	Value	Description				
Gen	0	S(20)	Version of the General Data Dictionary applicable to the message				
Sport	0	S(20)	Version of the Sport Data Dictionary applicable to the message				
Codes	0	S(20)	Version of the Codes applicable to the message				

Element: Competition	/Configs /Con	fig (1,N)	
Attribute	M/O	Value	Description
Unit	M	CC @Unit CC @Phase	Full RSC of the Unit. Can be at event unit level (for all events, unit message) or at phase level (for the team event, overall message).

Elem	ent: Competition /Configs	/Config /ExtendedConfig	j (1,N)	
	Туре	Code	Pos	Description
QUAL	IFICATION	FROM_RANK	N/A	Element Expected: Send (except Final) if this rule applies to the competition including phase message in teams.
	Attribute	M/O	Value	Description
	Value	М	Numeric #0	Send the qualifying rank to indicate first rank to qualify
QUAL	IFICATION	TO_RANK	N/A	Element Expected: Send (except Final) if this rule applies to the competition including phase message in teams.
	Attribute	M/O	Value	Description
	Value	М	Numeric #0	Send the qualifying rank to indicate last rank to qualify
QUAL	IFICATION	QUAL_RULE	N/A	Element Expected: When applicable including phase message in teams.
	Attribute	M/O	Value	Description
	Value	M	SC @QualRule	Send the code for the qualification rule.
EC		JUDGES	N/A	Element Expected: Always



	Attribute	M/O	Value	Description			
	Value	М	Numeric #0	Send the number of judges and referee in this unit			
EC		TEAM_ORDER	Numeric #0	Pos Description: Send the order (1-4) for order on the subunits in the team event Element Expected: Always in the team overall (for each phase)			
	Attribute	M/O	Value	Description			
	Value	М	CC @Unit	Send the Full RSC of the subunit			
STAR	TLIST	WARMUP RESURFACING GROUP	Numeric #0	Pos Description: Send the order of this code over all different codes. Element Expected: For each unit This extension provides information about the timing of the warm-up, each group and ice resurfacing.			
	Attribute	M/O	Value	Description			
	Value	M	Numeric #0	Send the order considering all references of this code value (1,2, WARMUP for example)			
	Sub Element: Competition Expected When available	on /Configs /Config /Exter e	ndedConfig /ExtendedCo	nfigItem			
	Attribute	Value	Description				
	Code	START					
	Pos	N/A					
	Value	hh:mm:ss	Send the start time for this	s activity			
	Sub Element: Competition Expected When available	on /Configs /Config /Exter e	ndedConfig /ExtendedCo	nfigItem			
	Attribute	Value	Description				
	Code	END					
	Pos	N/A					
	Value	hh:mm:ss	Send the end time for this	activity			

Sample (Singles Qualification unit)



```
<Configs>
  <Config Unit="FSKMSINGLES--
                                      --QUAL000100--">
   <ExtendedConfig Type="QUALIFICATION" Code="FROM_RANK" Value="1" />
<ExtendedConfig Type="QUALIFICATION" Code="TO_RANK" Value="20" />
   <ExtendedConfig Type="EC" Code="JUDGES" Value="9" />
<ExtendedConfig Type="STARTLIST" Code="WARMUP" Pos="1" Value="1">
      <ExtendedConfigItem Code="START" Value="15:30:00"/>
      <ExtendedConfigItem Code="END" Value="15:40:00"/>
   </ExtendedConfig >
   <ExtendedConfig Type="STARTLIST" Code="GROUP" Pos="2" Value="1">
      <ExtendedConfigItem Code="START" Value="15:40:00"/>
      <ExtendedConfigItem Code="END" Value="16:10:00"/>
   </ExtendedConfig >
   <ExtendedConfig Type="STARTLIST" Code="WARMUP" Pos="3" Value="2">
      <ExtendedConfigItem Code="START" Value="16:10:00"/>
      <ExtendedConfigItem Code="END" Value="16:20:00"/>
   </ExtendedConfig >
   <ExtendedConfig Type="STARTLIST" Code="GROUP" Pos="4" Value="2">
      <ExtendedConfigItem Code="START" Value="16:20:00"/>
     <ExtendedConfigItem Code="END" Value="16:50:00"/>
   </ExtendedConfig >
   <ExtendedConfig Type="STARTLIST" Code="RESURFACING" Pos="5" Value="1">
     <ExtendedConfigItem Code="START" Value="16:50:00"/>
     <ExtendedConfigItem Code="END" Value="17:10:00"/>
 </ExtendedConfig >
```

Sample (Team event Final unit)

```
<Configs>
  <Config Unit="FSKXTEAM-----
                               -----FNL-0003PR--">
   <ExtendedConfig Type="EC" Code="JUDGES" Value="9" />
   <ExtendedConfig Type="STARTLIST" Code="WARMUP" Pos="1" Value="1">
     <ExtendedConfigItem Code="START" Value="19:00:00"/>
<ExtendedConfigItem Code="END" Value="19:06:00"/>
   </ExtendedConfig >
   <ExtendedConfig Type="STARTLIST" Code="GROUP" Pos="2" Value="1">
     <ExtendedConfigItem Code="START" Value="19:06:00"/>
     <ExtendedConfigItem Code="END" Value="19:33:00"/>
   </ExtendedConfig >
   <ExtendedConfig Type="STARTLIST" Code="WARMUP" Pos="3" Value="2">
     <ExtendedConfigItem Code="START" Value="19:33:00"/>
     <ExtendedConfigItem Code="END" Value="19:39:00"/>
   </ExtendedConfig >
   <ExtendedConfig Type="STARTLIST" Code="GROUP" Pos="4" Value="2">
     <ExtendedConfigItem Code="START" Value="19:40:00"/>
     <ExtendedConfigItem Code="END" Value="20:07:00"/>
   </ExtendedConfig >
   <ExtendedConfig Type="STARTLIST" Code="RESURFACING" Pos="5" Value="1">
     <ExtendedConfigItem Code="START" Value="20:07:00"/>
     <ExtendedConfigItem Code="END" Value="20:17:00"/>
   </ExtendedConfig >
```

Sample (Team event - qualification)



```
<Configs>
  <Config Unit="FSKXTEAM-------QUAL------">
    <ExtendedConfig Type="EC" Code="TEAM_ORDER" Pos="1" Value="FSKXTEAM-------QUAL0001MN--" />
    <ExtendedConfig Type="EC" Code="TEAM_ORDER" Pos="2" Value="FSKXTEAM-------QUAL0003PR--" />
    <ExtendedConfig Type="EC" Code="TEAM_ORDER" Pos="3" Value="FSKXTEAM-------QUAL0004DC--" />
    <ExtendedConfig Type="EC" Code="TEAM_ORDER" Pos="4" Value="FSKXTEAM------QUAL0002LD--" />
    </Config>
```

2.3.10.6 Message Sort

There is no general message sorting rule.





3 Message Timeline

3.1 Preparation Phase

Trigger	Message	Status	D	Ε	P	s	U
As soon as ODF operations start	DT_CODES		х	0	o		0
Periodically as soon as ODF operations start	DT_PARTIC		x				
	DT_PARTIC_TEAMS		х				
	DT_PARTIC_NAME		х				
	DT_SCHEDULE		х				0

3.2 Before competition

Trigger	Message	Status	D	E	P	s	U
After Initial Download - any changes of athlete data	DT_PARTIC_UPDATE		x				
After Initial Download - any changes of team data	DT_PARTIC_TEAMS_UPDATE		x				
After any competition schedule change	DT_SCHEDULE_UPDATE		x				o
	DT_PDF C24 Season Best			х			
After Team Confirmation - any changes of athlete data	DT_PARTIC_UPDATE		x				
After Team Confirmation - any changes of team data	DT_PARTIC_TEAMS_UPDATE		x				
	DT_PDF C30 Number of entries by NOC		х				
	DT_PDF C32E Entry List by Event (Team)			x			
	DT_PDF C32E Entry List by Event			х			
	DT_CONFIG (for Team Event)				x		х
	DT_CONFIG (for Individuals and Couples)						х
Start List is known	DT_RESULT	START_LIST					х
	DT_CUMULATIVE_RESULT	START_LIST		х			
	DT_PDF C51A (Short Program)						х
	DT_PDF C51D (Rhythm Dance)						х
After Judges Draw	DT_RESULT	START_LIST					х
	DT_CUMULATIVE_RESULT	START_LIST		х			
	DT_PDF C57 ISU Panel of Judges and Technical Panel						х
	DT_PDF C51H Planned Program Content						х



3.3 During competition

Trigger	Message	Status	D	Ε	Р	s	U
First Warmup Group On Ice	DT_SCHEDULE_UPDATE	GETTING_READY	х				0
	DT_CURRENT						х
(for final segment in individual events)	DT_CUMULATIVE_RESULT	INTERMEDIATE		х			
First Skater of a warmup group starts	DT_SCHEDULE_UPDATE	RUNNING	x				0
During performance after every 5 seconds	DT_CURRENT						x
Scores are ready	DT_CURRENT						х
(if not last skater of a warmup group)	DT_RESULT	LIVE					x
(last skater of a warmup group)	DT_RESULT	INTERMEDIATE					х
	DT_CUMULATIVE_RESULT	INTERMEDIATE		х			0
Start of Ice Resurfacing	DT_SCHEDULE_UPDATE	SCHEDULED_BREAK	х				o
	DT_CURRENT						х
Start of Warmup Group (when there was no ice Resurfacing before)	DT_SCHEDULE_UPDATE	SCHEDULED_BREAK	x				О
	DT_CURRENT						х

3.4 After competition

Trigger	Message	Status	D	Ε	Р	S	U
Segment - Last score/result	DT_SCHEDULE_UPDATE	FINISHED	х				0
	DT_RESULT	UNOFFICIAL					х
	DT_CURRENT						х
(for the first unit in individual events)	DT_CUMULATIVE_RESULT	INTERMEDIATE		х			
(for the last unit in individual events)	DT_CUMULATIVE_RESULT	UNOFFICIAL		х			
At the end of Segment - Score Confirmed	DT_RESULT	OFFICIAL					х
	DT_PDF C73A1 Segment Results						х
	DT_PDF C77A Results Details						х
	DT_PDF C77B Judges Details per Skater						х
If new season best	DT_PDF C81 New Season Best			х			
Final Segment - Scores/Results confirmed	DT_RESULT	OFFICIAL					х
	DT_CUMULATIVE_RESULT	OFFICIAL		х			
	DT_RANKING	OFFICIAL		х			
	DT_MEDALS		х				
	DT_MEDALLISTS	OFFICIAL		х			



DT_MEDALLISTS_DISCIPLINE	х			
DT_PDF C73B Results		x		
DT_PDF C92A Medallist		х		
DT_PDF C93 Medallists by Event	х			
DT_PDF C95 Medal Standings	х			
DT_PDF C97 Figure Skating Medal Standings	x			

Legend: **D** Discipline; **E** Event; **P** Phase; **S** Session; **U** Unit **x** Sent on that level; **o** Includes info from that level



4 Document Control

	Version history				
Version	Date	Comments			
V0.1	10 Dec 2019	First version			
V0.2	13 Mar 2020	Updated after review			
V1.0	9 Apr 2020	DT_PARTIC_TEAM: Add Team/ShortName and Team/TeamType [CR19497]			
V1.1	1 Jul 2020	Updated			
V1.2	4 Aug 2020	Updated			
V1.3	14 Aug 2020	Updated to APP			
V1.4	9 Oct 2020	Updated			
V1.5	11 Dec 2020	Updated with CR021113			
V1.6	9 Aug 2021	Updated after Homologation			

File Reference: WOG-2022-FSK-1.6 APP

	Change Log						
Version	Status	Changes on version					
V0.1	SFR	First version					
V0.2	SFR	Applicable Messages: Remove DT_PRESSPHOTOFINISH_LK Applicable Messages: Add DT_PIC Applicable Messages: Add note about message responsibilities DT_CONFIG: Update Value for START and END at STARTLIST/xx @Configs /Config /ExtendedConfig to include seconds DT_CUMULATIVE_RESULT: Duplicate of Result /ResultItems /ResultItem removed DT_RESULT: Add ER/ELEMENT/FACTOR_FLAG @Result /ExtendedResults /ExtendedResult DT_CURRENT: Add ER/ELEMENT/FACTOR_FLAG @Result /ExtendedResults /ExtendedResult DT_RESULT: Update Value/Value2 at ER/COMPONENT @Result /ExtendedResults /ExtendedResult sc Factored is Value DT_CURRENT: Update Value/Value2 at ER/COMPONENT @Result /ExtendedResults /ExtendedResult sc Factored is Value DT_RESULT: Update Value size to S(100) at ER/ELEMENT/ELEMENT_DESC @Result /ExtendedResults /ExtendedResult DT_RESULT: Update Value size to S(100) at EUE/ELEMENT_DESC @Result /Competitor /EventUnitEntry DT_RESULT: Update Value size to S(100) at EUE/ELEMENT_DESC @Result /Competitor /Compositior /Athlete /EventUnitEntry DT_CURRENT: Update Value size to S(30) at ER/ELEMENT/ELEMENT_DESC @Result /ExtendedResults /ExtendedResult DT_RESULT: Update Value size to S(30) at ER/ELEMENT/ELEMENT_CODE @Result /ExtendedResults /ExtendedResult DT_RESULT: Update Value size to S(30) at EUE/ELEMENT_CODE @Result /Competitor /Compositor /Athlete /EventUnitEntry DT_RESULT: Update Value size to S(30) at EUE/ELEMENT_CODE @Result /Competitor /Compositor /Athlete /EventUnitEntry DT_RESULT: Update Value size to S(30) at EUE/ELEMENT_CODE @Result /Competitor /Compositor /Athlete /EventUnitEntry DT_RESULT: Update Value size to S(30) at ER/ELEMENT/ELEMENT_CODE @Result /ExtendedResult DT_CURRENT: Update Value Size to S(30) at ER/ELEMENT/ELEMENT_CODE @Result /Competitor /Compositor /Athlete /EventUnitEntry DT_CURRENT: Update EUE/MUSIC to S(80) @Result /Competitor /EventUnitEntry and Result /ExtendedResult DT_CURRENT: Update description at CURRENT/JUDGES_SCORES_SEND @ExtendedInfo DT_CURRENT: Update description at CURRENT/JUDGES_SCORES_SEND @ExtendedInfo					



		DT_CUMULATIVE_RESULT: Update trigger for second unit in individuals and couples Other minor typographical corrections Message List: Clarification about non-OVR messages DT_COURDLIFE in Message added.
		DT_SCHEDULE: Message added DT_PARTIC: Add @Pos for ENTRY/WLD_RANK @ Participant /Discipline /RegisteredEvent /EventEntry DT_PARTIC_TEAMS: Add @Pos for ENTRY/WLD_RANK @ Team /Discipline /RegisteredEvent /EventEntry DT_PARTIC_TEAMS: Clarify expected @Team /Discipline /RegisteredEvent /EventEntry DT_RESULT: Remove all references to UNCONFIRMED Remove references to historic athletes/team throughout.
		DT_RESULT: Change ER/COMPONENT @Pos to SC @Component @Result /ExtendedResults /ExtendedResult
		DT_CURRENT: Change ER/COMPONENT @Pos to SC @Component @Result /ExtendedResults /ExtendedResult
		DT_RESULT: Change Officials/Official/Order to Mandatory DT_RESULT: Remove ER/COMPONENT/COMPONENT_DESC @Result /ExtendedResults /ExtendedResult
		DT_CURRENT: Remove ER/COMPONENT/COMPONENT_DESC @Result /ExtendedResults /ExtendedResult
		DT_CURRENT: Update message description DT_CUMULATIVE_RESULT: Add ResultStatus START_LIST and include in triggering. DT_CUMULATIVE_RESULT: Change Result /ResultItems /ResultItem /Result /ResultType to Mandatory DT_CUMULATIVE_RESULT: Add note re when to include at Result /ResultItems /ResultItem DT_RANKING: Remove ResultStatus PARTIAL and update triggering. DT_CONFIG: Update Description at STARTLIST @ Configs /Config /ExtendedConfig DT_MEDALLISTS_DISCIPLINE: Update to same structure as DT_MEDALLISTS for uniformity Other typographical corrections as needed
V1.0	SFA	DT_RESULT: Clarify ExtendedInfos /UnitDateTime /StartDate DT_PARTIC_TEAM: Add Team/ShortName and Team/TeamType [CR19497]
V1.1	SFA	DT_CUMULATIVE_RESULT: Update triggering Update Value of ELEMENT_CODE to SC @Event throughout to use list of codes. Value sent is unchanged but allows translation. Editorial improvements
V1.2	SFA	DT_CURRENT: Update DISPLAY/CURRENT/TO_BEAT at ExtendedInfos /ExtendedInfo Add Overview at 2.1
V1.3	APP	DT_CURRENT: Update DISPLAY/CURRENT/TO_BEAT at ExtendedInfos /ExtendedInfo
V1.4	APP	DT_CURRENT: Update triggering to match ODF requirements as already documented and current OVR implementation Timeline: Added
V1.5	APP	DT_PARTIC: Update ENTRY/PB at Participant /Discipline /RegisteredEvent /EventEntry DT_PARTIC: Update ENTRY/RANK_WLD at Participant /Discipline /RegisteredEvent /EventEntry DT_PARTIC_TEAMS: Update ENTRY/RANK_WLD at Team /Discipline /RegisteredEvent /EventEntry DT_PARTIC_TEAMS: Update ENTRY/PB at Participant /Discipline /RegisteredEvent /EventEntry DT_RESULT: Clarify Description for ER/DEDUCTION Value at Result /ExtendedResults /ExtendedResult DT_RESULT: Correct typographical error in the sample at Result /ExtendedResults /ExtendedResult DT_RESULT: Change Value2 to O at ER/COMPONENT at Result /ExtendedResults /ExtendedResult DT_CUMULATIVE_RESULT: Update Description of ResultPoints at Result /ResultItems /ResultItem /Result in case of overall IRM DT_CURRENT: Update expected for DISPLAY/CURRENT/TO_BEAT @ExtendedInfos /ExtendedInfo DT_CURRENT: Change Value2 to O at ER/COMPONENT at Result /ExtendedResults /ExtendedResult DT_CURRENT: Correct typographical error in the sample at Result /ExtendedResults /ExtendedResult DT_CURRENT: Clarify Description for ER/DEDUCTION Value at Result /ExtendedResults /ExtendedResult DT_RANKING: Corrected typo at Result/Result Value. Does not change the data sent.
V1.6	APP	DT_CONFIG: Update all QUALIFICATION extensions at Configs /Config /ExtendedConfig [HPQC194969]
		•