



# Olympic Data Feed



## Ice Hockey ODF Data Dictionary

Technology and Information Department  
© International Olympic Committee

WOG-2022-IHO-1.2 APP  
30 November 2021



## License

The document accompanying this license and the information contained therein (the Document), whether in a paper or electronic format, is made available to you subject to the terms stated below. By using and/or copying all or part of the Document, you (the licensee) agree that you will comply with the following terms and conditions.

1. You may, on a non-exclusive basis, use the Document only on the condition that you abide by the terms of this license. Subject to this condition and other terms and restrictions contained herein, the Document and the information contained therein may be used (i) to further develop the standards described in the Document for use in relation with the Olympic and Paralympic Games and/or (ii) to develop similar standards for other events than the Olympic and Paralympic Games (both (i) and (ii) are hereinafter designated as the Permitted Use, and works further developing these standards for the Olympic and Paralympic Games or developing similar standards for other events are hereinafter referred to as Derivative Works), and copies of the Document or of Derivative Works may be made and distributed for the purpose of the Permitted Use, PROVIDED THAT the COPYRIGHT and references to the IOC appearing in the Document and the TERMS OF THIS LICENSE are included on ALL such COPIES, and further PROVIDED THAT you do not charge any fee or any other monetary compensation for the distribution of the Document to others. The copyright and other intellectual property rights in the Document remain vested in the IOC and the IOC remains entitled to assert his copyright or other intellectual property rights in the Document against any person or entity who does not comply with the terms of this License.
2. A copy of any Derivative Work shall be provided to the IOC free of charge. Moreover, the IOC is granted a worldwide, perpetual, unrestricted, royalty-free non-exclusive license to use any Derivative Work for the further development of the standards made by or for the IOC in relation to the Olympic and Paralympic Games (these standards and the documents describing them are hereinafter referred to as Further Standards) and to make or have made all kinds of exploitation of the Further Standards, with the right to grant sub-licenses.
3. Except if reproduced in the Document, the use of the name and trademarks of the IOC is strictly prohibited, including, without limitation, for advertising, publicity, or in relation to products or services and their names. Any use of the name or trademarks of the IOC, whether registered or not, shall require the specific written prior permission of the IOC.
4. NO WARRANTY, EXPRESSED OR IMPLIED, IS MADE REGARDING THE ACCURACY, ADEQUACY, COMPLETENESS, RELIABILITY OR USEFULNESS OF ANY INFORMATION CONTAINED IN THE DOCUMENT. The Document and the information contained herein are provided on an "as is" basis. THE IOC DISCLAIMS ALL WARRANTIES OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY WARRANTY OF NON-INFRINGEMENT OF PROPRIETARY RIGHTS, MERCHANTABILITY, OR FITNESS FOR A PARTICULAR PURPOSE. IN NO EVENT SHALL THE IOC BE LIABLE TO ANYONE FOR DAMAGES OF ANY KIND ARISING FROM OR RELATING TO YOUR ACQUISITION, USE, DUPLICATION, DISTRIBUTION, OR EXPLOITATION OF THE DOCUMENT OR ANY PORTION THEREOF, INCLUDING BUT NOT LIMITED TO, COMPENSATORY DAMAGES, LOST PROFITS, LOST DATA OR ANY FORM OF SPECIAL, INCIDENTAL, DIRECT, INDIRECT, CONSEQUENTIAL OR PUNITIVE DAMAGES, WHETHER BASED ON BREACH OF CONTRACT OR WARRANTY, TORT OR OTHERWISE. THE IOC FURTHER DISCLAIMS ANY LIABILITY FOR ANY DAMAGE CAUSED WHEN THE DOCUMENT IS USED IN A DERIVATIVE WORK. The IOC further disclaims any liability regarding the existence or inexistence of any intellectual property or other rights that might be claimed by third parties with respect to the implementation or use of the technology or information described in the Document.

The same conditions as those described in this Section shall apply mutatis mutandis to the license granted to the IOC on the Derivative Works in Section 2 above.

5. This License is perpetual subject to your conformance to its terms and conditions. The IOC may terminate this License immediately upon your breach of any of its terms and, upon such termination you will cease all use, duplication, distribution, and/or exploitation in any manner of the Document.
6. This License is governed by the laws of Switzerland. You agree that any disputes arising from or relating to this License will be resolved in the courts of Lausanne, Switzerland.

IF YOU DO NOT AGREE TO THESE TERMS YOU MUST CEASE ALL USE OF THE DOCUMENT NOW.



## Table of Contents

1 Introduction.....	6
1.1 This document.....	6
1.2 Objective.....	6
1.3 Main Audience.....	6
1.4 Glossary.....	6
1.5 Related Documents.....	6
2 Messages.....	7
2.1 Ice Hockey Overview.....	7
2.2 Applicable Messages.....	7
2.3 Messages.....	9
2.3.1 Competition schedule / Competition schedule update.....	9
2.3.1.1 Description.....	9
2.3.1.2 Header Values.....	10
2.3.1.3 Trigger and Frequency.....	11
2.3.1.4 Message Structure.....	11
2.3.1.5 Message Values.....	13
2.3.1.6 Message Sort.....	17
2.3.2 List of participants by discipline / List of participants by discipline update.....	18
2.3.2.1 Description.....	18
2.3.2.2 Header Values.....	18
2.3.2.3 Trigger and Frequency.....	19
2.3.2.4 Message Structure.....	19
2.3.2.5 Message Values.....	20
2.3.2.6 Message Sort.....	24
2.3.3 List of teams / List of teams update.....	25
2.3.3.1 Description.....	25
2.3.3.2 Header Values.....	25
2.3.3.3 Trigger and Frequency.....	25
2.3.3.4 Message Structure.....	25
2.3.3.5 Message Values.....	26
2.3.3.6 Message Sort.....	29
2.3.4 Event Unit Start List and Results.....	30
2.3.4.1 Description.....	30
2.3.4.2 Header Values.....	30
2.3.4.3 Trigger and Frequency.....	30
2.3.4.4 Message Structure.....	31
2.3.4.5 Message Values.....	34
2.3.4.6 Message Sort.....	48
2.3.5 Current Information.....	49
2.3.5.1 Description.....	49
2.3.5.2 Header Values.....	49
2.3.5.3 Trigger and Frequency.....	49
2.3.5.4 Message Structure.....	49
2.3.5.5 Message Values.....	50
2.3.5.6 Message Sort.....	51
2.3.6 Play by Play.....	52



2.3.6.1 Description.....	<a href="#">52</a>
2.3.6.2 Header Values.....	<a href="#">52</a>
2.3.6.3 Trigger and Frequency.....	<a href="#">52</a>
2.3.6.4 Message Structure.....	<a href="#">53</a>
2.3.6.5 Message Values.....	<a href="#">54</a>
2.3.6.6 Message Sort.....	<a href="#">59</a>
2.3.7 Image.....	<a href="#">60</a>
2.3.7.1 Description.....	<a href="#">60</a>
2.3.7.2 Header Values.....	<a href="#">60</a>
2.3.7.3 Trigger and Frequency.....	<a href="#">60</a>
2.3.7.4 Message Structure.....	<a href="#">60</a>
2.3.7.5 Message Values.....	<a href="#">61</a>
2.3.7.6 Message Sort.....	<a href="#">61</a>
2.3.8 Pool Standings.....	<a href="#">63</a>
2.3.8.1 Description.....	<a href="#">63</a>
2.3.8.2 Header Values.....	<a href="#">63</a>
2.3.8.3 Trigger and Frequency.....	<a href="#">63</a>
2.3.8.4 Message Structure.....	<a href="#">63</a>
2.3.8.5 Message Values.....	<a href="#">65</a>
2.3.8.6 Message Sort.....	<a href="#">68</a>
2.3.9 Brackets.....	<a href="#">69</a>
2.3.9.1 Description.....	<a href="#">69</a>
2.3.9.2 Header Values.....	<a href="#">69</a>
2.3.9.3 Trigger and Frequency.....	<a href="#">69</a>
2.3.9.4 Message Structure.....	<a href="#">69</a>
2.3.9.5 Message Values.....	<a href="#">71</a>
2.3.9.6 Message Sort.....	<a href="#">73</a>
2.3.10 Statistics.....	<a href="#">74</a>
2.3.10.1 Description.....	<a href="#">74</a>
2.3.10.2 Header Values.....	<a href="#">74</a>
2.3.10.3 Trigger and Frequency.....	<a href="#">74</a>
2.3.10.4 Message Structure.....	<a href="#">75</a>
2.3.10.5 Message Values.....	<a href="#">76</a>
2.3.10.6 Message Sort.....	<a href="#">90</a>
2.3.11 Event Final Ranking.....	<a href="#">91</a>
2.3.11.1 Description.....	<a href="#">91</a>
2.3.11.2 Header Values.....	<a href="#">91</a>
2.3.11.3 Trigger and Frequency.....	<a href="#">91</a>
2.3.11.4 Message Structure.....	<a href="#">91</a>
2.3.11.5 Message Values.....	<a href="#">93</a>
2.3.11.6 Message Sort.....	<a href="#">95</a>
3 Message Timeline.....	<a href="#">97</a>
3.1 Preparation Phase.....	<a href="#">97</a>
3.2 Before competition.....	<a href="#">97</a>
3.3 Before a game.....	<a href="#">97</a>
3.4 During each period.....	<a href="#">98</a>
3.5 After end of the game.....	<a href="#">98</a>
3.6 After the Bronze Medal Game.....	<a href="#">99</a>
3.7 After the Gold Medal Game.....	<a href="#">99</a>
4 Document Control.....	<a href="#">100</a>



International  
Olympic  
Committee

WOG-2022-IHO-1.2 APP



# 1 Introduction

## 1.1 This document

This document includes the ODF Ice Hockey Data Dictionary. This Data Dictionary refines the messages described in the ODF General Messages Interface Document specifically for this discipline.

## 1.2 Objective

The objective of this document is to provide a complete and formal definition of the ODF Ice Hockey Data Dictionary, with the intention that the information message producer and the message consumer can successfully interchange the information as the competition is run.

## 1.3 Main Audience

The main audience of this document is the IOC as the ODF promoter, ODF users such as the World News Press Agencies, Rights Holding Broadcasters and International Sports Federations.

## 1.4 Glossary

The following abbreviations are used in this document.

Acronym	Description
IF	International Federation
IOC	International Olympic Committee
NOC	National Olympic Committee
ODF	Olympic Data Feed
RSC	Results System Codes
WNPA	World News Press Agencies

## 1.5 Related Documents

Document Title	Document Description
ODF Foundation Principles	The document explains the environment & general principles for ODF
ODF General Messages Interface	The document describes the ODF General Messages
Common Codes	The document describes the ODF Common codes
ODF Header Values	The document details the header values which shows which RSCs are used in which messages.
ORIS Sports Document	The document details the sport specific requirements



## 2 Messages

### 2.1 Ice Hockey Overview

#### MESSAGES IN EACH EVENT

All games have the same messages sent and all games are managed in isolations. Each game includes DT\_RESULT, DT\_PLAY\_BY\_PLAY and DT\_CURRENT messages. DT\_CURRENT only includes the clock and the current score.

#### SCHEDULE

The DT\_SCHEDULE/DT\_SCHEDULE\_UPDATE message will include each game (schedule=Y) only which is aligned with the same RSC for DT\_RESULT.

#### PARALYMPIC

The Paralympic Games are the same except athlete class is added and gender is mixed.

### 2.2 Applicable Messages

The following table is a full list of all ODF messages and describes the list of messages used in this discipline.

- The column “Message type” indicates the DocumentType that identifies a message
- The column “Message name” is the message name identified by the message type
- The column “Message extended” indicates whether a particular message has extended definition in regards to those that are general for all sports. If one particular message is not extended, then it follows the general definition rules.
- Message responsibilities appears in the ODF General Document.

Message Type	Message Name	Message\nextended
DT_SCHEDULE DT_SCHEDULE_UPDATE	/ Competition schedule / Competition schedule update	X
DT_PARTIC / DT_PARTIC_UPDATE	List of participants by discipline / List of participants by discipline update	X
DT_PARTIC_NAME	Participant Names	
DT_PARTIC_TEAMS DT_PARTIC_TEAMS_UPDATE	/ List of teams / List of teams update	X
DT_RESULT	Event Unit Start List and Results	X
DT_CURRENT	Current Information	X
DT_PLAY_BY_PLAY	Play by Play	X
DT_IMAGE	Image	X
DT_POOL_STANDING	Pool Standings	X
DT_BRACKETS	Brackets	X
DT_STATS	Statistics	X
DT_RANKING	Event Final Ranking	X



DT_MEDALLISTS	Event's Medallists	
DT_MEDALLISTS_DISCIPLINE	Medallists by discipline	
DT_MEDALS	Medal standings	
DT_COMMUNICATION	Communication	
DT_PRESENTER	Medal Presenters	
DT_LOCAL_ON	Discipline/venue start transmission	
DT_LOCAL_OFF	Discipline/venue stop transmission	
DT_KA	Keep Alive	
DT_ALERT	Alert	
DT_BCK	Background Document	
DT_BIO_PAR	Participant Biography	
DT_BIO_TEA	Team Biography	
DT_NEWS	News Document	
DT_PDF	PDF Message	





## 2.3 Messages

### 2.3.1 Competition schedule / Competition schedule update

#### 2.3.1.1 Description

The Competition schedule is a bulk message provided for one discipline. As a general rule, it contains the complete schedule information for all event units needed to run a competition and excludes event units for activities such as unofficial training and press conferences.

This message contains the competition timetable for a complete discipline as well as status for each competition unit and is updated from OVR via the schedule update message.

All event units in codes which have the 'schedule' flag set to 'Y' or 'S' are included in schedule messages regardless of status (those without status must be sent as UNSCHEDULED if the schedule flag is 'Y' or 'S').

The arrival of the competition schedule message resets all the previous schedule information for one discipline.

The StartList component of the message is only included in the case that the Unit Type is one of HATH, HCOUP or HTEAM and at least one of the competitors are known.

The Composition component (i.e. listing athletes) is only included in the case that the Unit Type is one of HATH or HCOUP.

For reference the applicable unit types (from common codes) are:

HATH Individual Head to Head units (e.g. ARC, BDM, TEN, SBD etc)  
HCOUP Pairs/Couples Head to Head units (e.g. BDM, TEN etc)  
HTEAM Teams Head to Head units (e.g. BKB, VBV, HBL, CUR, IHO etc)

Managing when start times are not known.

In some disciplines the start time of each unit is not known and the unit are managed by order rather than time.

In these disciplines only the time of the first unit (or first unit per location) is known and distributed. In this case all units should be sent with the same start time and those following units flagged as HideStartDate (and finish). To be able to correctly order these units then the Order attribute is used (and must be sent from the venue).

To ensure there are no incorrectly ordered units then the start time must not be updated to the actual start time (there is an actual start time field to cater for this). For example:

Start Time	Display in message	Unit	HideStartDate	Location	Order
12:00	12:00	Unit 1	N	Court 2	1
12:00	Match 2	Court 2 Unit 2	Y	Court 2	2



12:00 Match 3 Court 2 Unit 3 Y Court 2 3  
16:30 Not before 16:30 Unit 4 Y Court 2 4

If the discipline requires some text describing the order then StartText is used. Typical uses include "Not before 17:00" or "SUN 29 - 2nd match on CC" or "Follows".

Advice for end users - how to sort event units and use DT\_SCHEDULE:

- When displaying the schedule users must use the following sort order to display as intended:

1. By day (or filter by day)
2. By location if applicable (in a small number of sports, when EventOrder = LOC in Discipline codes)
3. By Time (regardless if HideStartDate="Y")
4. By Order

- The Order is sent for all units where HideStartDate="Y" or if special ordering is required else not sent. Start with 1 each new session each day

- End users should display StartText if HideStartDate="Y"

If a StartText value of "Not before hh:mm" is used then it is expected that the StartDate sent is the same hh:mm.

Competition schedule update:

Competition schedule update is an update message. It is not a complete schedule information message, but only the schedule data being modified.

The arrival of this message updates the previous schedule information for one particular event unit(s) or sessions(s), but does not notify any other change for the rest of the event units/sessions except for those contained in the message.

The key of the information updated is Unit @Code. Therefore, any new unit, deleted unit or updated unit will be identified by all this attribute.

It has to be understood that if one DT\_SCHEDULE message arrives, then all previous DT\_SCHEDULE\_UPDATE messages should be discarded.

When message is sent from Competition Schedule application in advance of the Games the element ExtendedInfos/EntendedInfo will contain following information:

- Type=CS, Code=VERSION, the attribute Value will indicate the version details from the competition schedule application

- Type=CS, Code=STATUS the attribute Value will indicate the status details from the competition schedule application

### 2.3.1.2 Header Values

The following table describes the message header attributes.

Attribute	Value	Comment
CompetitionCode	<a href="#">CC @Competition</a>	Unique ID for competition
DocumentCode	<a href="#">CC @Discipline</a>	Full RSC at the discipline level
DocumentType	DT_SCHEDULE DT_SCHEDULE_UPDATE	/ Competition schedule bulk / update
Version	1..V	Version number associated to the message's content. Ascending



		number
FeedFlag	"P"-Production "T"-Test	Test message or production message.
Date	Date	Date when the message is generated, expressed in the local time zone where the message was produced.
Time	Time	Time up to milliseconds when the message is generated, expressed in the local time zone where the message was produced.
LogicalDate	Date	Logical Date of events. This is the same as the physical day except when the unit or message transmission extends after midnight. See full explanation in ODF Foundation.
Source	<a href="#">SC @Source</a>	Code indicating the system which generated the message.

### 2.3.1.3 Trigger and Frequency

The competition schedule will be sent as a bulk message (DocumentType="DT\_SCHEDULE") when available before the Games and then sent multiple times until a date to be confirmed after which only update messages will be sent (DocumentType="DT\_SCHEDULE\_UPDATE") by OVR. There is no automatic triggering and this (DT\_SCHEDULE) message must not be sent after the transfer of control to OVR.

The competition schedule update message should be triggered at any time there has been a competition schedule modification for any previously sent competition schedule bulk message or update message including the addition of start list details (H2H).

Generally start list details for H2H units should be sent immediately when officially known, which should be as soon as possible after the preceding unit changes to official.

The triggers for status changes are described in each sport data dictionary where differences are needed.

If any text descriptions change in a message (as opposed to the code) then this message is not resent to correct previous messages however the new data is to be used in future messages.

### 2.3.1.4 Message Structure

The following table defines the structure of the message.

Level 1	Level 2	Level 3	Level 4	Level 5	Level 6	Level 7
<a href="#">Competition (0.1)</a>						
	Gen					
	Sport					
	Codes					
	<a href="#">Session (0.N)</a>					
		SessionCode				
		StartDate				
		EndDate				
		Leadin				
		Venue				
		VenueName				



	ModificationIndicator	
	SessionStatus	
	SessionType	
	Medal	
	<a href="#">SessionName (1,N)</a>	
		Language
		Value
<a href="#">Unit (0,N)</a>		
	Code	
	PhaseType	
	UnitNum	
	ScheduleStatus	
	StartDate	
	HideStartDate	
	EndDate	
	HideEndDate	
	ActualStartDate	
	ActualEndDate	
	Order	
	Medal	
	Venue	
	Location	
	MediaAccess	
	SessionCode	
	ModificationIndicator	
	<a href="#">StartText (0,N)</a>	
		Language
		Value
	<a href="#">ItemName (1,N)</a>	
		Language
		Value
	<a href="#">ItemDescription (0,N)</a>	
		Language
		-
	<a href="#">VenueDescription (0,1)</a>	
		VenueName
		LocationName
	<a href="#">StartList (0,1)</a>	
		<a href="#">Start (1,N)</a>



StartOrder	
SortOrder	
PreviousWLT	
PreviousUnit	
<a href="#">Competitor (1,1)</a>	
Code	
Type	
Organisation	
<a href="#">Description (0,1)</a>	
TeamName	
IFld	

### 2.3.1.5 Message Values

Element: Competition (0,1)			
Attribute	M/O	Value	Description
Gen	O	S(20)	Version of the General Data Dictionary applicable to the message
Sport	O	S(20)	Version of the Sport Data Dictionary applicable to the message
Codes	O	S(20)	Version of the Codes applicable to the message

Element: Competition /Session (0,N)			
Attribute	M/O	Value	Description
SessionCode	M	S(10)	Code of the sports competition session which contains this event unit. Usually in the format DDD00. DDD is the discipline and 00 is the session number within the discipline. For example ARC02 for the second session in Archery.
StartDate	M	DateTime	Start date. Example: 2006-02-26T10:00:00+01:00
EndDate	M	DateTime	End date. Example: 2006-02-26T10:00:00+01:00
Leadin	O	m:ss	Amount of time from session start to first scheduled unit.
Venue	M	<a href="#">CC @VenueCode</a>	Venue where the session takes place
VenueName	M	S(25)	Venue ENG Description (not code) from Common Codes
ModificationIndicator	O	S(1)	Attribute is mandatory in the DT_SCHEDULE_UPDATE message. N = New or U = Update.
SessionStatus	O	<a href="#">CC @ScheduleStatus</a>	Only use CANCELLED if applicable. All other sessions are assumed to be scheduled. There is no change to running or finished.
SessionType	O	<a href="#">CC @SessionType</a>	Session type of the Session.
Medal	O	S(1)	Send Y if this session includes at least one unit where a medal (any type of medal) is to be decided.



			Do not send if no such unit.
--	--	--	------------------------------

Element: Competition /Session /SessionName (1,N)			
Attribute	M/O	Value	Description
Language	M	<a href="#">CC @Language</a>	Language of the Session Description
Value	M	S(40)	Name of the sports competition session

### Sample (Session)

```
<Session Code="ATH01" StartDate="2016-08-12T10:00:00+01:00" EndDate="2016-08-12T14:00:00+05:00" LeadIn="5:00" Venue="STA" VenueName="Olympic Stadium" >
  <SessionName Language="ENG" Value="Athletics Session 1" />
</Session>
<Session Code="ATH02" StartDate="2016-08-12T18:00:00+01:00" EndDate="2016-08-12T21:00:00+05:00" LeadIn="5:00" Venue="STA" VenueName="Olympic Stadium" >
  <SessionName Language="ENG" Value="Athletics Session 2" />
</Session>
```

Element: Competition /Unit (0,N)			
Attribute	M/O	Value	Description
Code	M	<a href="#">CC @Unit</a>	
PhaseType	M	<a href="#">CC @PhaseType</a>	Phase type for the unit
UnitNum	O	S(15)	Game number
ScheduleStatus	M	<a href="#">CC @ScheduleStatus</a>	Unit Status
StartDate	O	DateTime	<p>Start date. This attribute may not be sent when the @ScheduleStatus is UNSCHEDULED. For other statuses the StartDate is expected otherwise ordering is display is incorrert (including CANCELLED and POSTPONED).</p> <p>This is the scheduled Start date and time and will not be updated when an event unit starts, that is, do not change to actual (updated only with RESCHEDULED status)</p> <p>Where HideStartDate="Y" then this should be filled with the session start time or the start time of a group of units for all similar units and Order used for sorting. This method is not used in team sports where HideStartDate="Y" is only used temporarily to remove times.</p> <p>Example: 2006-02-26T10:00:00+01:00</p>
HideStartDate	O	S(1)	<p>Send 'Y' if StartDate (scheduled start time) should not be displayed. It may be an estimate or 'fake' time. Do not send if StartDate (scheduled start time) is to be displayed.</p> <p>Start times of some units depend on the finalisation of previous event units and therefore there is no fixed start time in these cases this field is set to 'Y'.</p> <p>When the flag is set to 'Y' then the time is used for sorting purposes but should not be displayed.</p>



EndDate	O	DateTime	<p>This is the scheduled end date and time and will not be updated when an event unit ends, that is, do not change to actual (updated only with RESCHEDULED status relative to StartDate)</p> <p>This attribute is not required when the @ScheduleStatus is UNSCHEDULED or CANCELLED.</p> <p>Example: 2006-02-26T10:00:00+01:00</p>
HideEndDate	O	S(1)	<p>Send 'Y' if EndDate scheduled end time is not to be displayed.</p> <p>Some event units have a scheduled end time well bounded, however, some event units in some circumstances have a scheduled end time not quite variable (example, some press conferences or tennis matches, etc.) in these cases this field is set to 'Y' and should not be displayed.</p>
ActualStartDate	O	DateTime	<p>This attribute is expected once the event unit has started.</p> <p>Example: 2006-02-26T10:03:22+01:00</p>
ActualEndDate	O	DateTime	<p>This attribute is expected once the event unit has finished.</p> <p>Example: 2006-02-26T12:43:51+01:00</p>
Order	O	Numeric ###0	<p>Order of the units when displayed. This field is considered in two situations:</p> <ol style="list-style-type: none"> <li>1. If HideStartDate = 'Y' then send at least for all Units in an affected session though it is suggested to be sent for all units in a discipline where the concept is used in the discipline.</li> <li>2. If some units start at the same time and a particular order of the units is expected.</li> </ol> <p>It is generally recommended to start at 1 in each session each day though may be ordered independently by location starting at 1 for each location in each session (where the schedule is ordered by location) or using other numbers to ensure the order of two using starting at the same time are displayed in the appropriate order.</p>
Medal	O	<a href="#">SC @UnitMedalType</a>	<p>Medal indicator. Do not send if not a medal event unit</p>
Venue	O	<a href="#">CC @VenueCode</a>	<p>Venue where the unit takes place Mandatory unless UNSCHEDULED Can use TBD if the Venue is not known yet (see CC).</p>
Location	O	<a href="#">CC @Location</a>	<p>Location where the unit takes place. Mandatory unless UNSCHEDULED. Can use TBD if the Location is not known yet or a generic code for the discipline (see CC).</p>
MediaAccess	O	S(6)	<p>Only applicable for non-competition. If unit is open to media send "OPE", if the unit is closed then send "CLO".</p>
SessionCode	O	S(10)	<p>Code of the sports competition session which contains this event unit. Usually in the format DDD00. DDD is the discipline and 00 is the session number within the discipline. For example ARC02 for the second session in Archery. If a unit finishes in a different session (due to interruption) from the starting one then the SessionCode remains the starting code.</p>
ModificationIndicator	O	N, U	<p>Attribute is mandatory in the DT_SCHEDULE_UPDATE message only</p>



			<p>N-New event unit U-Update event unit If ModificationIndicator='N', then include new event unit. It will be rarely used as most added units were available in "UNSCHEDULED" status.</p> <p>If ModificationIndicator="U", then update the event unit.</p>
--	--	--	--

Element: Competition /Unit /StartText (0,N)			
This element is only used for Competition Schedules when HideStartDate is 'Y'. In this case, English Language is mandatory.			
Attribute	M/O	Value	Description
Language	M	<a href="#">CC @Language</a>	Code Language of the @Value
Value	M	S(20) or a code if available	Text to be displayed in the case that StartDate is not to be displayed (e.g. "After M.1" or "Followed by") Using a code set or fixed text will also be directly displayed and allow end user translation.

Element: Competition /Unit /ItemName (1,N)			
Attribute	M/O	Value	Description
Language	M	<a href="#">CC @Language</a>	Code Language of the @Value
Value	M	S(40)	Item Name / Unit Description.  For competition units show the short unit description from common codes which matches the RSC. As in all messages with a description. Only the ENG description is expected.  For non-competition schedules (where the item description is not in common codes) then add the description.

Element: Competition /Unit /ItemDescription (0,N)			
Attribute	M/O	Value	Description
Language	M	<a href="#">CC @Language</a>	Code Language of the @Value
-	M	Free Text	Item Description for non-competition schedule

Element: Competition /Unit /VenueDescription (0,1)			
Mandatory when Unit/Venue is included			
Attribute	M/O	Value	Description
VenueName	M	S(25)	Venue ENG Description (not code) from Common Codes
LocationName	M	S(30)	Location ENG Description (not code) from Common Codes

Element: Competition /Unit /StartList /Start (1,N)			
StartList information is only sent in the case that the Unit type is one of HATH, HCOUP or HTEAM and at least one of the competitors are known. (Sent as soon as known for applicable units)			
Attribute	M/O	Value	Description
StartOrder	O	Numeric	Competitor's start order





SortOrder	M	Numeric	Used to sort competitors in an event unit (for example, if there is no StartOrder). It is mainly used for display purposes.
PreviousWLT	O	S(1)	W or L for winner of loser of a particular previous unit plays in this unit. This attribute is only filled if the competitors are 100% confirmed as participating at this time and not subject to change depending on TV times etc. Further, the data is removed when the real competitors are known.
PreviousUnit	O	<a href="#">CC @Unit</a>	The full RSC of the unit where this competitor came from. This attribute is only filled if the competitors are 100% confirmed as participating at this time and not subject to change depending on TV times etc. Further, the data is removed when the real competitors are known.

Element: Competition /Unit /StartList /Start /Competitor (1,1)			
Attribute	M/O	Value	Description
Code	M	S(20) with no leading zeroes or SC @CompetitorPlace.	Competitor's ID or another indicator (SC @CompetitorPlace) which may include possible options of: TBD in case that the competitor is unknown at this time but will be available NOCOMP is sent when there is no competitor (and will not come later) BYE is used when there is a scheduled match of BYE.
Type	M	S(1)	T for team
Organisation	O	<a href="#">CC @Organisation</a>	Should be sent when known

Element: Competition /Unit /StartList /Start /Competitor /Description (0,1)			
Attribute	M/O	Value	Description
TeamName	M	S(73)	Team Name where known, must send when available
IFId	O	S(16)	Team IF number, send if available

### 2.3.1.6 Message Sort

Sort by Session @SessionCode.

The message is sorted by Unit@StartDate then by Unit@Order then Unit@Code.  
In case of event unit with no Unit@StartDate defined (example, they are in an event unit status such as UNSCHEDULED), they will be listed at the end in Unit@Code order.



## 2.3.2 List of participants by discipline / List of participants by discipline update

### 2.3.2.1 Description

A participant is considered to be any individual (type athlete, participating or not in the current games) or any official in one or several disciplines or a competitor being part of a team (team member).

Although the participant may participate in more than one event or more than one discipline, this message just contains the information for the discipline of the message, listing the information of all the events for that discipline.

List of participants by discipline (DT\_PARTIC) is a bulk message, provided for each discipline. It is a complete participant information message for one particular discipline. The arrival of this message resets all the previous participants' information for one particular discipline. This message can include a list of current athletes, officials, coaches, guides, technical officials, Reserves and historical athletes regardless of status.

List of participants by discipline update (DT\_PARTIC\_UPDATE) is an update message. It is not a complete list of participants' information by discipline message, only the participant data being modified, i.e. if some data of one participant changes, the element Participant for it with all its children and attributes must be sent.

The key of the information updated consists of the following attribute: Participant @Code. Therefore, any new or updated Participant Discipline-Event will be identified by all these attributes.

### 2.3.2.2 Header Values

The following table describes the message header attributes.

Attribute	Value	Comment
CompetitionCode	<a href="#">CC @Competition</a>	Unique ID for competition
DocumentCode	<a href="#">CC @Discipline</a>	Full RSC at the discipline level
DocumentType	DT_PARTIC DT_PARTIC_UPDATE	/ List of participants by discipline message
DocumentSubtype	S(20)	HISTORICAL if the message is from the historical results provider and only includes historic athletes else the attribute is not included. Never included in _UPDATE message.
Version	1..V	Version number associated to the message's content. Ascending number
FeedFlag	"P"-Production "T"-Test	Test message or production message.
Date	Date	Date when the message is generated, expressed in the local time zone where the message was produced.
Time	Time	Time up to milliseconds when the message is generated, expressed in the local time zone where the message was produced.
LogicalDate	Date	Logical Date of events. This is the same as the physical day except when the unit or message transmission extends after midnight. See full explanation in ODF Foundation.
Source	<a href="#">SC @Source</a>	Code indicating the system which generated the message.



### 2.3.2.3 Trigger and Frequency

The DT\_PARTIC message is sent as a bulk message prior to the Games. It is sent several times up to the date of transfer of control to OVR after which only DT\_PARTIC\_UPDATE messages are sent.

The DT\_PARTIC\_UPDATE message is triggered when there is a modification in the data for any individual after the transfer of control to OVR.

### 2.3.2.4 Message Structure

The following table defines the structure of the message.

Level 1	Level 2	Level 3	Level 4	Level 5	Level 6
<a href="#">Competition (0.1)</a>	Gen				
	Sport				
	Codes				
<a href="#">Participant (1.N)</a>	Code				
	Parent				
	Status				
	GivenName				
	FamilyName				
	PassportGivenName				
	PassportFamilyName				
	PrintName				
	PrintInitialName				
	TVName				
	TVInitialName				
	TVFamilyName				
	LocalFamilyName				
	LocalGivenName				
	Gender				
	Organisation				
	BirthDate				
	Height				
	Weight				
	PlaceofBirth				
	CountryofBirth				
PlaceofResidence					
CountryofResidence					
Nationality					



MainFunctionId			
Current			
OlympicSolidarity			
ModificationIndicator			
<a href="#">Discipline (1,1)</a>			
	Code		
	IFId		
	<a href="#">RegisteredEvent (0,N)</a>		
		Event	
		Bib	
		Class	
		Status	
		<a href="#">EventEntry (0,N)</a>	
			Type
			Code
			Pos
			Value

### 2.3.2.5 Message Values

Element: Competition (0,1)			
Attribute	M/O	Value	Description
Gen	O	S(20)	Version of the General Data Dictionary applicable to the message
Sport	O	S(20)	Version of the Sport Data Dictionary applicable to the message
Codes	O	S(20)	Version of the Codes applicable to the message

#### Sample (Version)

```
<Competition Gen="SOG-2020-1.10" Sport="SOG-2020-IHO-1.10" Codes="SOG-2020-1.20" >
```

Element: Competition /Participant (1,N)			
Attribute	M/O	Value	Description
Code	M	S(20) with no leading zeroes	Participant's ID.  It identifies an athlete or an official and the holding participant's valid information for one particular period of time.  It is used to link other messages to the participant's information.  Participant's information (example @Organisation) will not be the latest for the athlete/official, unless the @Code attribute is



			<p>the same as the @Parent attribute. However, this information could be the one being valid in the particular moment of a start list, event unit results, etc.</p> <p>When the participant is an historical one, then this ID will start with "A" when it is an Athlete, "C" when Coach and "O" when Official.</p>
Parent	M	S(20) with no leading zeroes	<p>Participant's parent ID, which is used to link to the latest valid information for one participant. @Parent attribute should be linked to the latest participant's information, by retrieving that Athlete/Official whose @Code attribute is the same as @Parent.</p> <p>The participant containing @Code attribute being the same as the @Parent attribute will be the one with the latest information for the participant.</p> <p>The @Parent attribute will only be different from @Code in the case that critical personal information has changed from previous competitions. The typical examples are Organisation (for change of country) or Name (particularly for women changing their name at marriage). Further to be clear, @Parent and @Code can only be different if Current = "false".</p>
Status	O	<a href="#">CC @ParticStatus</a>	<p>Participant's accreditation status this attribute is Mandatory in the case of @Current="true" and it is optional in the case that @Current="false".</p> <p>To delete a participant, a specific value of the Status attribute is used.</p>
GivenName	O	S(25)	Given name in WNPA format (mixed case)
FamilyName	M	S(25)	Family name in WNPA format (mixed case)
PassportGivenName	O	S(25)	Passport Given Name (Uppercase).
PassportFamilyName	O	S(25)	Passport Family Name (Uppercase).
PrintName	M	S(35)	Print name (family name in upper case + given name in mixed case)
PrintInitialName	M	S(18)	Print Initial name (for the given name it is sent just the initial, without dot)
TVName	M	S(35)	TV name
TVInitialName	M	S(18)	TV initial name
TVFamilyName	M	S(25)	TV family name
LocalFamilyName	O	S(25)	Family name in the local language in the appropriate case for the local language (usually mixed case)
LocalGivenName	O	S(25)	Given name in the local language in the appropriate case for the local language (usually mixed case)
Gender	M	<a href="#">CC @PersonGender</a>	Participant's gender
Organisation	M	<a href="#">CC @Organisation</a>	Organisation ID
BirthDate	O	YYYY-MM-DD	Date of birth. This information may not be known at the very beginning, but it will be completed for all participants after successive updates
Height	O	S(3)	Height in centimetres. It will be included if this information is available. This information is not needed in the case of officials/referees. "." may be used where the data is not available.



			Not applicable in Paralympic Games
Weight	O	S(3)	Weight in kilograms. It will be included if this information is available. This information is not needed in the case of officials/referees. Do not send attribute if data not available. Not applicable in Paralympic Games
PlaceofBirth	O	S(75)	Place of Birth
CountryofBirth	O	<a href="#">CC @Country</a>	Country ID of Birth
PlaceofResidence	O	S(75)	Place of Residence
CountryofResidence	O	<a href="#">CC @Country</a>	Country ID of Residence
Nationality	O	<a href="#">CC @Country</a>	Participant's nationality. Although this attribute is optional, in very exceptional situations it will not be known, and for this reason not ready to be sent.
MainFunctionId	O	<a href="#">CC @ResultsFunction</a>	Main function In the Case of Current="true" this attribute is Mandatory.
Current	M	boolean	It defines if a participant is participating in the games (true) or is a Historical participant (false).
OlympicSolidarity	O	S(1)	Send Y if the participant is a member of the Solidarity / Scholarship Program else not sent.
ModificationIndicator	M	S(1)	'N' or 'U' Attribute is mandatory in the DT_PARTIC_UPDATE message only  N-New participant (in the case that this information comes as a late entry) U-Update participant  If ModificationIndicator='N', then include new participant to the previous bulk-loaded list of participants  If ModificationIndicator='U', then update the participant to the previous bulk-loaded list of participants  To delete a participant, a specific value of the Status attribute is used.

**Element: Competition /Participant /Discipline (1,1)**

All participating athletes will be assigned at least one discipline, it could be more. Each accredited official will be assigned at least one discipline, but it could be more. If an athlete or official is assigned to more than one discipline, it will be included in the participant message of both disciplines.

Attribute	M/O	Value	Description
Code	M	<a href="#">CC @Discipline</a>	Full RSC of the Discipline. It is the discipline code used to fill the OdfBody @DocumentCode attribute.
IFId	O	S(16)	Competitor's federation number for the corresponding discipline.

**Element: Competition /Participant /Discipline /RegisteredEvent (0,N)**

All accredited athletes will be assigned to one or more events. There is one exception: in some sports, substitutes may be accredited without any associated event. Historical athletes are not registered to any event.

Attribute	M/O	Value	Description
-----------	-----	-------	-------------



Event	M	<a href="#">CC @Event</a>	Full RSC of the Event
Bib	O	S(2)	Jersey number
Class	O	CC @DisciplineClass	Code to identify the class of the athlete. This attribute is mandatory for athletes in Paralympic ice hockey
Status	O	<a href="#">SC @AthleteStatus</a>	Participant status. Send if applicable else do not send.

Element: Competition /Participant /Discipline /RegisteredEvent /EventEntry (0,N)				
Send if there are specific athlete's event entries.				
Type	Code	Pos	Description	
ENTRY	POSITION	N/A	Element Expected: As soon as it is known (this information can be sent in both messages).	
	<b>Attribute</b>	<b>M/O</b>	<b>Value</b>	<b>Description</b>
	Value	M	<a href="#">CC @Position</a>	Position Code for the player
ENTRY	HAND	N/A	Element Expected: As soon it is known (this information can be sent in both messages). Not applicable in Paralympics	
	<b>Attribute</b>	<b>M/O</b>	<b>Value</b>	<b>Description</b>
	Value	M	<a href="#">SC @Hand</a>	Handedness of the player
ENTRY	CLUB_LEAGUE	N/A	Element Expected: As soon as it is known (it can be sent in both messages)	
	<b>Attribute</b>	<b>M/O</b>	<b>Value</b>	<b>Description</b>
	Value	M	S(25)	Club League
ENTRY	CLUB_NAME	N/A	Element Expected: As soon it is known (it can be sent in both messages).	
	<b>Attribute</b>	<b>M/O</b>	<b>Value</b>	<b>Description</b>
	Value	M	S(25)	Name of the club of the player
ENTRY	CLUB_CITY	N/A	Element Expected: As soon it is known (it can be sent in both messages).	
	<b>Attribute</b>	<b>M/O</b>	<b>Value</b>	<b>Description</b>
	Value	M	S(25)	Club City
ENTRY	CLUB_ORG	N/A	Element Expected: As soon it is known (it can be sent in both messages).	
	<b>Attribute</b>	<b>M/O</b>	<b>Value</b>	<b>Description</b>
	Value	M	<a href="#">CC @Country</a>	Club Country Code

### Sample (Participants)



```
<Discipline Code="IHO-----" IFId="203258" >  
  <RegisteredEvent Event="IHOMTEAM6-----" >  
    <EventEntry Type="ENTRY" Code="POSITION" Value="D" />  
    <EventEntry Type="ENTRY" Code="HAND" Value="L" />  
    <EventEntry Type="ENTRY" Code="CLUB_NAME" Value="Vancouver Canucks" />  
    <EventEntry Type="ENTRY" Code="CLUB_ORG" Value="CAN" />  
  </RegisteredEvent>  
</Discipline>
```

### 2.3.2.6 Message Sort

The message is sorted by Participant @Code





## 2.3.3 List of teams / List of teams update

### 2.3.3.1 Description

DT\_PARTIC\_TEAMS contains the list of teams related to the current competition.

List of teams (DT\_PARTIC\_TEAMS) is a bulk message by discipline. The list is always complete. The arrival of this message resets all the previous participant teams' information for that discipline. It is assumed that all teams appearing in this list are valid, in the meaning that they are participating or they could participate in one event.

List of teams update (DT\_PARTIC\_TEAMS\_UPDATE) is an update message. It is not a complete list of teams' information message. It only contains the data of a team being modified.

### 2.3.3.2 Header Values

The following table describes the message header attributes.

Attribute	Value	Comment
CompetitionCode	<a href="#">CC @Competition</a>	Unique ID for competition
DocumentCode	<a href="#">CC @Discipline</a>	Full RSC at the discipline level
DocumentType	DT_PARTIC_TEAMS / DT_PARTIC_TEAMS_UPDATE	List of participant teams message
DocumentSubtype	S(20)	HISTORICAL if the message is from the historical results provider and only includes historic teams else the attribute is not included. Never included in _UPDATE message.
Version	1..V	Version number associated to the message's content. Ascending number
FeedFlag	"P"-Production "T"-Test	Test message or production message.
Date	Date	Date when the message is generated, expressed in the local time zone where the message was produced.
Time	Time	Time up to milliseconds when the message is generated, expressed in the local time zone where the message was produced.
LogicalDate	Date	Logical Date of events. This is the same as the physical day except when the unit or message transmission extends after midnight. See full explanation in ODF Foundation.
Source	<a href="#">SC @Source</a>	Code indicating the system which generated the message.

### 2.3.3.3 Trigger and Frequency

The DT\_PARTIC\_TEAMS message is sent as a bulk message before the Games. It is sent several times up to the date of transfer of control to OVR after which only DT\_PARTIC\_TEAMS\_UPDATE messages are sent.

The DT\_PARTIC\_TEAMS\_UPDATE message is triggered when there is a modification in the data for any team after the transfer of control to OVR.

### 2.3.3.4 Message Structure

The following table defines the structure of the message.



Level 1	Level 2	Level 3	Level 4	Level 5	Level 6
<a href="#">Competition (0,1)</a>	Gen Sport Codes				
	<a href="#">Team (1,N)</a>	Code Organisation Number Name ShortName TVTeamName Gender Current TeamType ModificationIndicator			
		<a href="#">Composition (0,1)</a>	<a href="#">Athlete (0,N)</a>	Code Order	
		<a href="#">TeamOfficials (0,1)</a>	<a href="#">Official (1,N)</a>	Code Function Order	
		<a href="#">Discipline (0,1)</a>	Code <a href="#">RegisteredEvent (0,1)</a>	Event <a href="#">EventEntry (0,N)</a>	Type Code Pos Value

### 2.3.3.5 Message Values

Element: Competition (0,1)			
Attribute	M/O	Value	Description



Gen	O	S(20)	Version of the General Data Dictionary applicable to the message
Sport	O	S(20)	Version of the Sport Data Dictionary applicable to the message
Codes	O	S(20)	Version of the Codes applicable to the message

<b>Element: Competition /Team (1,N)</b>			
<b>Attribute</b>	<b>M/O</b>	<b>Value</b>	<b>Description</b>
Code	M	S(20) with no leading zeroes	Team's ID
Organisation	M	<a href="#">CC @Organisation</a>	Team organisation's ID
Number	O	Numeric #0	Team's number. If there is not more than one team for one organisation participating in one event, it is 1. Otherwise, it will be incremental, 1 for the first organisation's team, 2 for the second organisation's team, etc. Required in the case of current teams.
Name	M	S(73)	Team name
ShortName	M	S(40)	Team Short Name
TVTeamName	M	S(21)	TV Team Name
Gender	M	CC @SportGender	Gender Code of the Team
Current	M	boolean	It defines if a team is participating in the games (true) or it is a Historical team (false)
TeamType	M	SC @TeamType	Send the team type. This is how the name is constructed to allow clients to build in other languages. Use ORG in this discipline.
ModificationIndicator	M	N, U, D	Attribute is mandatory in the DT_PARTIC_TEAMS_UPDATE message only N-New team (in the case that this information comes as a late entry) U-Update team D-Delete team If ModificationIndicator='N', then include new team to the previous bulk-loaded list of teams If ModificationIndicator='U', then update the team to the previous bulk-loaded list of teams If ModificationIndicator='D', then delete the team to the previous bulk-loaded list of teams

<b>Element: Competition /Team /Composition /Athlete (0,N)</b>			
<b>In the case of current teams the number of athletes is 2 or more.</b>			
<b>Attribute</b>	<b>M/O</b>	<b>Value</b>	<b>Description</b>
Code	M	S(20) with no leading zeroes	Athlete's ID of the listed team members
Order	O	Numeric	Team member order

<b>Element: Competition /Team /TeamOfficials /Official (1,N)</b>			
<b>Send if there are specific officials for the team. Does not apply to historical teams.</b>			
<b>Attribute</b>	<b>M/O</b>	<b>Value</b>	<b>Description</b>
Code	M	S(20) with no leading zeroes	Official's ID of the listed team's officials.



		zeroes	For all team officials
Function	M	<a href="#">CC @ResultsFunction</a>	Official's function for the team.
Order	O	Numeric #0	Official's order in the team.

Element: Competition /Team /Discipline (0,1)			
Each team is assigned just to one discipline. Discipline is expected unless ModificationIndicator="D"			
Attribute	M/O	Value	Description
Code	M	<a href="#">CC @Discipline</a>	Full RSC of the Discipline

Element: Competition /Team /Discipline /RegisteredEvent (0,1)			
Each current team is assigned to one event.			
Attribute	M/O	Value	Description
Event	M	<a href="#">CC @Event</a>	Full RSC of the Event

Element: Competition /Team /Discipline /RegisteredEvent /EventEntry (0,N)			
Send if there are specific team's event entries.			
Type	Code	Pos	Description
ENTRY	GROUP	N/A	Element Expected: As soon as it is known (this information can be sent in both messages).
	<b>Attribute</b>	<b>M/O</b>	<b>Value</b>
	Value	M	S(1)
ENTRY	UNIFORM	Numeric 0	Pos Description: Sequential number for each uniform colour Element Expected: As soon as this information is known (it can be sent in both messages)
	<b>Attribute</b>	<b>M/O</b>	<b>Value</b>
	Value	M	S(25)

### Sample (Team)



```
<Team Code="HOCMTEAM7-----ESP01" Organisation="ESP" Number="1" Name="Spain" TVTeamName="Spain" Gender="M"
Current="true" ModificationIndicator="U">
  <Composition>
    <Athlete Code="2005035" Order="1" />
    <Athlete Code="2005037" Order="2" />
    <Athlete Code="2005038" Order="3" />
    <Athlete Code="2005040" Order="4" />
    <Athlete Code="2005047" Order="5" />
  ...
  </Composition>
  <TeamOfficials>
    <Official Code="2005094" Function="COACH" />
    <Official Code="2456788" Function="TM_MGR" />
  </TeamOfficials>
  <Discipline Code="CUR-----" >
    <RegisteredEvent Event="HOCMTEAM7-----" />
    <EventEntry Type="ENTRY" Code="GROUP" Value="A" />
    <EventEntry Type="ENTRY" Code="UNIFORM" Pos="1" Value="Red" />
    <EventEntry Type="ENTRY" Code="UNIFORM" Pos="2" Value="White" />
  </RegisteredEvent>
  </Discipline>
</Team>
```

### 2.3.3.6 Message Sort

The message is sorted by Team @Code.



## 2.3.4 Event Unit Start List and Results

### 2.3.4.1 Description

The Event Unit Start List and Results is a message containing both the start list and results information of the competitors in one (individual or team) event unit.

This is always a full message and all applicable elements and attributes are always sent.

### 2.3.4.2 Header Values

The following table describes the message header attributes.

Attribute	Value	Comment
CompetitionCode	<a href="#">CC @Competition</a>	Unique ID for competition
DocumentCode	<a href="#">CC @Unit</a>	Full RSC of the event unit (game)
DocumentSubcode	N/A	N/A
DocumentType	DT_RESULT	Event Unit Start List and Results message
DocumentSubtype	N/A	N/A
Version	1..V	Version number associated to the message's content. Ascending number
ResultStatus	<a href="#">CC @ResultStatus</a>	It indicates whether the result is official (or intermediate etc). START_LIST INTERMEDIATE (After each period ) LIVE (used during the competition when nothing else applies). OFFICIAL
FeedFlag	"P"-Production "T"-Test	Test message or production message.
Date	Date	Date when the message is generated, expressed in the local time zone where the message was produced.
Time	Time	Time up to milliseconds when the message is generated, expressed in the local time zone where the message was produced.
LogicalDate	Date	Logical Date of events. This is the same as the physical day except when the unit or message transmission extends after midnight. See full explanation in ODF Foundation.
Source	<a href="#">SC @Source</a>	Code indicating the system which generated the message.

### 2.3.4.3 Trigger and Frequency

Follow the general definition, taking also into account the following:

- \* START\_LIST: As soon as any of the Game roster, line-up or starters are known and any change/addition to these only before the start of the match.
- \* LIVE: At the beginning of each period until the completion of the period.
- \* LIVE: After every change in any data during the period [scores etc.].
- \* INTERMEDIATE: After each period.
- \* OFFICIAL: After the unit.

When a team forfeits, the following sequence of messages and content should be expected:

- \* PRIOR ACTION: Before generating any ODF message, match and statistics data into database and



scoring software (OVR) core must revert to the stage as before the beginning of the match.


\* MESSAGE GENERATION: When a Team forfeits after the game has started, and the game actions and statistics need to be erased the following sequence of messages is applied:

- DT\_RESULT (ResultStatus=OFFICIAL)
  - + In the content of DT\_RESULT
  - + Remove <Periods> element completely
  - + Remove <Result/Competitor/StatsItems> element completely for both teams
  - + Remove <Result/Competitor/Composition/Athlete/StatsItems> element for both teams
- DT\_PLAY\_BY\_PLAY (ResultStatus=OFFICIAL)
  - + Remove <Actions> element completely
- DT\_STATS (ResultStatus as applicable)
- DT\_BRACKET, DT\_POOL\_STANDINGS, DT\_COMMUNICATION as well as the generation of any other message that is affected by the match score is not mentioned here. Generation of those messages is considered normal.


### 2.3.4.4 Message Structure

The following table defines the structure of the message.

Level 1	Level 2	Level 3	Level 4	Level 5	Level 6	Level 7	Level 8
<a href="#">Competition (0.1)</a>							
	Gen						
	Sport						
	Codes						
	<a href="#">ExtendedInfos (0.1)</a>						
		<a href="#">UnitDateTime (0.1)</a>					
			StartDate				
		<a href="#">ExtendedInfo (0.N)</a>					
			Type				
			Code				
			Pos				
			Value				
		<a href="#">SportDescription (0.1)</a>					
			DisciplineName				
			EventName				
			Gender				
			SubEventName				
			UnitNum				
		<a href="#">VenueDescription (0.1)</a>					
			Venue				
			VenueName				
			Location				
			LocationName				
			Attendance				

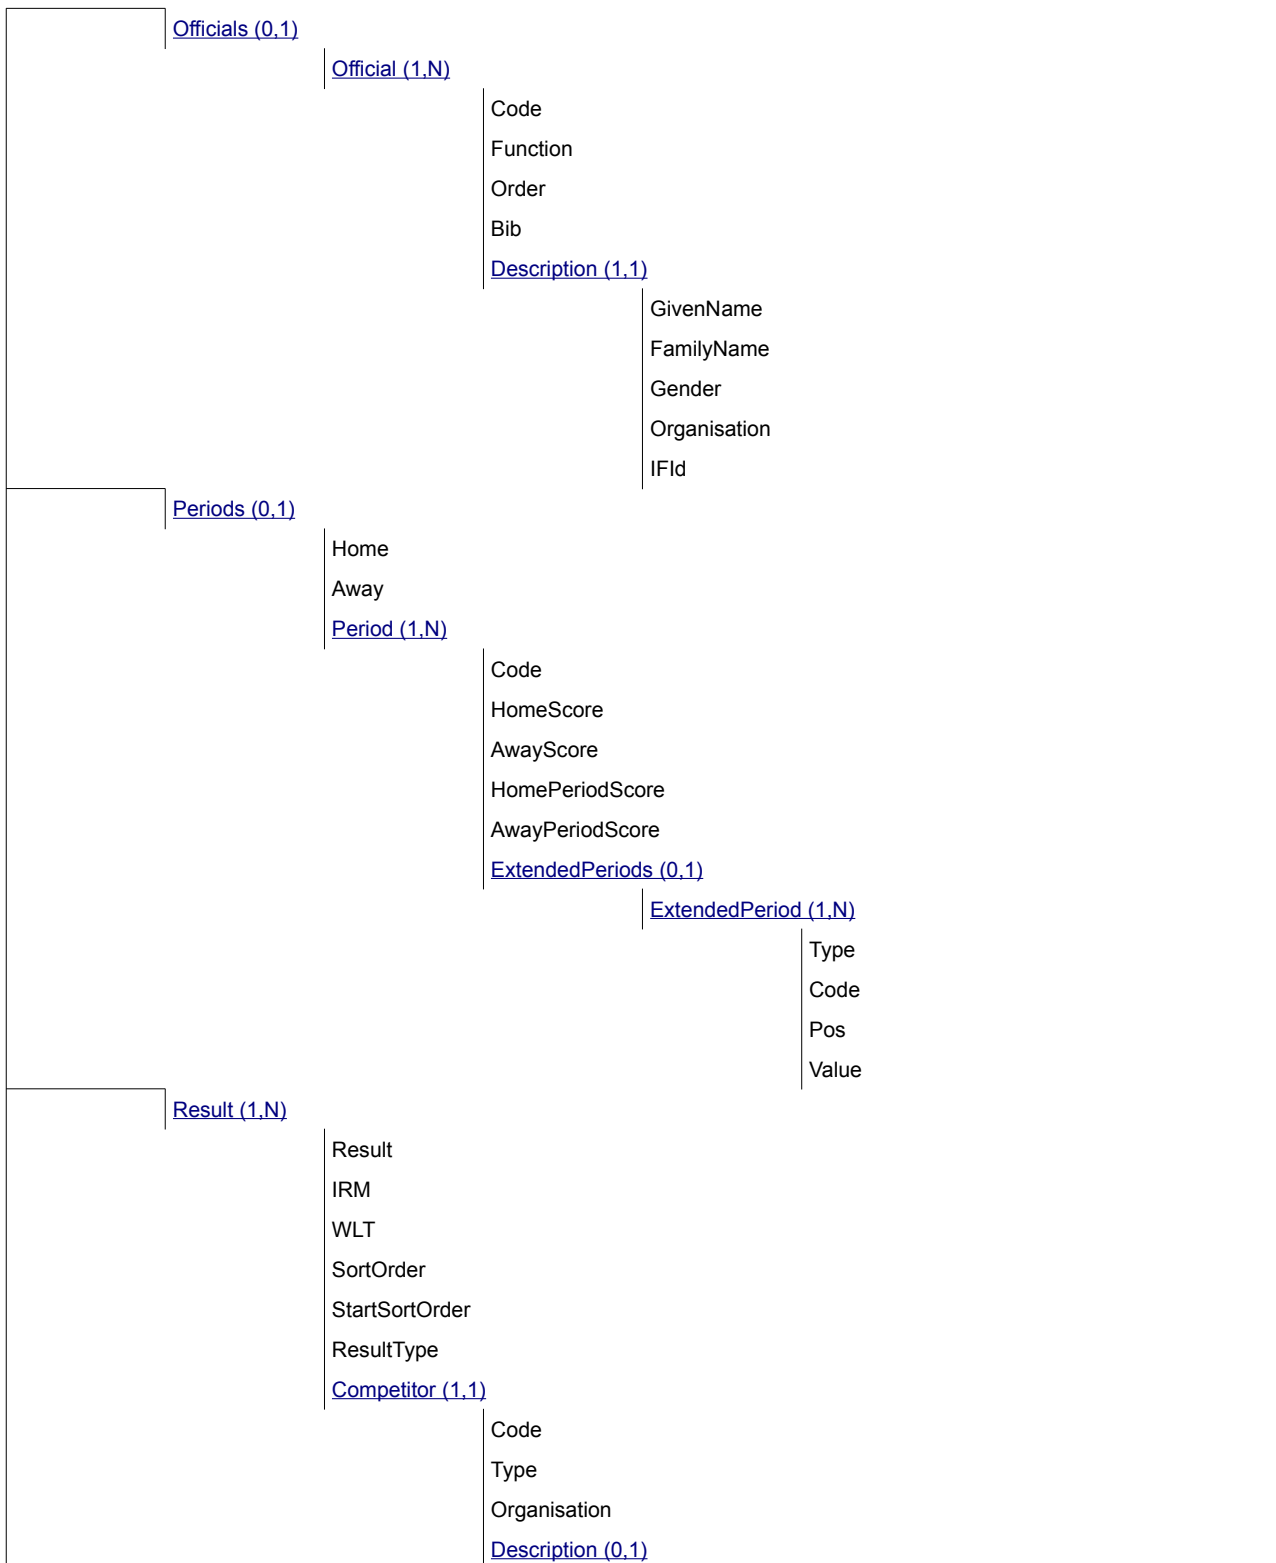



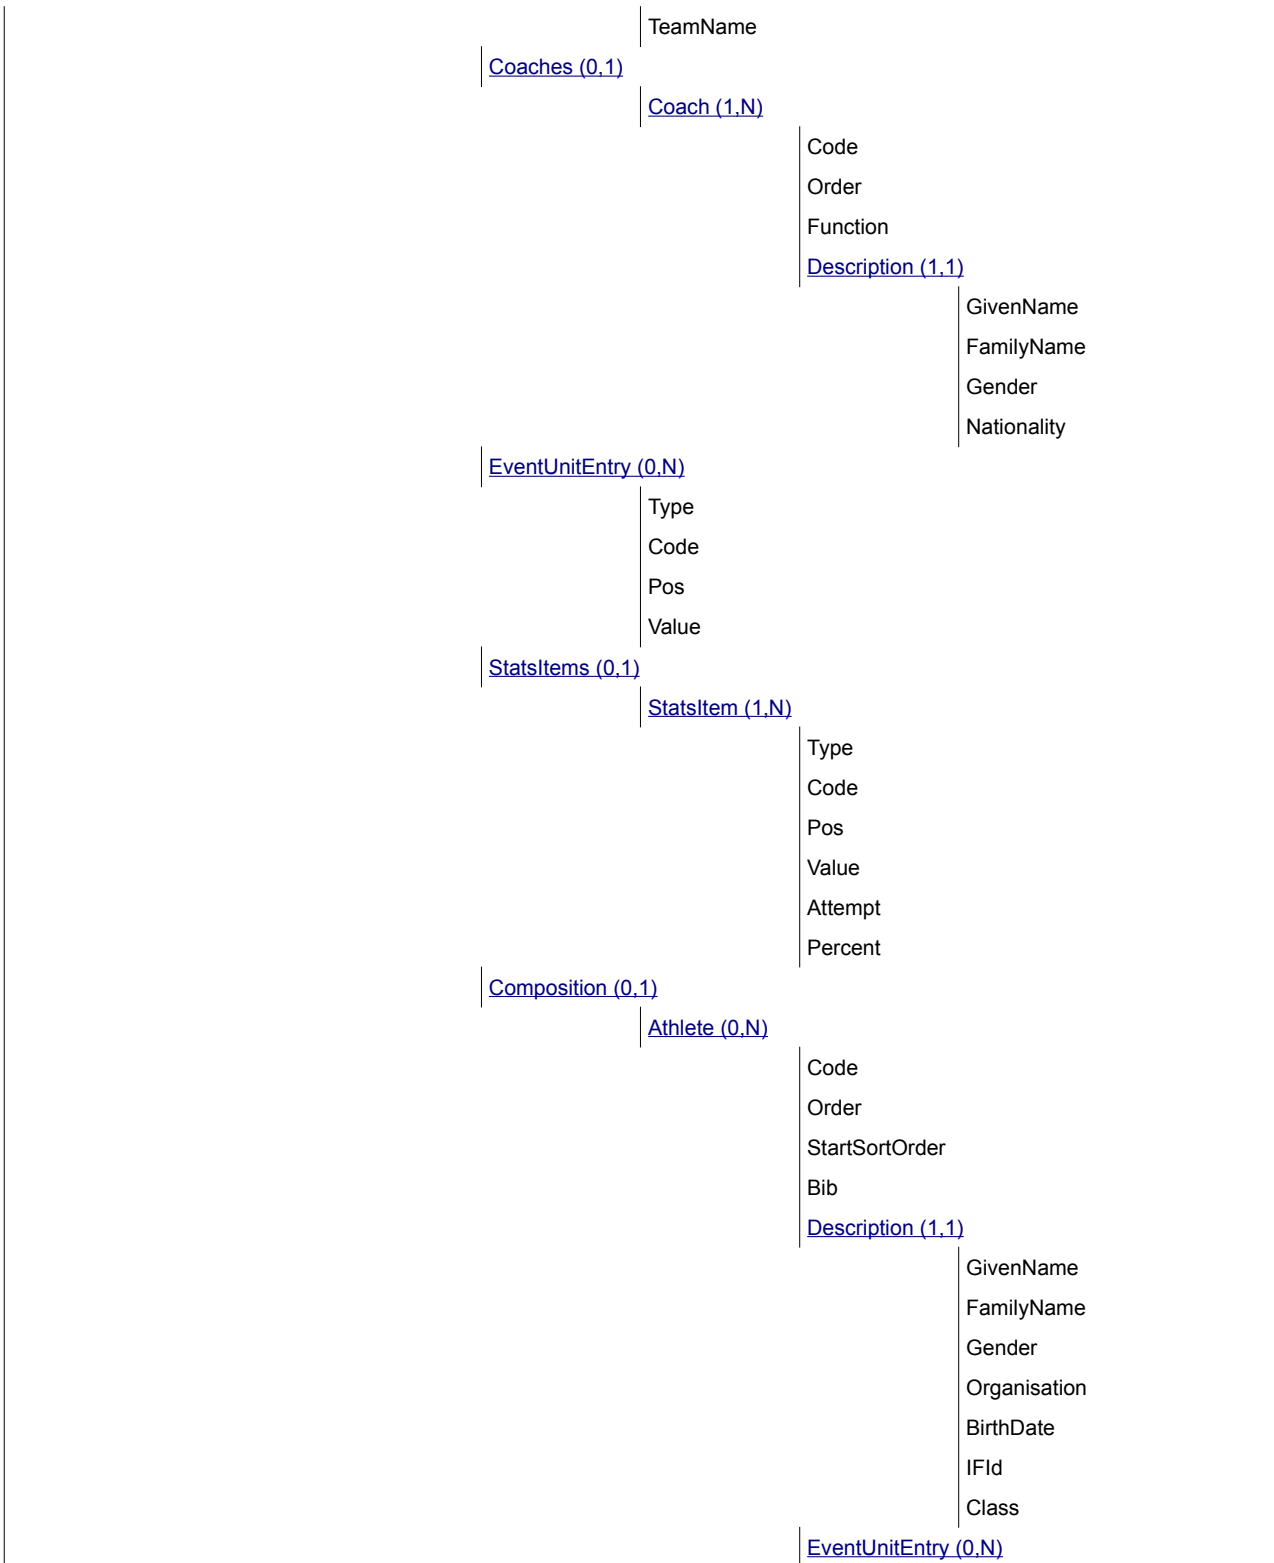



	Type
	Code
	Pos
	Value
<a href="#">StatsItems (0,1)</a>	
	<a href="#">StatsItem (1.N)</a>
	Type
	Code
	Pos
	Value
	Attempt
	Avg
	Percent

### 2.3.4.5 Message Values

Element: Competition (0,1)			
Attribute	M/O	Value	Description
Gen	O	S(20)	Version of the General Data Dictionary applicable to the message
Sport	O	S(20)	Version of the Sport Data Dictionary applicable to the message
Codes	O	S(20)	Version of the Codes applicable to the message

Element: Competition /ExtendedInfos /UnitDateTime (0,1)			
Actual start date and time / end date and time. (do not include until unit starts)			
Attribute	M/O	Value	Description
StartDate	M	DateTime	Actual start date-time. Do not include until unit starts.

Element: Competition /ExtendedInfos /ExtendedInfo (0,N)			
Type	Code	Pos	Description
UI	PERIOD	N/A	Element Expected: Send when LIVE or INTERMEDIATE.
	<b>Attribute</b>	<b>M/O</b>	<b>Value</b>
	Value	M	<a href="#">SC @Period</a>
DISPLAY	String	Numeric 0	Code Description: Send the @Code of the last updated Result / Competitor /StatsItems /StatsItem or Result /Competitor /Composition /Athlete /StatsItems /StatsItem May be: SOG, GF, ASSIST, PIM Pos Description: Sequential number within message. Element Expected:



Attribute	M/O	Value	Description
Value	M	S(20)	When available and only when the unit is LIVE. Send multiple if applicable. Send the competitor ID of the athlete and/or team who was updated.

### Sample (ExtendedInfo)

```
<ExtendedInfos>
<UnitDateTime StartDate="2014-02-08T12:00:00+04:00" />
<UnitInfo Type="UI" Code="PERIOD" Value="P2" />
<ExtendedInfo Type="DISPLAY" Code="SOG" Pos="1" Value="2518090" />
<ExtendedInfo Type="DISPLAY" Code="SOG" Pos="2" Value="IHOWTEAM6---USA01" />
```

### Element: Competition /ExtendedInfos /SportDescription (0,1)

Attribute	M/O	Value	Description
DisciplineName	M	S(40)	Discipline ENG Description (not code) from Common Codes
EventName	M	S(40)	Event ENG Description (not code) from Common Codes.
Gender	M	CC @SportGender	Gender code for the event unit
SubEventName	M	S(40)	EventUnit ENG Description (not code) from Common Codes
UnitNum	O	S(6)	Game number

### Element: Competition /ExtendedInfos /VenueDescription (0,1)

Attribute	M/O	Value	Description
Venue	M	<a href="#">CC @VenueCode</a>	Venue Code
VenueName	M	S(25)	Venue ENG Description (not code) from Common Codes
Location	M	<a href="#">CC @Location</a>	Location code
LocationName	M	S(30)	Location ENG Description (not code) from Common Codes
Attendance	O	Numeric #####0	Total attendance (do not send if unknown)

### Element: Competition /Officials /Official (1,N)

Attribute	M/O	Value	Description
Code	M	S(20) with no leading zeroes	Official's code
Function	M	<a href="#">CC @ResultsFunction</a>	Official's function. Can be different from the function sent in the DT_PARTIC message.
Order	M	Numeric #0	Send by order for each official.
Bib	O	Numeric #0	Jersey number. Applies only to on-ice officials (referees, linespersons)



Element: Competition /Officials /Official /Description (1,1)			
Attribute	M/O	Value	Description
GivenName	O	S(25)	Given name in WNPA format (mixed case)
FamilyName	M	S(25)	Family name in WNPA format (mixed case)
Gender	M	<a href="#">CC @PersonGender</a>	Gender of the official
Organisation	M	<a href="#">CC @Organisation</a>	Official's organisation
IFld	O	S(16)	International Federation ID

Element: Competition /Periods (0,1)			
Attribute	M/O	Value	Description
Home	M	S(20) with no leading zeroes	Home Competitor ID
Away	M	S(20) with no leading zeroes	Away Competitor ID

Element: Competition /Periods /Period (1,N)			
Attribute	M/O	Value	Description
Code	M	<a href="#">SC @Period</a>	Period. Only send periods which are complete or have started.
HomeScore	M	Numeric #0	Overall score of the home competitor at the end of the period indicated at @Code
AwayScore	M	Numeric #0	Overall score of the away competitor at the end of the period indicated at @Code
HomePeriodScore	M	Numeric #0	Score of the home competitor just for the period indicated at @Code
AwayPeriodScore	M	Numeric #0	Score of the away competitor just for the period indicated at @Code

Element: Competition /Periods /Period /ExtendedPeriods /ExtendedPeriod (1,N)			
Type	Code	Pos	Description
EP	PSS_HOME	N/A	Element Expected: Always for Period/Code = PSS
	<b>Attribute</b>	<b>M/O</b>	<b>Value</b>
	Value	M	Numeric #0
			Home result for a PSS period. For example, in a PSS, if the home team scores 4 times and wins the PSS, the home score will be 1, and the PSS_HOME will be 4.
EP	PSS_AWAY	N/A	Element Expected: Always for Period/Code = PSS
	<b>Attribute</b>	<b>M/O</b>	<b>Value</b>
	Value	M	Numeric
			Away result for a PSS period.



			#0	For example, in a PSS, if the away team scores 4 times and wins the PSS, the away score will be 1, and the PSS_AWAY will be 4.
--	--	--	----	--

### Sample (Periods)

```
<Period Code="P3" HomeScore="5" AwayScore="5" HomePeriodScore="0" AwayPeriodScore="1">
<Period Code="PSS" HomeScore="5" AwayScore="6" HomePeriodScore="0" AwayPeriodScore="1">
  <ExtendedPeriods>
    <ExtendedPeriod Type="EP" Code="PSS_HOME" Value="2" />
    <ExtendedPeriod Type="EP" Code="PSS_AWAY" Value="4" />
  </ExtendedPeriods>
</Period>
```

### Element: Competition /Result (1,N)

For each Event Unit Results message, there must be at least one competitor with a result element in the event unit.

Attribute	M/O	Value	Description
Result	O	S(2)	The score of the competitor in the event unit In the case of a forfeit: If @IRM is FORFEIT for both teams (Forfeit of the two teams) the Result should be '*', to indicate the both teams lost by '5 - 0'. However, if @IRM is FORFEIT (for just one of the teams), Result will be numeric, as if it were Score.
IRM	O	<a href="#">SC @IRM</a>	The invalid rank mark, in case it is assigned
WLT	O	<a href="#">SC @WLT</a>	The code whether a competitor won or lost
SortOrder	M	Numeric	This attribute is a sequential number with the order of the Home team (1) and the Away team (2)
StartSortOrder	M	Numeric	Same @SortOrder
ResultType	O	<a href="#">SC @ResultType</a>	Type of the @Result attribute.

### Sample (IRMs - Forfeit)

```
<Result Result="0" ResultType="IRM_POINTS" IRM="FORFEIT" WLT="L" SortOrder="1" StartSortOrder="1" >
```

### Sample (IRMs - Double Forfeit)

```
Result Result="*" ResultType="IRM" IRM="FORFEIT" WLT="L" SortOrder="1" StartSortOrder="1"
```

### Element: Competition /Result /Competitor (1,1)

Competitor related to the result of one event unit.

Attribute	M/O	Value	Description
Code	M	S(20) with no leading zeroes or <a href="#">SC @CompetitorPlace</a>	Competitor's ID or TBD in case that the competitor is unknown at this time but will be available BYE (for a bye) is sent when there is no competitor (and will not come later)



Type	M	S(1)	T for team
Organisation	O	<a href="#">CC @Organisation</a>	Competitor's organisation

**Element: Competition /Result /Competitor /Description (0,1)**

Attribute	M/O	Value	Description
TeamName	M	S(73)	Name of the team

**Element: Competition /Result /Competitor /Coaches /Coach (1,N)**

**Competitor's Coach**

Attribute	M/O	Value	Description
Code	M	S(20) with no leading zeroes	ID of the team official
Order	M	Numeric #0	Send order for coaches/team officials, sequential number. Send one Head Coach, one Assistant and the Team Leader.
Function	M	<a href="#">CC @ResultsFunction</a>	Official's function

**Element: Competition /Result /Competitor /Coaches /Coach /Description (1,1)**

Attribute	M/O	Value	Description
GivenName	O	S(25)	Given name in WNPA format (mixed case)
FamilyName	M	S(25)	Family name in WNPA format (mixed case)
Gender	M	<a href="#">CC @PersonGender</a>	Gender of the official
Nationality	M	<a href="#">CC @Country</a>	Coach's nationality

**Element: Competition /Result /Competitor /EventUnitEntry (0,N)**

Type	Code	Pos	Description
EUE	HOME_AWAY	N/A	Element Expected: When available
	<b>Attribute</b>	<b>M/O</b>	<b>Value</b>
	Value	M	<a href="#">SC @Home</a>
EUE	UNIFORM	Numeric 0	Pos Description: Value for the uniform matching the Pos value from ENTRY/UNIFORM in DT_PARTIC_TEAMS for this colour. Element Expected: If available
	<b>Attribute</b>	<b>M/O</b>	<b>Value</b>
	Value	M	S(25)
			Uniform colour of the team

**Sample (Team Entries)**



```
<EventUnitEntry Type="EUE" Code="HOME_AWAY" Value="AWAY" />
<EventUnitEntry Type="EUE" Code="UNIFORM" Pos="1" Value="White"/>
```

Element: Competition /Result /Competitor /StatsItems /StatsItem (1,N)				
Type	Code	Pos	Description	
ST	GF	SC @Period	Pos Description: Period or TOT (for total) Element Expected: Always for TOT if the game has started, always for a period if the period has started.	
	<b>Attribute</b>	<b>M/O</b>	<b>Value</b>	<b>Description</b>
	Value	M	Numeric #0	Goals for
	Attempt	M	Numeric #0	Total Shots
ST	SOG	SC @Period	Pos Description: Period or TOT (for total) Element Expected: Always for TOT if the game has started, always for a period if the period has started.	
	<b>Attribute</b>	<b>M/O</b>	<b>Value</b>	<b>Description</b>
	Value	M	Numeric #0	Shots on Goal
ST	GF_TOURN	S(3)	Pos Description: TOT for Total Element Expected: Always, if the information is available	
	<b>Attribute</b>	<b>M/O</b>	<b>Value</b>	<b>Description</b>
	Value	M	Numeric ##0	Number of goals in the whole tournament
ST	ASSIST	SC @Period	Pos Description: Period or TOT (for total) Element Expected: Always for TOT if the game has started, always for a period if the period has started.	
	<b>Attribute</b>	<b>M/O</b>	<b>Value</b>	<b>Description</b>
	Value	M	Numeric #0	Number of assists
ST	ASSIST_TOURN	S(3)	Pos Description: TOT for Total Element Expected: Always, if the information is available	
	<b>Attribute</b>	<b>M/O</b>	<b>Value</b>	<b>Description</b>
	Value	M	Numeric ##0	Number of assists in the whole tournament
ST	SVS	SC @Period	Pos Description: Period or TOT (for total) Element Expected: Always for TOT if the game has started, always for a period if the period has started.	



	Attribute	M/O	Value	Description
	Value	M	Numeric #0	Total saves
	Percent	M	Numeric ##0.00	Percentage of saves of total SOG
ST		PTY	SC @Period	Pos Description: Period or TOT (for total) Element Expected: Always for TOT if the game has started, always for a period if the period has started.
	Attribute	M/O	Value	Description
	Value	M	Numeric #0	Number of penalties
ST		PIM	SC @Period	Pos Description: Period or TOT (for total) Element Expected: Always for TOT if the game has started, always for a period if the period has started.
	Attribute	M/O	Value	Description
	Value	M	Numeric ##0	Penalties in minutes
ST		PIM_TOURN	S(3)	Pos Description: TOT for Total Element Expected: Always, if the information is available
	Attribute	M/O	Value	Description
	Value	M	Numeric ##0	Penalties in minutes in the tournament
ST		PTS	SC @Period	Pos Description: Period or TOT (for total) Element Expected: Always for TOT if the game has started, always for a period if the period has started.
	Attribute	M/O	Value	Description
	Value	M	Numeric #0	Points
ST		PTS_TOURN	S(3)	Pos Description: TOT for Total Element Expected: Always, if the information is available
	Attribute	M/O	Value	Description
	Value	M	Numeric ##0	Points in the tournament
ST		SHG	SC @Period	Pos Description: Period or TOT (for total) Element Expected: Always for TOT if the game has started, always for a period if the period has started.
	Attribute	M/O	Value	Description
	Value	M	Numeric #0	Shorthanded goals





ST		PK	SC @Period	Pos Description: Period or TOT (for total) Element Expected: Always for TOT if the game has started, always for a period if the period has started.
	<b>Attribute</b>	<b>M/O</b>	<b>Value</b>	<b>Description</b>
	Value	M	Numeric ##0.00	Penalty killing percentage
ST		TPP	SC @Period	Pos Description: Period or TOT (for total) Element Expected: Always for TOT if the game has started, always for a period if the period has started.
	<b>Attribute</b>	<b>M/O</b>	<b>Value</b>	<b>Description</b>
	Value	M	mm:ss	Time in power play Do not remove leading zero minutes
ST		PPG	SC @Period	Pos Description: Period or TOT (for total) Element Expected: Always for TOT if the game has started, always for a period if the period has started.
	<b>Attribute</b>	<b>M/O</b>	<b>Value</b>	<b>Description</b>
	Value	M	Numeric #0	Power play goals.
	Percent	M	Numeric ##0.00	Power play eff. as percentage.
ST		PPN	SC @Period	Pos Description: Period or TOT (for total) Element Expected: Always for TOT if the game has started, always for a period if the period has started.
	<b>Attribute</b>	<b>M/O</b>	<b>Value</b>	<b>Description</b>
	Value	M	Numeric #0	Power play Situations.
ST		TOUT	N/A	Element Expected: Always, if the information is available
	<b>Attribute</b>	<b>M/O</b>	<b>Value</b>	<b>Description</b>
	Value	M	Numeric #0	Total number of time outs taken.
ST		FO	SC @Period	Pos Description: Period or TOT (for total) Element Expected: Always for TOT if the game has started, always for a period if the period has started.
	<b>Attribute</b>	<b>M/O</b>	<b>Value</b>	<b>Description</b>
	Value	M	Numeric #0	Face-offs won
	Percent	M	Numeric ##0.00	Face-offs won percent
<b>Sub Element: Competition /Result /Competitor /StatsItems /StatsItem /ExtendedStat Expected Always, if the information is available</b>				



Attribute	Value	Description	
Code	LOST		
Pos	N/A		
Value	Numeric #0	Face-offs lost	
<b>Sub Element: Competition /Result /Competitor /StatsItems /StatsItem /ExtendedStat Expected Always, if the information is available</b>			
Attribute	Value	Description	
Code	PLUS_MINUS		
Pos	N/A		
Value	Numeric [+/-]#0 or 0	Face-offs net	
ST	SSG SSP SPG	SC @Period	Pos Description: Period or TOT (for total) Element Expected: Always for TOT if the game has started, always for a period if the period has started.
Attribute	M/O	Value	Description
Value	M	Numeric #0	Value of the stat for the team. (SSG=Shots saved by Goalkeeper, SSP=Shots saved by player, SPG=Shots past goal)

### Sample (Team Stats)

```
<StatsItems>
<StatsItem Type="ST" Code="PTS" Pos="P1" Value="1" />
<StatsItem Type="ST" Code="GF" Pos="P1" Value="1" />
<StatsItem Type="ST" Code="ASSIST" Pos="P1" Value="0" />
<StatsItem Type="ST" Code="PTY" Pos="P1" Value="0" />
<StatsItem Type="ST" Code="SHG" Pos="P1" Value="0" />
<StatsItem Type="ST" Code="PK" Pos="P1" Value="0.00" />
<StatsItem Type="ST" Code="PPG" Pos="P1" Value="0" Percent="0.00" />
<StatsItem Type="ST" Code="PIM" Pos="P1" Value="0" />
<StatsItem Type="ST" Code="TPP" Pos="P1" Value="04:00" />
<StatsItem Type="ST" Code="FO" Pos="P1" Value="3" Percent="60.00" >
<ExtendedStat Code="LOST" Value="2" />
<ExtendedStat Code="PLUS_MINUS" Value="+1" />
</StatsItem>
```

Element: Competition /Result /Competitor /Composition /Athlete (0,N)			
Attribute	M/O	Value	Description
Code	M	S(20) with no leading zeroes	Athlete ID
Order	M	Numeric #0	Before the unit starts it is the same as StartSortOrder. After start order the players as in ORIS Game Summary and not dressed at the bottom.
StartSortOrder	M	Numeric #0	Order the players should appear in the Line-Up (Goalkeeper by number, Assignment followed by position followed by jersey



			number) Not dressed at the bottom. If line-up not available, then order by ORIS Game Roster.
Bib	O	S(2)	Athlete's Jersey number.

**Element: Competition /Result /Competitor /Composition /Athlete /Description (1,1)**

**Athletes extended information.**

Attribute	M/O	Value	Description
GivenName	O	S(25)	Given name in WNPA format (mixed case)
FamilyName	M	S(25)	Family name in WNPA format (mixed case)
Gender	M	<a href="#">CC @PersonGender</a>	Gender of the athlete
Organisation	M	<a href="#">CC @Organisation</a>	Athletes' organisation
BirthDate	O	Date	Birth date (example: YYYY-MM-DD). Must include if the data is available
IFId	O	S(16)	International Federation ID
Class	O	<a href="#">CC @DisplineClass</a>	Code to identify the sport class in the case of events with athletes with a disability (e.g: Paralympic Games).

**Element: Competition /Result /Competitor /Composition /Athlete /EventUnitEntry (0,N)**

Type	Code	Pos	Description
EUE	POSITION	N/A	Element Expected: When available
	<b>Attribute</b>	<b>M/O</b>	<b>Value</b>
	Value	M	<a href="#">CC @Position</a> Position of the player in the team.
EUE	ASSIGNMENT	N/A	Element Expected: When available
	<b>Attribute</b>	<b>M/O</b>	<b>Value</b>
	Value	M	<a href="#">SC @Assignment</a> Line in the line-up
EUE	STATUS	N/A	Element Expected: If applicable
	<b>Attribute</b>	<b>M/O</b>	<b>Value</b>
	Value	M	<a href="#">SC @AthleteStatus</a> Send code is applicable
EUE	STARTER	N/A	Element Expected: If available
	<b>Attribute</b>	<b>M/O</b>	<b>Value</b>
	Value	M	S(1) Indicator of starting players. Send Y in case the athlete is starting else do not send
EUE	STARTING_POSITION	N/A	Element Expected: Send in case the athlete is starting.
	<b>Attribute</b>	<b>M/O</b>	<b>Value</b>
	Value	M	S(2) S1..S6 as shown on ORIS C54C.
EUE	GRAPH_LINEUP	Numeric 0	Pos Description: 0-4 for each graphic line with 0 for goalkeepers, 1 to 4 for 1st to 4th Lines



				respectively. Element Expected: Send in case the athlete is starting.
	Attribute	M/O	Value	Description
	Value	M	S(1)	Send position of the athlete within the Line specified as Pos. 1 is the player on the left of the Graph, 2 is the player on the right, 3 is for the player on the left, 4 for the player in the middle, 5 for the player on the right within the Line For Goalkeeper line 1 is for starting GK, 2 is for the second GK.
EUE		HAND	N/A	Element Expected: When available
	Attribute	M/O	Value	Description
	Value	M	<a href="#">SC @Hand</a>	Handedness of the player
EUE		CAPTAIN	N/A	Element Expected: When this information is known
	Attribute	M/O	Value	Description
	Value	M	S(1)	Send Y in case of the athlete is a/the captain else do not send
EUE		CAPTAIN_AST	N/A	Element Expected: Send just for the assistant captain(s) (when this information is known)
	Attribute	M/O	Value	Description
	Value	M	S(1)	Send Y in case of the athlete is the assistant captain else do not send

### Sample (Athlete Entries)

```
<Athlete Code="1135320" Order="2" Bib="27" StartSortOrder="2" >
<Description GivenName="John" FamilyName="Smith" Gender="M" Organisation="SUI" BirthDate="1992-12-15" />
<EventUnitEntry Type="ENTRY" Code="POSITION" Value="D" />
<EventUnitEntry Type="ENTRY" Code="ASSIGNMENT" Value="1" />
<EventUnitEntry Type="ENTRY" Code="STARTER" Value="Y" />
<EventUnitEntry Type="ENTRY" Code="HAND" Value="R" />
```

Element: Competition /Result /Competitor /Composition /Athlete /StatsItems /StatsItem (1,N)				
	Type	Code	Pos	Description
ST		GF	SC @Period	Pos Description: Period or TOT (for total) Element Expected: Always for TOT if the game has started, always for a period if the period has started.
	Attribute	M/O	Value	Description
	Value	M	Numeric #0	Goals for
	Attempt	M	Numeric	Total shots



			#0	
ST		SOG	SC @Period	Pos Description: Period or TOT (for total) Element Expected: Always for TOT if the game has started, always for a period if the period has started.
	<b>Attribute</b>	<b>M/O</b>	<b>Value</b>	<b>Description</b>
	Value	M	Numeric #0	Shots on Goal
ST		GF_TOURN	S(3)	Pos Description: TOT for Total Element Expected: Always if not zero
	<b>Attribute</b>	<b>M/O</b>	<b>Value</b>	<b>Description</b>
	Value	M	Numeric ##0	Number of goals in the whole tournament
ST		GA	S(3)	Pos Description: TOT for Total Element Expected: Always for TOT for the GK if the game has started and this GK has any minutes.
	<b>Attribute</b>	<b>M/O</b>	<b>Value</b>	<b>Description</b>
	Value	M	Numeric #0	Goals against GK
ST		GA_TOURN	S(3)	Pos Description: TOT for Total Element Expected: Always if not zero for GK
	<b>Attribute</b>	<b>M/O</b>	<b>Value</b>	<b>Description</b>
	Value	M	Numeric ##0	Number of goals against in the whole tournament
ST		ASSIST	S(3)	Pos Description: TOT for Total Element Expected: Always for TOT if the game has started.
	<b>Attribute</b>	<b>M/O</b>	<b>Value</b>	<b>Description</b>
	Value	M	Numeric #0	Number of assists
ST		ASSIST_TOURN	S(3)	Pos Description: TOT for Total Element Expected: Always if not zero
	<b>Attribute</b>	<b>M/O</b>	<b>Value</b>	<b>Description</b>
	Value	M	Numeric ##0	Number of assists in the whole tournament
ST		SVS	SC @Period	Pos Description: Period or TOT (for total) Element Expected: Always for TOT if the game has started, always for a period if the period has started and the GK has minutes.



	Attribute	M/O	Value	Description
	Value	M	Numeric #0	Total saves
	Attempt	M	Numeric #0	Shots on goal against goalkeeper
	Percent	M	Numeric ##0.00	Percentage of saves of total SOG
ST		SVS_TOURN	S(3)	Pos Description: TOT for Total Element Expected: Always if not zero
	Attribute	M/O	Value	Description
	Value	M	Numeric ##0	Saves in the tournament
	Attempt	M	Numeric ##0	Shots on goal against goalkeeper in the tournament.
ST		PTY	S(3)	Pos Description: TOT for Total Element Expected: Always for TOT if the game has started.
	Attribute	M/O	Value	Description
	Value	M	Numeric #0	Number of penalties
ST		PIM	S(3)	Pos Description: TOT for Total Element Expected: Always for TOT if the game has started.
	Attribute	M/O	Value	Description
	Value	M	Numeric ##0	Penalties in minutes
ST		PIM_TOURN	S(3)	Pos Description: TOT for Total Element Expected: Always if not zero
	Attribute	M/O	Value	Description
	Value	M	Numeric ##0	Penalties in minutes in the tournament
ST		PLUS_MINUS	S(3)	Pos Description: TOT for Total Element Expected: Always for TOT if the game has started.
	Attribute	M/O	Value	Description
	Value	M	Numeric [+/-]#0 or 0	Net plus / minus
ST		MINS	SC @Period	Pos Description: Period or TOT (for total) Element Expected: Always for TOT if the game has started.
	Attribute	M/O	Value	Description
	Value	M	mm:ss	Time on ice. Do not send leading 0 in



				minutes.
	Avg	M	m:ss	Average time per shift (only for TOT)
ST		SHIFTS	S(3)	Pos Description: TOT for Total Element Expected: Always for TOT if the game has started.
	<b>Attribute</b>	<b>M/O</b>	<b>Value</b>	<b>Description</b>
	Value	M	Numeric ##0	Total number of shifts
ST		PTS	S(3)	Pos Description: TOT for Total Element Expected: Always for TOT if the game has started.
	<b>Attribute</b>	<b>M/O</b>	<b>Value</b>	<b>Description</b>
	Value	M	Numeric #0	Points
ST		PTS_TOURN	S(3)	Pos Description: TOT for Total Element Expected: Always if not zero
	<b>Attribute</b>	<b>M/O</b>	<b>Value</b>	<b>Description</b>
	Value	M	Numeric ##0	Points in the tournament.
ST		FO	S(3)	Pos Description: TOT for Total Element Expected: Always for TOT if the game has started.
	<b>Attribute</b>	<b>M/O</b>	<b>Value</b>	<b>Description</b>
	Value	M	Numeric #0	Face-offs won
	Percent	M	Numeric ##0.00	Face-offs won percent.
<b>Sub Element: Competition /Result /Competitor /Composition /Athlete /StatsItems /StatsItem /ExtendedStat Expected Always, if the information is available.</b>				
	<b>Attribute</b>	<b>Value</b>	<b>Description</b>	
	Code	LOST		
	Pos	N/A		
	Value	Numeric #0	Face-offs lost.	
<b>Sub Element: Competition /Result /Competitor /Composition /Athlete /StatsItems /StatsItem /ExtendedStat Expected Always, if the information is available.</b>				
	<b>Attribute</b>	<b>Value</b>	<b>Description</b>	
	Code	PLUS_MINUS		
	Pos	N/A		
	Value	Numeric [+/-]#0 or 0	Face-offs net.	

### Sample (Player Stats)



```
<StatsItems>
  <StatsItem Type="ST" Code="PIM" Pos="TOT" Value="2" />
  <StatsItem Type="ST" Code="PIM_TOURN" Pos="TOT" Value="8" />
  <StatsItem Type="ST" Code="GF" Pos="P1" Attempt="2" />
  <StatsItem Type="ST" Code="GF" Pos="P2" Value="1" Attempt="1" />
  <StatsItem Type="ST" Code="GF" Pos="P3" Attempt="3" />
  <StatsItem Type="ST" Code="GF" Pos="TOT" Value="1" Attempt="6" />
  <StatsItem Type="ST" Code="GF_TOURN" Pos="TOT" Value="3" />
  <StatsItem Type="ST" Code="PLUS_MINUS" Pos="TOT" Value="+1" />
  <StatsItem Type="ST" Code="MINS" Pos="TOT" Value="14:53" Avg="0:55" />
  <StatsItem Type="ST" Code="SHIFTS" Pos="TOT" Value="16" />
  <StatsItem Type="ST" Code="FO" Pos="TOT" Value="5" Percent="60.00" >
    <ExtendedStat Code="LOST" Value="2" />
    <ExtendedStat Code="PLUS_MINUS" Value="+1" />
  </StatsItem>
</StatsItems>
```

### 2.3.4.6 Message Sort

Sort by Result @SortOrder





## 2.3.5 Current Information

### 2.3.5.1 Description

The Current message is a message containing the current information for a competition which is live. The message is used to send the latest applicable information and in some sports with a running clock, also the clock information.

### 2.3.5.2 Header Values

The following table describes the message header attributes.

Attribute	Value	Comment
CompetitionCode	<a href="#">CC @Competition</a>	Unique ID for competition
DocumentCode	<a href="#">CC @Unit</a>	Full RSC of the unit (game)
DocumentSubcode	N/A	N/A
DocumentType	DT_CURRENT	Current message
DocumentSubtype	N/A	N/A
Version	1..V	Version number associated to the message's content. Ascending number
FeedFlag	"P"-Production "T"-Test	Test message or production message.
Date	Date	Date when the message is generated, expressed in the local time zone where the message was produced.
Time	Time	Time up to milliseconds when the message is generated, expressed in the local time zone where the message was produced.
LogicalDate	Date	Logical Date of events. This is the same as the physical day except when the unit or message transmission extends after midnight. See full explanation in ODF Foundation.
Source	<a href="#">SC @Source</a>	Code indicating the system which generated the message.

### 2.3.5.3 Trigger and Frequency

Please, follow the general definition, taking also into account the following:

- \* At the start and end of every period (to start/stop clock).
- \* Immediately after every change in the score.
- \* Every time the clock starts and stops
- \* During play i.e. after start and not during breaks in play, every 30 seconds after the last DT\_CURRENT message when there is no other activity triggering this message.

### 2.3.5.4 Message Structure

The following table defines the structure of the message.

Level 1	Level 2	Level 3	Level 4
<a href="#">Competition (0.1)</a>			
	Gen		
	Sport		



	Codes		
	<a href="#">Clock (0,1)</a>	Period	
		Time	
		Running	
	<a href="#">Result (0,N)</a>	Result	
		SortOrder	
		StartSortOrder	
		ResultType	
		<a href="#">Competitor (1,N)</a>	
		Code	
		Type	
		Organisation	

### 2.3.5.5 Message Values

Element: Competition (0,1)			
Attribute	M/O	Value	Description
Gen	O	S(20)	Version of the General Data Dictionary applicable to the message
Sport	O	S(20)	Version of the Sport Data Dictionary applicable to the message
Codes	O	S(20)	Version of the Codes applicable to the message

Element: Competition /Clock (0,1)			
Clock Information			
Attribute	M/O	Value	Description
Period	O	<a href="#">SC @Period</a>	Current Period if the information is available automatically from the timing device.
Time	M	m:ss	Value of the clock
Running	M	S(1)	Indicates if the clock is currently running. Y to indicate the clock is running, N to indicate the clock is stopped.

Element: Competition /Result (0,N)			
Attribute	M/O	Value	Description
Result	O	String	Score for the team at the time of the message.
SortOrder	M	Numeric	This attribute is a sequential number with the order of the First named (1) and the Visitor (2)
StartSortOrder	M	Numeric	Same @StartOrder
ResultType	M	<a href="#">SC @ResultType</a>	Type of the @Result attribute. Result type, either points or IRM with points for the



			corresponding event unit
--	--	--	--------------------------

Element: Competition /Result /Competitor (1,N)			
Competitor related to the result of one event unit.			
Attribute	M/O	Value	Description
Code	M	S(20) with no leading zeroes	Competitor's ID
Type	M	S(1)	T for team
Organisation	M	<a href="#">CC @Organisation</a>	Competitor's organisation

### 2.3.5.6 Message Sort

Sort by Result @SortOrder.



## 2.3.6 Play by Play

### 2.3.6.1 Description

The Play by Play is a message containing official raw data from the results provider for each action.

The message contains a generic definition that can be used to provide results data of different nature as well as all of the actions in a unit.

### 2.3.6.2 Header Values

The following table describes the message header attributes.

Attribute	Value	Comment
CompetitionCode	<a href="#">CC @Competition</a>	Unique ID for competition
DocumentCode	<a href="#">CC @Unit</a>	Full RSC of the unit (game)
DocumentSubcode	S(3)	During the match the period code is included, and data is for one period only (P1, P2, P3, OT or OT1.. and PSS)  Is sent as START_LIST then the DocumentSubcode= P1  After the match the message is sent without DocumentSubcode and includes all data for the match.
DocumentType	DT_PLAY_BY_PLAY	Play by Play message
DocumentSubtype	S(8)	Send "ACTION"
Version	1..V	Version number associated to the message's content. Ascending number
ResultStatus	<a href="#">CC @ResultStatus</a>	Status of the message. Possible values are: START_LIST (only used if there are actions before the start) LIVE (used during the competition when nothing else applies) INTERMEDIATE OFFICIAL (when results official)
FeedFlag	"P"-Production "T"-Test	Test message or production message.
Date	Date	Date when the message is generated, expressed in the local time zone where the message was produced.
Time	Time	Time up to milliseconds when the message is generated, expressed in the local time zone where the message was produced.
LogicalDate	Date	Logical Date of events. This is the same as the physical day except when the unit or message transmission extends after midnight. See full explanation in ODF Foundation.
Source	<a href="#">SC @Source</a>	Code indicating the system which generated the message.

### 2.3.6.3 Trigger and Frequency

This message is sent:

- \* Send as START\_LIST when the DT\_RESULT/START\_LIST is sent
- \* After every action (LIVE). Current period only. Include DocumentSubcode.
- \* After each period and any later updates (INTERMEDIATE). Include DocumentSubcode.
- \* After the unit with all periods included (OFFICIAL) [without DocumentSubcode]




\* At any time to correct/complete the data (for example a penalty finishing in the next period), ResultStatus and DocumentSubcode as appropriate.

### 2.3.6.4 Message Structure

The following table defines the structure of the message.

Level 1	Level 2	Level 3	Level 4	Level 5	Level 6	Level 7	Level 8
<a href="#">Competition (0.1)</a>							
	Gen						
	Sport						
	Codes						
	<a href="#">ExtendedInfos (0.1)</a>						
		<a href="#">ExtendedInfo (0.N)</a>					
			Type				
			Code				
			Pos				
			Value				
		<a href="#">SportDescription (0.1)</a>					
			DisciplineName				
			EventName				
			SubEventName				
			Gender				
			UnitNum				
		<a href="#">VenueDescription (0.1)</a>					
			Venue				
			VenueName				
			Location				
			LocationName				
	<a href="#">Actions (0.1)</a>						
		Home					
		Away					
		<a href="#">Action (1.N)</a>					
			Id				
			Period				
			Order				
			Action				
			ActionAdd				
			ActionDesc				
			When				
			Result				
			ScoreH				

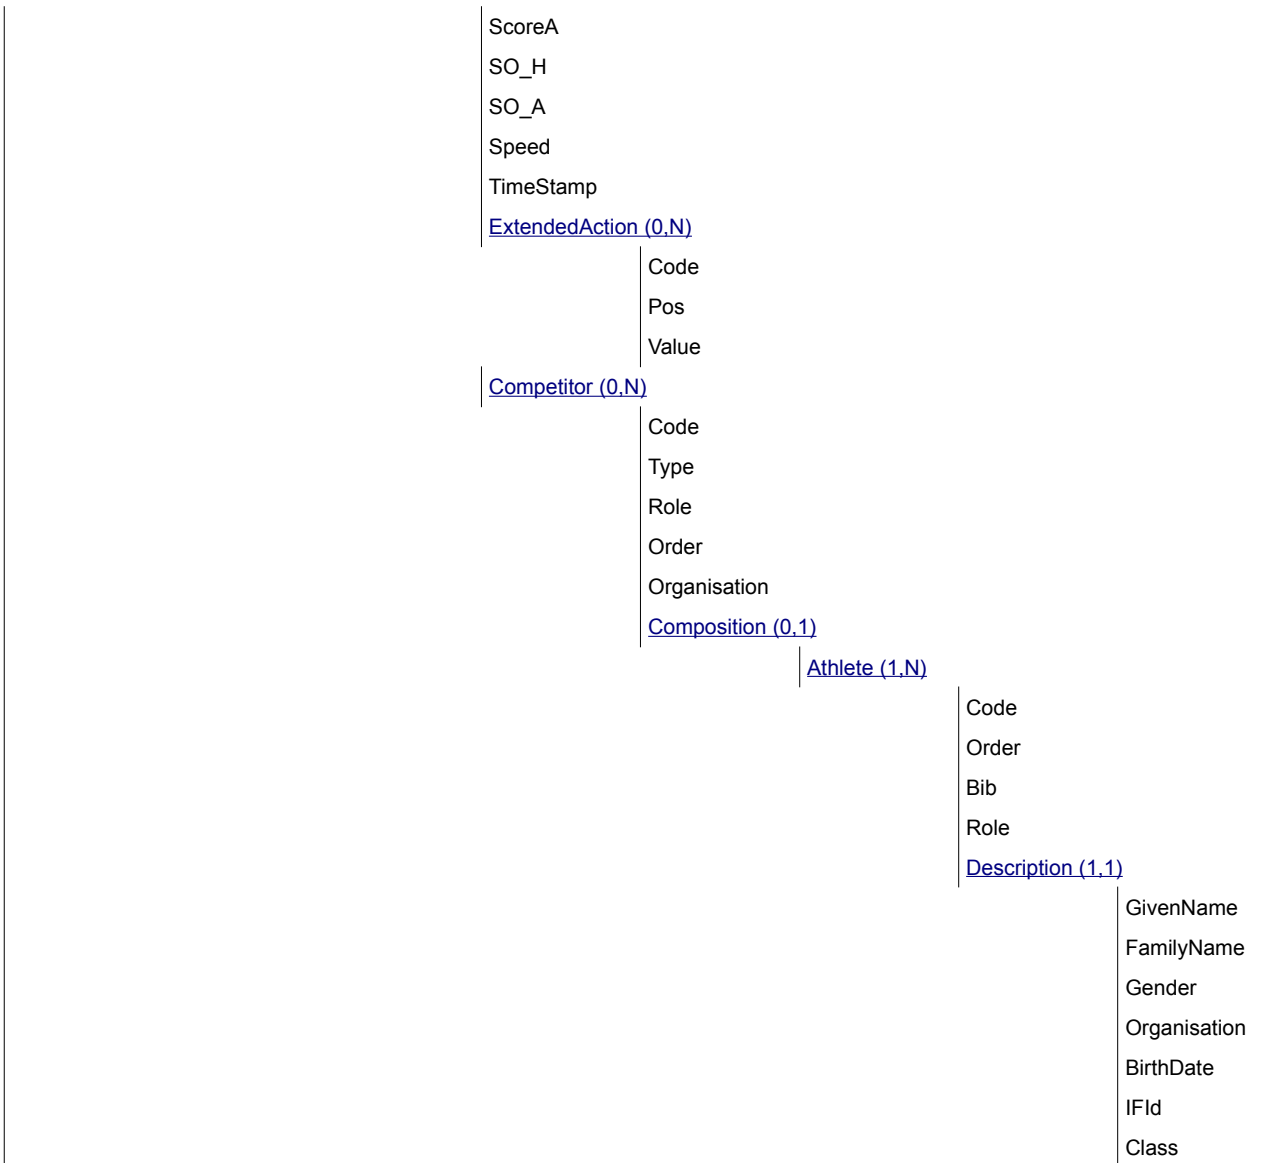

### 2.3.6.5 Message Values

Element: Competition (0,1)			
Attribute	M/O	Value	Description
Gen	O	S(20)	Version of the General Data Dictionary applicable to the message
Sport	O	S(20)	Version of the Sport Data Dictionary applicable to the message
Codes	O	S(20)	Version of the Codes applicable to the message

#### Element: Competition /ExtendedInfos /ExtendedInfo (0,N)



Type	Code	Pos	Description
UI	OT	Numeric 0	Pos Description: 1..n Element Expected: Send for every OT started or played in the game.
<b>Attribute</b>	<b>M/O</b>	<b>Value</b>	<b>Description</b>
Value	M	<a href="#">SC @Period</a>	Send the applicable OT code
<b>Sub Element: Competition /ExtendedInfos /ExtendedInfo /Extension Expected Always</b>			
<b>Attribute</b>	<b>Value</b>	<b>Description</b>	
Code	MAX_TIME		
Pos	N/A		
Value	Numeric #0	Length of OT in minutes	

**Element: Competition /ExtendedInfos /SportDescription (0,1)**

Attribute	M/O	Value	Description
DisciplineName	M	S(40)	Discipline ENG Description (not code) from Common Codes
EventName	M	S(40)	Event ENG Description (not code) from Common Codes.
SubEventName	M	S(40)	EventUnit ENG Description (not code) from Common Codes
Gender	M	CC @SportGender	Gender code for the event unit
UnitNum	O	S(6)	Game number

**Element: Competition /ExtendedInfos /VenueDescription (0,1)**

Attribute	M/O	Value	Description
Venue	M	<a href="#">CC @VenueCode</a>	Venue Code
VenueName	M	S(25)	Venue ENG Description (not code) from Common Codes
Location	M	<a href="#">CC @Location</a>	Location code
LocationName	M	S(30)	Location ENG Description (not code) from Common Codes

**Element: Competition /Actions (0,1)**

Attribute	M/O	Value	Description
Home	M	S(20) with no leading zeroes	Home Competitor ID
Away	M	S(20) with no leading zeroes	Away Competitor ID

**Element: Competition /Actions /Action (1,N)**

Attribute	M/O	Value	Description
Id	M	S(36)	Unique identifier for the action within the message



Period	M	<a href="#">SC @Period</a>	Send one period code
Order	M	Numeric ##0	Unique sequential number for all the actions in the unit, from 1 to n (from the first action the last one considering all periods).
Action	M	<a href="#">SC @Action</a>	Actions in the game. Send one action code The first action of each period should always be "STARTP" and the last "ENDP"
ActionAdd	O	SC @PenaltyDesc or SC @PS_Desc	Send SC @PenaltyDesc in the case of a penalty Send SC @PS_Desc in the case of a penalty shot. Send the code only.
ActionDesc	O	S(200)	Extended action description where Action and ActionAdd are not sufficient. One typical use is when are penalty is served later. In this case send something like 'start serving at mm:ss'.
When	M	mm:ss	Time in the match when the action occurred. First period starts at '00:00', second period at '20:00', third period at '40:00', and OT (if necessary) at '60:00'. If Period PSS is after a 5-minute overtime, time will be '65:00', if it is after a 10-minute overtime, '70:00'. For Paralympics where a period lasts 15 minutes. First period starts at '00:00', second period at '15:00', third period at '30:00', and OT (if necessary) at '45:00'. If Period PSS is after a 5-minute overtime, time will be '50:00', if it is after a 10-minute overtime, '55:00', if it is after a 20-minute overtime, '65:00'.
Result	O	S(10)	Result of the Action for the player/team If Action = GOAL use SC @ResActionGoal If Action = P use SC @ResActionPenalty
ScoreH	O	Numeric #0	Home Score of the game after the action. Send if there is a score change for either team.
ScoreA	O	Numeric #0	Away Score of the game after the action. Send if there is a score change for either team.
SO_H	O	Numeric #0	Home team score in shoot-out (to break tie)
SO_A	O	Numeric #0	Away team score in shoot-out (to break tie)
Speed	O	Numeric ##0	Shot speed in km/h for successful goal.
TimeStamp	O	DateTime	Time of the action (for alignment to video)

**Element: Competition /Actions /Action /ExtendedAction (0,N)**

Type		Code	Pos	Description
		PTY_END	N/A	Element Expected: If applicable for penalties
Attribute	M/O	Value	Description	
Value	M	mm:ss	Penalty end time. First period starts at '00:00', second period at '20:00', third period at '40:00', and OT (if necessary) at '60:00' For Paralympics where a period lasts 15 minutes. Penalty end time. First period starts at '00:00', second period at '15:00', third period at '30:00', and OT (if necessary) at '45:00'	





		PTY_END_PERIOD	N/A	Element Expected: If applicable for penalties
	<b>Attribute</b>	<b>M/O</b>	<b>Value</b>	<b>Description</b>
	Value	M	<a href="#">SC @Period</a>	Penalty end time period. Send only if the end time period is different from the penalty time period. (e.g: Penalty time = '19:50' and End Time = '21:50'. Then PTY_END_PERIOD = P2)
		PTY_TYPE_PS	N/A	Element Expected: If applicable for penalties
	<b>Attribute</b>	<b>M/O</b>	<b>Value</b>	<b>Description</b>
	Value	M	S(1)	Send Y in the case of a penalty shot else do not send.
		PTY_TYPE_AG	N/A	Element Expected: If applicable for penalties
	<b>Attribute</b>	<b>M/O</b>	<b>Value</b>	<b>Description</b>
	Value	M	S(1)	Send Y in the case of a penalty leads to an Awarded Goal else do not send.
		PTY_TEAM	N/A	Element Expected: If applicable for penalties
	<b>Attribute</b>	<b>M/O</b>	<b>Value</b>	<b>Description</b>
	Value	M	S(1)	Send Y in the case of a team penalty else do not send.
		GOAL_UNASSISTED	N/A	Element Expected: If applicable for goals
	<b>Attribute</b>	<b>M/O</b>	<b>Value</b>	<b>Description</b>
	Value	M	S(1)	Send Y if the goal is unassisted else do not send
		PSS_NUM	N/A	Element Expected: For PSS
	<b>Attribute</b>	<b>M/O</b>	<b>Value</b>	<b>Description</b>
	Value	M	Numeric #0	Send the shot number in case of PSS.
		PSS_EXTRA	N/A	Element Expected: When extra shots are required in the penalty shoot-out. The regular number of shots is 3 at preliminaries and 5 at play-off round.
	<b>Attribute</b>	<b>M/O</b>	<b>Value</b>	<b>Description</b>
	Value	M	S(1)	Send Y if extra shots are required in the penalty shootout.
		LAST_PSS	N/A	Element Expected: For PSS
	<b>Attribute</b>	<b>M/O</b>	<b>Value</b>	<b>Description</b>
	Value	M	S(1)	Send Y if the unit action is the last PSS shot during the current PSS period else do not send.

Element: Competition /Actions /Action /Competitor (0,N)



Competitor participating in the Action. Used when the Action is related to a competitor.			
Attribute	M/O	Value	Description
Code	M	S(20) with no leading zeroes	Competitor's ID
Type	M	S(1)	T for team
Role	O	<a href="#">SC @ActionRole</a>	Role of the team in the action if it was a team action.
Order	O	Numeric	Order in which the competitor should appear for the action, if there is more than one competitor. Send 1 if only one.
Organisation	M	<a href="#">CC @Organisation</a>	Competitors' organisation

Element: Competition /Actions /Action /Competitor /Composition /Athlete (1,N)			
Attribute	M/O	Value	Description
Code	M	S(20) with no leading zeroes	Athlete's ID of the athlete related to the action
Order	O	Numeric	Order of the athletes. Used to order the athletes related to the action.
Bib	O	S(2)	Jersey Number
Role	O	<a href="#">SC @ActionRole</a>	Role of the athlete in the action

Element: Competition /Actions /Action /Competitor /Composition /Athlete /Description (1,1)			
Athletes extended information			
Attribute	M/O	Value	Description
GivenName	O	S(25)	Given name in WNPA format (mixed case)
FamilyName	M	S(25)	Family name in WNPA format (mixed case)
Gender	M	<a href="#">CC @PersonGender</a>	Gender of the athlete
Organisation	M	<a href="#">CC @Organisation</a>	Athletes' organisation
BirthDate	O	Date	Birth date (example: YYYY-MM-DD). Must include if the data is available
IFId	O	S(16)	International Federation ID
Class	O	<a href="#">CC @DisciplineClass</a>	Code to identify the sport class in the case of events with athletes with a disability (e.g: Paralympic Games).

### Sample (Play by Play)



```
<Actions Home="IHOWTEAM6---USA01" Away="IHOWTEAM6---FIN01" >
.....
<Action Id="123456" Period="P1" Order="2" Action="GK" When="00:00" >
  <Competitor Code="IHOWTEAM6---FIN01" Type="T" Order="1" Organisation="FIN" >
    <Composition>
      <Athlete Code="2032496" Role="IN" Bib="14" Order="1" >
        <Description GivenName="John" FamilyName="Smith" Gender="M" Organisation="FIN" BirthDate="1994-12-15" />
      </Athlete>
    </Composition>
  </Competitor>
</Action>
<Action Id="123123" Period="P1" Order="3" Action="GOAL" When="00:53" Result="EQ" ScoreH="1" ScoreA="0">
  <ExtendedAction Code="GOAL_UNASSISTED" Value="Y" />
  <Competitor Code="IHOWTEAM6---USA01" Type="T" Order="1" Organisation="USA" >
    <Composition>
      <Athlete Code="2021026" Role="SCR" Bib="22" Order="1" >
        <Description GivenName="Harry" FamilyName="Jones" Gender="M" Organisation="USA" BirthDate="1993-12-15" />
      </Athlete>
    </Composition>
  </Competitor>
</Action>
<Action Id="111111" Period="P1" Order="4" Action="P" When="01:22" Result="2" ActionAdd="HOOK">
  <ExtendedAction Type="EA" Code="PTY_END" Value="03:22" />
  <Competitor Code="IHOWTEAM6---FIN01" Type="T" Order="1" Organisation="FIN" >
    <Composition>
      <Athlete Code="2032484" Bib="32" Order="1" >
        <Description GivenName="John" FamilyName="Brown" Gender="M" Organisation="FIN" BirthDate="1992-12-15" />
      </Athlete>
    </Composition>
  </Competitor>
</Action>
```

### 2.3.6.6 Message Sort

Actions /Action @Order.



## 2.3.7 Image

### 2.3.7.1 Description

The 'Image message' is a message containing an image or images file(s) in .png format (for uniforms) encapsulated in a XML message.

In this sport it is used to send the images of the team uniforms.

### 2.3.7.2 Header Values

The following table describes the message header attributes.

Attribute	Value	Comment
CompetitionCode	<a href="#">CC @Competition</a>	Unique ID for competition
DocumentCode	<a href="#">CC @Discipline</a>	Full RSC at discipline level
DocumentSubcode	S(34)	Competitor ID of the team, for example HBLMTEAM7---CAN01
DocumentType	DT_IMAGE	Image message
DocumentSubtype	S(20)	Send UNIFORM
Version	1.V	Version number associated to the message's content. Ascending number
ResultStatus	<a href="#">CC @ResultStatus</a>	Only applicable status is OFFICIAL
FeedFlag	"P"-Production "T"-Test	Test message or production message.
Date	Date	Date when the message is generated, expressed in the local time zone where the message was produced.
Time	Time	Time up to milliseconds when the message is generated, expressed in the local time zone where the message was produced.
LogicalDate	Date	Logical Date of events. This is the same as the physical day except when the unit or message transmission extends after midnight. See full explanation in ODF Foundation.
Source	<a href="#">SC @Source</a>	Code indicating the system which generated the message.

### 2.3.7.3 Trigger and Frequency

Trigger when available and after any change.

### 2.3.7.4 Message Structure

The following table defines the structure of the message.

Level 1	Level 2	Level 3	Level 4
<a href="#">Competition (0.1)</a>	Gen Sport Codes		
	<a href="#">Image (1.N)</a>		Pos



Version	
Revision	
ImageType	
<a href="#">ImageData (1.1)</a>	
-	

### 2.3.7.5 Message Values

Element: Competition (0,1)			
Attribute	M/O	Value	Description
Gen	O	S(20)	Version of the General Data Dictionary applicable to the message
Sport	O	S(20)	Version of the Sport Data Dictionary applicable to the message
Codes	O	S(20)	Version of the Codes applicable to the message

Element: Competition /Image (1,N)			
Attribute	M/O	Value	Description
Pos	M	Numeric #0	Used as the differentiator for multiple images in the message. It is used for each uniform included. NOTE: The values used here MUST match the Pos values used in DT_PARTIC_TEAMS Team /Discipline /RegisteredEvent /EventEntry @ENTRY/UNIFORM so the colour description and image are aligned.
Version	M	Numeric #0	Document Version
Revision	M	Numeric #0	Document Revision
ImageType	M	S(3)	Image type extension, use png

Element: Competition /Image /ImageData (1,1)			
Attribute	M/O	Value	Description
-	M	Free Text	The ImageData element has a body consisting of one Base64-encoded report (a png file)

#### Sample (Uniform)

```
<Image Pos="1" Version="1" Revision="0" ImageType="png" >
  <ImageData>/9j/4AAQSkZJRgABAQEAAAAAAAAA ETC ETC Lj5OXm5+jp6vHy8/T+uit//2Q==</ImageData>
</Image>
<Image Pos="2" Version="1" Revision="0" ImageType="png" >
  <ImageData>/9j/4AAddddRgABAQEAAAAAAAAA ETC ETC Lj5OXm5+jp6vHy8/T+uit//2Q==</ImageData>
</Image>
```

### 2.3.7.6 Message Sort

Sort by Competition /Image /Pos.



International  
Olympic  
Committee

WOG-2022-IHO-1.2 APP



## 2.3.8 Pool Standings

### 2.3.8.1 Description

The pool standings message contains the standings of a group in a competition.

This report is sent independently for each of the groups / pools of the competition in a particular phase, and the group / pool can be determined from the message header (DocumentCode).

### 2.3.8.2 Header Values

The following table describes the message header attributes.

Attribute	Value	Comment
CompetitionCode	<a href="#">CC @Competition</a>	Unique ID for competition
DocumentCode	<a href="#">CC @Phase</a>	Full RSC for the phase (pool/group) For example IHOMTEAM6-----GPA----- for Men's Preliminary Round - Group A or IHOMTEAM6-----PREL----- for the combined group
DocumentSubcode	N/A	N/A
DocumentType	DT_POOL_STANDING	Pool Standings message
DocumentSubtype	N/A	N/A
Version	1..V	Version number associated to the message's content. Ascending number
ResultStatus	<a href="#">CC @ResultStatus</a>	Status of the message. Expected statuses are: START_LIST (before any unit is complete) INTERMEDIATE (during the phase) OFFICIAL (after all matches official)
FeedFlag	"P"-Production "T"-Test	Test message or production message.
Date	Date	Date when the message is generated, expressed in the local time zone where the message was produced.
Time	Time	Time up to milliseconds when the message is generated, expressed in the local time zone where the message was produced.
LogicalDate	Date	Logical Date of events. This is the same as the physical day except when the unit or message transmission extends after midnight. See full explanation in ODF Foundation.
Source	<a href="#">SC @Source</a>	Code indicating the system which generated the message.

### 2.3.8.3 Trigger and Frequency

- \* Before the start of the competition to build the initial tables. The message has status START\_LIST
- \* When an event unit of the corresponding phase finishes. The message has status INTERMEDIATE.
- \* When the phase finishes (there are no more event units/games to compete). The message has status OFFICIAL
- \* Trigger on any changes.

### 2.3.8.4 Message Structure

The following table defines the structure of the message.



Level 1	Level 2	Level 3	Level 4	Level 5	Level 6
<a href="#">Competition (0.1)</a>	Gen Sport Codes				
	<a href="#">ExtendedInfos (0.1)</a>	<a href="#">ExtendedInfo (0,N)</a>	Code Pos Value		
		<a href="#">Progress (0.1)</a>	LastUnit UnitsTotal UnitsComplete		
		<a href="#">SportDescription (0.1)</a>	DisciplineName EventName SubEventName Gender		
	<a href="#">Result (1.N)</a>	Rank RankEqual ResultType Result IRM SortOrder Won Lost Played For Against Diff			
		<a href="#">ExtendedResults (0.1)</a>	<a href="#">ExtendedResult (1,N)</a>	Type Code Pos Value	
		<a href="#">Competitor (1.1)</a>			





	Code	
	Type	
	Organisation	
	<a href="#">Description (0.1)</a>	
	<a href="#">Opponent (0.N)</a>	TeamName
		Code
		Type
		Pos
		Organisation
		Date
		Time
		Unit
		HomeAway
		Result
		<a href="#">Description (0.1)</a>
		TeamName

### 2.3.8.5 Message Values

Element: Competition (0,1)			
Attribute	M/O	Value	Description
Gen	O	S(20)	Version of the General Data Dictionary applicable to the message
Sport	O	S(20)	Version of the Sport Data Dictionary applicable to the message
Codes	O	S(20)	Version of the Codes applicable to the message

Element: Competition /ExtendedInfos /ExtendedInfo (0,N)			
Type	Code	Pos	Description
UI	QUAL_RULE	N/A	Element Expected: Always
	<b>Attribute</b>	<b>M/O</b>	<b>Value</b>
	Value	M	SC @QualRule
			<b>Description</b>
			Send the code for the qualification rule.

Element: Competition /ExtendedInfos /Progress (0,1)			
Attribute	M/O	Value	Description
LastUnit	O	<a href="#">CC @Unit</a>	Send the full RSC of the most recent unit information included in this message.
UnitsTotal	O	Numeric ##0	Total number of units (games) to be played in the pool included in the message.
UnitsComplete	O	Numeric ##0	Total number of units (games) which are included in this message.



Element: Competition /ExtendedInfos /SportDescription (0,1)			
Sport Descriptions in Text.			
Attribute	M/O	Value	Description
DisciplineName	M	S(40)	Discipline ENG Description (not code) from Common Codes
EventName	M	S(40)	Event ENG Description (not code) from Common Codes.
SubEventName	M	S(40)	Phase ENG Description (not code) from Common Codes
Gender	M	CC @SportGender	Gender code for the event unit

Element: Competition /Result (1,N)			
For any message, there should be at least one competitor being awarded a result for the pool.			
Attribute	M/O	Value	Description
Rank	O	S(2)	Rank in the group. For Group D send with trailing D. (2D etc.).
RankEqual	O	S(1)	Send "Y" if the Rank is equalled else do not send.
ResultType	M	<a href="#">SC @ResultType</a>	Result type, POINTS or IRM.
Result	O	Numeric #0	Send the classification points a team has accrued during the pool stage.
IRM	O	<a href="#">SC @IRM</a>	The invalid rank mark if applicable.
SortOrder	M	Numeric #0	This attribute is a sequential number with the order of the results for the group, if they were to be presented. It is mostly based on the rank, but it should be used to sort out disqualified teams and before the competition starts.
Won	O	Numeric #0	Number of games won by the team in the group in regulation time. Overtime wins are captured in the ExtendedResult.
Lost	O	Numeric #0	Number of games lost by the team in the group in regulation time. Overtime losses are captured in the ExtendedResult.
Played	O	Numeric #0	Number of games played by the team in the group.
For	O	Numeric #0	Total number of goals for.
Against	O	Numeric #0	Total number of goals against.
Diff	O	Numeric [+/-]##0 or 0	Points difference, between for and against. Send + or - unless value is 0.

Element: Competition /Result /ExtendedResults /ExtendedResult (1,N)			
Type	Code	Pos	Description
ER	OTW	N/A	Element Expected: Always after the first match
	<b>Attribute</b>	<b>M/O</b>	<b>Value</b>
	Value	M	Numeric #0
ER	OTL	N/A	Element Expected:



Attribute	M/O	Value	Description
Value	M	Numeric #0	Overtime losses by the competitor.
ER	SEED	N/A	Element Expected: Send only for the whole preliminary round message.
Attribute	M/O	Value	Description
Value	M	Numeric #0	Team Seed
ER	SUB_RANK	N/A	Element Expected: Only in the combined ranking
Attribute	M/O	Value	Description
Value	M	S(5)	Rank of the team with their pool

**Element: Competition /Result /Competitor (1,1)**

Attribute	M/O	Value	Description
Code	M	S(20) with no leading zeroes	Competitor's ID
Type	M	S(1)	T for team
Organisation	M	<a href="#">CC @Organisation</a>	Competitor's organisation

**Element: Competition /Result /Competitor /Description (0,1)**

**Competitors extended information.**

Attribute	M/O	Value	Description
TeamName	M	S(73)	Name of the team.

**Element: Competition /Result /Competitor /Opponent (0,N)**

**Details of the opposing competitor in competitions within the pool. (The Opponent of the competitor in the Opponent @Pos column of the Pool)**

Attribute	M/O	Value	Description
Code	M	S(20) with no leading zeroes	Competitor ID or TBD if unknown
Type	M	S(1)	T for team
Pos	M	Numeric #0	1 to n. Normally expected to be the same as Result/SortOrder for the same competitor.
Organisation	M	<a href="#">CC @Organisation</a>	Competitor's organisation (code).
Date	M	Date	Date of match between the competitor and opponent (example: YYYY-MM-DD). Send even after the match is complete.
Time	O	S(5)	Time of match (example HH:MM) Must include if the data is available, send even after the match is complete.
Unit	M	<a href="#">CC @Unit</a>	Full RSC of the Unit for the Pool Item
HomeAway	O	S(1)	Home / Away indicator. Send H if the opponent is the home team, send A if the opponent is the away team.



Result	O	S(50)	Result of the match if match is complete and formatted as in ORIS (separator & order, example 5-2). Must include if the data is available and the match is complete. The order of the result data is relative to the competitor and may be reversed for other competitor or depending on home/away display rules.
--------	---	-------	---

**Element: Competition /Result /Competitor /Opponent /Description (0,1)**

**Competitors extended information.**

Attribute	M/O	Value	Description
TeamName	M	S(73)	Name of the opposition team.

**Sample (Pool Standings)**

```
<Result Rank="1" SortOrder="1" ResultType="POINTS" Result="3" Played="1" Won="1" Lost="0" For="5" Against="0" Diff="+5" >
<Competitor Code="IHOWTEAM6---CAN01" Type="T" Organisation="CAN" >
  <Description TeamName="Canada"/>
  <ExtendedResults>
    <ExtendedResult Type="ER" Code="OTW" Value="0" />
    <ExtendedResult Type="ER" Code="OTL" Value="0" />
  </ExtendedResults>
  <Opponent Code="IHOWTEAM6---USA01" Type="T" Pos="1" Organisation="USA" Date="2018-02-06" Time="14:00"
Unit="IHOWTEAM6-----GPA-0001----" HomeAway="H" Result="5-0">
    <Description TeamName="United States"/>
  </Opponent>
  <Opponent Code="IHOWTEAM6---BLR01" Type="T" Pos="2" Organisation="BLR" Date="2018-02-08" Time="09:00"
Unit="IHOWTEAM6-----GPA-0003----" HomeAway="A" >
    <Description TeamName="Belarus"/>
  </Opponent>
  <Opponent Code="IHOWTEAM6---NZL01" Type="T" Pos="4" Organisation="NZL" Date="2018-02-10" Time="19:00"
Unit="IHOWTEAM6-----GPA-0005----" HomeAway="H" >
    <Description TeamName="New Zealand"/>
  </Opponent>
</Competitor>
</Result>
```

**2.3.8.6 Message Sort**

The attribute used to sort the results is Result @SortOrder.



## 2.3.9 Brackets

### 2.3.9.1 Description

The brackets message contains the brackets information for one particular event. It is used in events where there is a necessity to know in advance how successive event units will be filled as the competition progresses. In the early stages of the competition, it indicates how each of the event units will be built from the winners/losers, or other competition rules of the previous event units.

### 2.3.9.2 Header Values

The following table describes the message header attributes.

Attribute	Value	Comment
CompetitionCode	<a href="#">CC @Competition</a>	Unique ID for competition
DocumentCode	<a href="#">CC @Event</a>	Full RSC of the Event
DocumentType	DT_BRACKETS	Brackets message
Version	1..V	Version number associated to the message's content. Ascending number
ResultStatus	<a href="#">CC @ResultStatus</a>	Status of the message. Expected statuses are: START_LIST (before any unit is complete) INTERMEDIATE (during the competition) OFFICIAL (when all matches official)
FeedFlag	"P"-Production "T"-Test	Test message or production message.
Date	Date	Date when the message is generated, expressed in the local time zone where the message was produced.
Time	Time	Time up to milliseconds when the message is generated, expressed in the local time zone where the message was produced.
LogicalDate	Date	Logical Date of events. This is the same as the physical day except when the unit or message transmission extends after midnight. See full explanation in ODF Foundation.
Source	<a href="#">SC @Source</a>	Code indicating the system which generated the message.


### 2.3.9.3 Trigger and Frequency

- \* Before the competition (START\_LIST) including only the known phases.
- \* After each phase is complete with the information for the next phase (INTERMEDIATE)
- \* After every match during final phases (INTERMEDIATE) to add result information
- \* After the final match (OFFICIAL)
- \* Trigger after any change

### 2.3.9.4 Message Structure

The following table defines the structure of the message.

Level 1	Level 2	Level 3	Level 4	Level 5	Level 6	Level 7	Level 8
<a href="#">Competition (0.1)</a>							
	Gen						
	Sport						

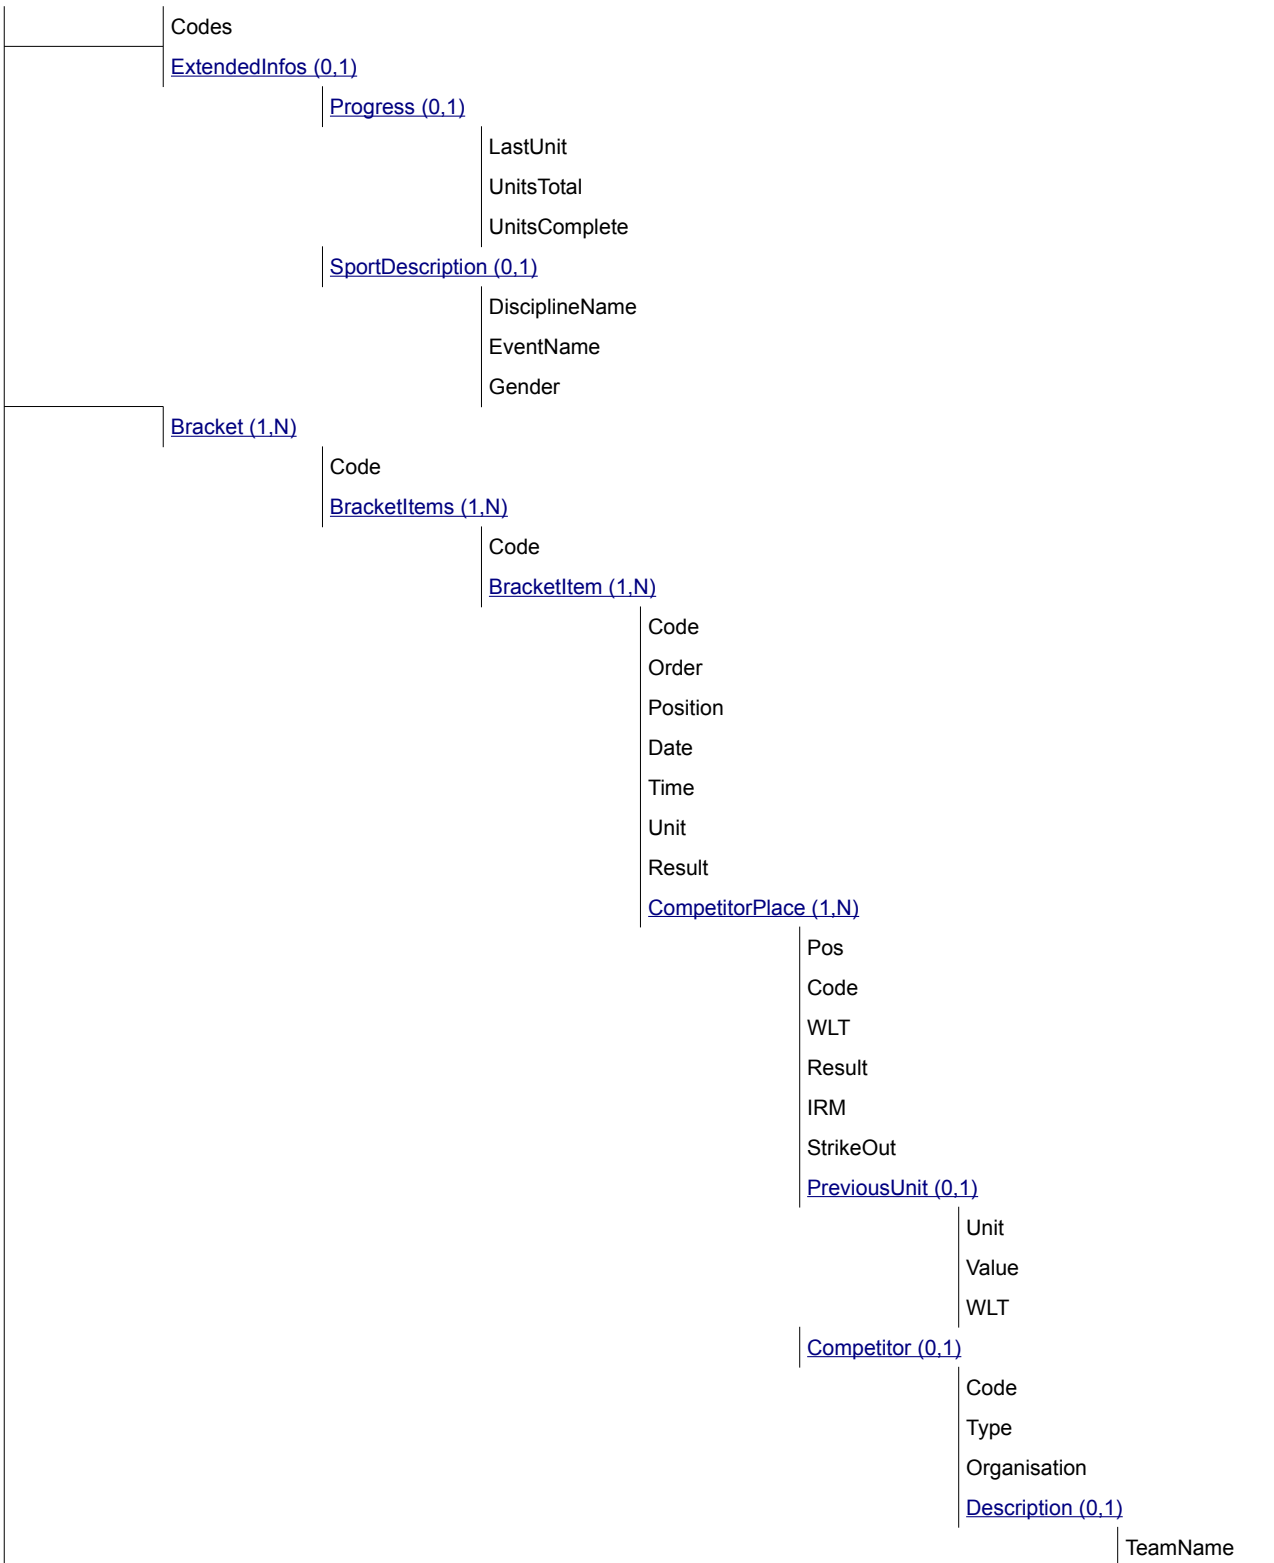



### 2.3.9.5 Message Values

Element: Competition (0,1)			
Attribute	M/O	Value	Description
Gen	O	S(20)	Version of the General Data Dictionary applicable to the message
Sport	O	S(20)	Version of the Sport Data Dictionary applicable to the message
Codes	O	S(20)	Version of the Codes applicable to the message

Element: Competition /ExtendedInfos /Progress (0,1)			
Attribute	M/O	Value	Description
LastUnit	O	<a href="#">CC @Unit</a>	Send the full RSC of the most recently completed unit in the event.
UnitsTotal	O	Numeric ##0	Total number of units to be played in the event
UnitsComplete	O	Numeric ##0	Total number of units which are official of the UnitsTotal.

Element: Competition /ExtendedInfos /SportDescription (0,1)			
Sport Description in Text			
Attribute	M/O	Value	Description
DisciplineName	M	S(40)	Discipline ENG Description (not code) from Common Codes
EventName	M	S(40)	Event ENG Description (not code) from Common Codes.
Gender	M	<a href="#">CC @SportGender</a>	Gender code for the event

Element: Competition /Bracket (1,N)			
Attribute	M/O	Value	Description
Code	M	<a href="#">SC @Bracket</a>	Bracket code to identify a bracket item. One for each individual bracket as defined in ORIS.

Element: Competition /Bracket /BracketItems (1,N)			
Each BracketItem is only sent when complete for the teams + empty for the first before the start of the competition.			
Attribute	M/O	Value	Description
Code	M	<a href="#">SC @BracketItems</a>	Bracket code to identify a set of bracket items.

Element: Competition /Bracket /BracketItems /BracketItem (1,N)			
Attribute	M/O	Value	Description
Code	M	Numeric #0 or S(3)	The game number for each bracket item (e.g.: 17, 18, 19, 20 ...) when known. Send 'TBD' for to be defined, if the game number is not known.
Order	M	Numeric #0	Sequential number inside of BracketItems to indicate the order, always start at 1
Position	M	Numeric	Bracket position when drawing the bracket. For example a



		#0	quarter final has 4 items, with positions 1, 2, 3 and 4 from the top. Use the appropriate number to draw the position.
Date	O	Date	Date of match (example: YYYY-MM-DD). Must include if the data is available
Time	O	S(5)	HH:MM. Must be filled if known
Unit	O	<a href="#">CC @Unit</a>	Full RSC of the unit for the BracketItem
Result	O	S(50)	Fill when match is complete, filled and formatted for display including OT and PSS if applicable (as in ORIS).

**Element: Competition /Bracket /BracketItems /BracketItem /CompetitorPlace (1,N)**

- If the competitors are known, this element is used to place the competitors in the bracket.

- If they are not yet known, it contains some information (on the rule to access to this bracket...)

Attribute	M/O	Value	Description
Pos	M	Numeric 0	This attribute is a sequential number to place the competitors in the bracket (1 or 2).
Code	O	<a href="#">SC @CompetitorPlace</a>	Sent when there is no competitor team (BYE) or when it is not known yet (TBD).
WLT	O	<a href="#">SC @WLT</a>	W or L, indicates the winner or loser of the bracket item. Always send when known.
Result	O	S(5)	The result (score) of the competitor in the event unit
IRM	O	<a href="#">SC @IRM</a>	The invalid result mark, if applicable
StrikeOut	O	S(1)	If the competitor should be struck out in this bracket item send Y, usually only used for DQB.

**Element: Competition /Bracket /BracketItems /BracketItem /CompetitorPlace /PreviousUnit (0,1)**

Previous event unit related to the [CompetitorPlace@Pos](#) competitor of the current bracket item. It is always informed except for the bracket items whose [CompetitorPlace@Pos](#) competitor do not have preceding event units in the bracket graph unless coming from a pool.

Attribute	M/O	Value	Description
Unit	M	<a href="#">CC @Unit</a>	Full RSC code of the previous event unit for the <a href="#">CompetitorPlace@Pos</a> competitor of the bracket item. Must send if a winner/loser from a single unit. If from a pool then send full RSC of the Pool phase (A, B C etc.).
Value	O	SC@Pool or S(10)	When competitor is not known and is possible to do so: - (and not coming from a pool) send the BracketItem code (game number) to indicate the competitor. - If from a women's pool then the rank in the pool. - If from men's pools for men's then send nD where n is the preliminary rank.
WLT	O	<a href="#">SC @WLT</a>	Send W or L for winner or loser of previous match (if not Pool) do not send if participant is from a pool.

**Element: Competition /Bracket /BracketItems /BracketItem /CompetitorPlace /Competitor (0,1)**

[CompetitorPlace @Pos](#) competitor related to the bracket item. Only include if the competitor is known.

Attribute	M/O	Value	Description
Code	M	S(20) with no leading zeroes	Competitor's ID





Type	M	S(1)	T for team
Organisation	O	<a href="#">CC @Organisation</a>	Competitors' organisation if known.

Element: Competition /Bracket /BracketItems /BracketItem /CompetitorPlace /Competitor /Description (0,1)			
Attribute	M/O	Value	Description
TeamName	M	S(73)	Name of the team.

### Sample (Brackets)

```
<Bracket Code="FNL">
  <BracketItems Code="R16">
    <BracketItem Code="19" Order="1" Position="1" Date="2018-02-07" Time="12:00" Unit="IHOMTEAM6-----"
8FNL000100--" Result="4-2" NextUnit="IHOMTEAM6-----QFNL000100--" >
      <CompetitorPlace Pos="1" WLT="W" Result="4" >
        <Competitor Code="IHOMTEAM6---SLO01" Type="T" Organisation="SLO" >
          <Description TeamName="Slovenia"/>
        </Competitor>
      </CompetitorPlace>
      <CompetitorPlace Pos="2" WLT="L" Result="2" >
        <Competitor Code="IHOMTEAM6---AUT01" Type="T" Organisation="AUT" >
          <Description TeamName="Austria"/>
        </Competitor>
      </CompetitorPlace>
    </BracketItem>
  </BracketItems>
</Bracket>
```

### 2.3.9.6 Message Sort

Bracket @Code order by priority, FNL, BRN etc.

BracketItems @Code should be sorted by qualification, quarterfinals, semifinals etc.



## 2.3.10 Statistics

### 2.3.10.1 Description

The Statistics message contains a list of statistics for a competitor (could be an individual athlete or a team), that applies at a DocumentCode level, which could be for an event unit, a phase or an event.

There will be a separate message (identified by the header's DocumentSubtype and DocumentSubcode) for every table where multiple statistics apply.

### 2.3.10.2 Header Values

The following table describes the message header attributes.

Attribute	Value	Comment
CompetitionCode	<a href="#">CC_@Competition</a>	Unique ID for competition
DocumentCode	<a href="#">CC_@Event</a>	Full event level RSC
DocumentSubcode	S(20)	The DocumentSubcode is the ID of the team in the case the message is for a single team. The DocumentSubcode is used only in case DocumentSubtype is "CUM"
DocumentType	DT_STATS	Statistics message
DocumentSubtype	S(20)	Included to categorize different types of statistics. The following different DocumentSubtype header attributes will apply: * CUM: For cumulative data of individual player statistics and team statistics. There will be one single message for each team. * TOU: For Tournament statistics * IND_RANKING: Ranking of individual statistics. * TEAM_RANKING: Ranking of individual statistics
Version	1..V	Version number associated to the message's content. Ascending number
ResultStatus	<a href="#">CC_@ResultStatus</a>	It indicates whether the result is official or intermediate etc). LIVE (used during the competition when nothing else applies) INTERMEDIATE (used after the competition has started and is not finished but not currently live, typically between units) OFFICIAL (after the last unit which effects the statistics is official)
FeedFlag	"P"-Production "T"-Test	Test message or production message.
Date	Date	Date when the message is generated, expressed in the local time zone where the message was produced.
Time	Time	Time up to milliseconds when the message is generated, expressed in the local time zone where the message was produced.
LogicalDate	Date	Logical Date of events. This is the same as the physical day except when the unit or message transmission extends after midnight. See full explanation in ODF Foundation.
Source	<a href="#">SC_@Source</a>	Code indicating the system which generated the message.

### 2.3.10.3 Trigger and Frequency


After each match according to the general definition. The CUM message is only triggered for the teams involved in the match.



### 2.3.10.4 Message Structure

The following table defines the structure of the message.

Level 1	Level 2	Level 3	Level 4	Level 5	Level 6	Level 7	Level 8
<a href="#">Competition (0.1)</a>							
	Gen						
	Sport						
	Codes						
	<a href="#">ExtendedInfos (0.1)</a>						
		<a href="#">Progress (0.1)</a>					
			LastUnit				
			UnitsTotal				
			UnitsComplete				
		<a href="#">SportDescription (0.1)</a>					
			DisciplineName				
			EventName				
			Gender				
	<a href="#">Stats (1.1)</a>						
		Code					
		<a href="#">StatsItems (0.1)</a>					
			<a href="#">StatsItem (1.N)</a>				
				Type			
				Code			
				Pos			
				Value			
				Avg			
		<a href="#">Competitor (0.N)</a>					
			Code				
			Type				
			Order				
			Organisation				
			<a href="#">Description (0.1)</a>				
				TeamName			
			<a href="#">StatsItems (0.1)</a>				
				<a href="#">StatsItem (1.N)</a>			
				Type			
				Code			
				Pos			
				Value			
				Attempt			

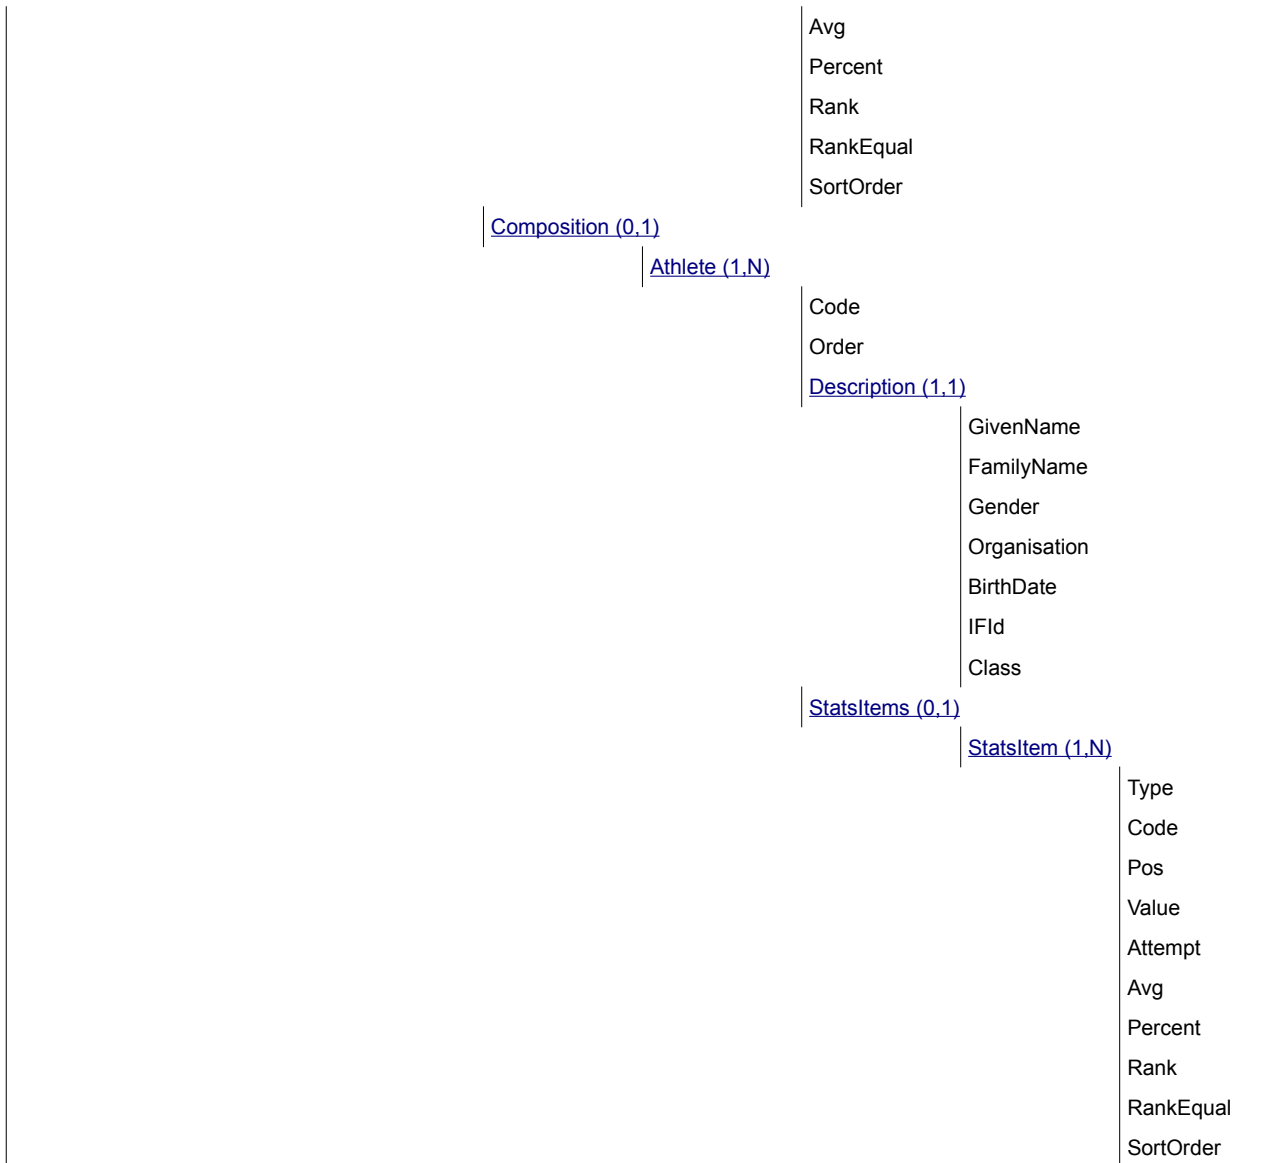

### 2.3.10.5 Message Values

Element: Competition (0,1)			
Attribute	M/O	Value	Description
Gen	O	S(20)	Version of the General Data Dictionary applicable to the message
Sport	O	S(20)	Version of the Sport Data Dictionary applicable to the message
Codes	O	S(20)	Version of the Codes applicable to the message

#### Element: Competition /ExtendedInfos /Progress (0,1)



Attribute	M/O	Value	Description
LastUnit	O	<a href="#">CC @Unit</a>	Send the RSC of the most recently unit made official. For CUM which only includes one team then it is the last unit for that team.
UnitsTotal	O	Numeric ##0	Send the total number of units (games) to be played. For CUM which only includes one team then it is the total units for that team.
UnitsComplete	O	Numeric ##0	Send the total number of units (games) which are official. For CUM which only includes one team then it is the total complete units for that team.

Element: Competition /ExtendedInfos /SportDescription (0,1)			
Sport Description in Text			
Attribute	M/O	Value	Description
DisciplineName	M	S(40)	Discipline ENG Description (not code) from Common Codes
EventName	M	S(40)	Event ENG Description (not code) from Common Codes
Gender	M	<a href="#">CC @SportGender</a>	Gender code for the event unit

Element: Competition /Stats (1,1)			
Attribute	M/O	Value	Description
Code	M	<a href="#">SC @Statistics</a>	A code to identify the statistics being listed.

Element: Competition /Stats /StatsItems /StatsItem (1,N)			
Statistics for the event unit / phase or event - depending on the headers' DocumentCode.			
Type	Code	Pos	Description
ST	ATTENDANCE	N/A	Element Expected: Always send if DocumentSubtype= TOU.
	<b>Attribute</b>	<b>M/O</b>	<b>Value</b>
	Value	M	Numeric #####0
	Avg	M	Numeric #####0
ST	MP	N/A	Element Expected: Always send if DocumentSubtype= TOU.
	<b>Attribute</b>	<b>M/O</b>	<b>Value</b>
	Value	M	Numeric #0

### Sample (TOU)

```
<Stats Code="TOU">
  <StatsItems>
    <StatsItem Type="ST" Code="ATTENDANCE" Value="245200" Avg="8173" />
    <StatsItem Type="ST" Code="MP" Value="30" />
  </StatsItems>
```



Element: Competition /Stats /Competitor (0,N)			
Competitor of the statistics.			
Attribute	M/O	Value	Description
Code	M	S(20) with no leading zeroes	Competitor's ID to be assigned a specific type of statistic.  The competitor should be participating in the event / phase / event unit depending on the DocumentCode in the message's header.
Type	M	S(1)	T for team
Order	M	Numeric ##0	Sort order: For each team: 1 - Team NOC code
Organisation	O	<a href="#">CC @Organisation</a>	Competitor's organisation

Element: Competition /Stats /Competitor /Description (0,1)			
Attribute	M/O	Value	Description
TeamName	M	S(73)	Name of the team. Only applies for teams / groups.

Element: Competition /Stats /Competitor /StatsItems /StatsItem (1,N)				
Type	Code	Pos	Description	
ST	MP	N/A	Element Expected: If available for TEAM_RANKING.	
	<b>Attribute</b>	<b>M/O</b>	<b>Value</b>	<b>Description</b>
	Value	M	Numeric #0	Total games played.
ST	IRM	N/A	Element Expected: If applicable for TEAM_RANKING.	
	<b>Attribute</b>	<b>M/O</b>	<b>Value</b>	<b>Description</b>
	Value	M	<a href="#">SC @IRM</a>	Send DQB if the competitor is disqualified.
ST	GF	N/A	Element Expected: If available for TEAM_RANKING.	
	<b>Attribute</b>	<b>M/O</b>	<b>Value</b>	<b>Description</b>
	Value	M	Numeric ##0	Number of goals for.
	Attempt	M	Numeric ##0	Shots on goal.
	Percent	M	Numeric ##0.00	Scoring efficiency as a percentage.
	Rank	O	S(2)	Send the Rank for display of the scoring efficiency.
	RankEqual	O	S(1)	Identifies if a rank has been equalled. Send Y if applicable else not sent.
	SortOrder	O	Numeric #0	Send the sort order.
<b>Sub Element: Competition /Stats /Competitor /StatsItems /StatsItem /ExtendedStat</b> Expected If available for TEAM_RANKING.				



	Attribute	Value	Description	
	Code	SSG		
	Pos	N/A		
	Value	Numeric ##0	Shots saved by goalkeeper.	
ST		ASSIST	N/A	
			Element Expected: CUM message only	
	Attribute	M/O	Value	Description
	Value	M	Numeric ##0	Number of assists.
ST		PTS	N/A	
				Element Expected: CUM message only
	Attribute	M/O	Value	Description
	Value	M	Numeric ##0	Number of points.
ST		PP	N/A	
				Element Expected: If available for TEAM_RANKING.
	Attribute	M/O	Value	Description
	Value	M	Numeric ##0	Power play goals for.
	Attempt	M	Numeric ##0	Advantage (times on power play).
	Percent	M	Numeric ##0.00	Power Play efficiency as a percentage.
	Rank	O	S(2)	Send the Rank for display of the PP efficiency.
	RankEqual	O	S(1)	Identifies if a rank has been equalled. Send Y if applicable else not sent.
	SortOrder	O	Numeric #0	Send the sort order.
ST		TPP	N/A	
				Element Expected: If available for TEAM_RANKING.
	Attribute	M/O	Value	Description
	Value	M	mm:ss	Time in power play. Do not remove leading zero minutes
	Avg	M	mm:ss	Average time in power play. Do not remove leading zero minutes
ST		PK	N/A	
				Element Expected: If available for TEAM_RANKING.
	Attribute	M/O	Value	Description
	Value	M	Numeric ##0	Power play goals against.
	Attempt	M	Numeric ##0	Disadvantage (number of times shorthanded or power play opportunities against).
	Percent	M	Numeric ##0.00	Penalty killing percentage.
	Rank	O	S(2)	Send the Rank for display of the PK



				percentage.
	RankEqual	O	S(1)	Identifies if a rank has been equalled. Send Y if applicable else not sent.
	SortOrder	O	Numeric #0	Send the sort order.
ST		TSH	N/A	Element Expected: If available for TEAM_RANKING.
	<b>Attribute</b>	<b>M/O</b>	<b>Value</b>	<b>Description</b>
	Value	M	mm:ss	Time shorthanded in minutes and seconds. Do not remove leading zero minutes
	Avg	M	mm:ss	Average time shorthanded in minutes and seconds. Do not remove leading zero minutes
ST		GA	N/A	Element Expected: If available for TEAM_RANKING.
	<b>Attribute</b>	<b>M/O</b>	<b>Value</b>	<b>Description</b>
	Value	M	Numeric ##0	Number of goals against.
ST		GK	N/A	Element Expected: If available for TEAM_RANKING.
	<b>Attribute</b>	<b>M/O</b>	<b>Value</b>	<b>Description</b>
	Value	M	Numeric ##0	Total saves.
	Attempt	M	Numeric ##0	Shots on goal against the goalkeeper.
	Avg	M	Numeric #0.00	Goals against as average per 60 minutes. In Paralympics Goals against as average per 45 minutes.
	Percent	M	Numeric ##0.00	Save percentage (saves as a percentage of SOG).
	Rank	O	S(2)	Send the Rank for display of the percent.
	RankEqual	O	S(1)	Identifies if a rank has been equalled. Send Y if applicable else not sent.
	SortOrder	O	Numeric #0	Send the sort order.
<b>Sub Element: Competition /Stats /Competitor /StatsItems /StatsItem /ExtendedStat Expected If available for TEAM_RANKING.</b>				
	<b>Attribute</b>	<b>Value</b>	<b>Description</b>	
	Code	ENG		
	Pos	N/A		
	Value	Numeric ##0	Empty net goals.	
<b>Sub Element: Competition /Stats /Competitor /StatsItems /StatsItem /ExtendedStat Expected If available for TEAM_RANKING.</b>				
	<b>Attribute</b>	<b>Value</b>	<b>Description</b>	
	Code	SHGA		
	Pos	N/A		





	Value	Numeric #0	Shorthanded goals against.	
<b>Sub Element: Competition /Stats /Competitor /StatsItems /StatsItem /ExtendedStat Expected If available for TEAM_RANKING.</b>				
	<b>Attribute</b>	<b>Value</b>	<b>Description</b>	
	Code	SO		
	Pos	N/A		
	Value	Numeric ##0	Number of shutouts.	
ST		PIM	N/A	Element Expected: If available for TEAM_RANKING.
	<b>Attribute</b>	<b>M/O</b>	<b>Value</b>	<b>Description</b>
	Value	M	Numeric ##0	Total penalties in minutes.
	Avg	M	mm:ss	PIM (average) per game (in minutes and seconds). Remove leading zeros when minutes are 1-9.
	Rank	O	S(2)	Send the Rank for display of the PIM.
	RankEqual	O	S(1)	Identifies if a rank has been equalled. Send Y if applicable else not sent.
	SortOrder	O	Numeric #0	Send the sort order
<b>Sub Element: Competition /Stats /Competitor /StatsItems /StatsItem /ExtendedStat Expected If available for TEAM_RANKING.</b>				
	<b>Attribute</b>	<b>Value</b>	<b>Description</b>	
	Code	10MIN		
	Pos	N/A		
	Value	Numeric ##0	Number of 10 minute penalties.	
<b>Sub Element: Competition /Stats /Competitor /StatsItems /StatsItem /ExtendedStat Expected If available for TEAM_RANKING.</b>				
	<b>Attribute</b>	<b>Value</b>	<b>Description</b>	
	Code	2MIN		
	Pos	N/A		
	Value	Numeric ##0	Number of 2 minute penalties.	
<b>Sub Element: Competition /Stats /Competitor /StatsItems /StatsItem /ExtendedStat Expected If available for TEAM_RANKING.</b>				
	<b>Attribute</b>	<b>Value</b>	<b>Description</b>	
	Code	5MIN		
	Pos	N/A		
	Value	Numeric ##0	Number of 5 minute penalties.	
<b>Sub Element: Competition /Stats /Competitor /StatsItems /StatsItem /ExtendedStat Expected If available for TEAM_RANKING.</b>				
	<b>Attribute</b>	<b>Value</b>	<b>Description</b>	



	Code	GM		
	Pos	N/A		
	Value	Numeric ##0		Number of game misconducts.
<b>Sub Element: Competition /Stats /Competitor /StatsItems /StatsItem /ExtendedStat Expected If available for TEAM_RANKING.</b>				
	<b>Attribute</b>	<b>Value</b>	<b>Description</b>	
	Code	MP		
	Pos	N/A		
	Value	Numeric ##0		Number of match penalties.
ST		SHG_NET	N/A	Element Expected: If available for TEAM_RANKING.
	<b>Attribute</b>	<b>M/O</b>	<b>Value</b>	<b>Description</b>
	Value	M	Numeric [+/-]##0 or 0	SHGF - SHGA
	Rank	O	S(2)	Send the Rank for display of the net SHG.
	RankEqual	O	S(1)	Identifies if a rank has been equalled. Send Y if applicable else not sent.
	SortOrder	O	Numeric #0	Send the sort order.
<b>Sub Element: Competition /Stats /Competitor /StatsItems /StatsItem /ExtendedStat Expected If available for TEAM_RANKING.</b>				
	<b>Attribute</b>	<b>Value</b>	<b>Description</b>	
	Code	SHGA		
	Pos	N/A		
	Value	Numeric ##0		Shorthanded goals against.
<b>Sub Element: Competition /Stats /Competitor /StatsItems /StatsItem /ExtendedStat Expected If available for TEAM_RANKING.</b>				
	<b>Attribute</b>	<b>Value</b>	<b>Description</b>	
	Code	SHGF		
	Pos	N/A		
	Value	Numeric ##0		Shorthanded goals for.
ST		ATTENDANCE	N/A	Element Expected: If available for TEAM_RANKING.
	<b>Attribute</b>	<b>M/O</b>	<b>Value</b>	<b>Description</b>
	Value	M	Numeric #####0	Total attendance for all games played.
	Avg	M	Numeric #####0	Average attendance.
	Rank	O	S(2)	Send the Rank for display of average number of spectators.



RankEqual	O	S(1)	Identifies if a rank has been equalled. Send Y if applicable else not sent.
SortOrder	O	Numeric #0	Send the sort order.

### Sample (Team Ranking)

```
<Stats Code="TEAM_RANKING">
  <Competitor Code="IHOWTEAM6---CAN01" Type="T" Order="1" Organisation="CAN" >
  <Description TeamName="Canada" />
  <StatsItems>
    <StatsItem Type="ST" Code="MP" Value="1" />
    <StatsItem Type="ST" Code="GF" Value="5" Attempt="25" Percent="20.00" Rank="2" SortOrder="2" />
    <StatsItem Type="ST" Code="GA" Value="0" />
    <StatsItem Type="ST" Code="PK" Value="5" Percent="100.00" Attempt="5" Rank="2" SortOrder="2">
      <ExtendedStat Code="TSH" Value="02:00" Avg="02:00" />
    </StatsItem>
    <StatsItem Type="ST" Code="ATTENDANCE" Value="4386" Avg="4386" />
  </StatsItem>
</StatsItem>
```

Element: Competition /Stats /Competitor /Composition /Athlete (1,N)			
Attribute	M/O	Value	Description
Code	M	S(20) with no leading zeroes	Athlete's ID
Order	M	Numeric #0	Sort order

Element: Competition /Stats /Competitor /Composition /Athlete /Description (1,1)			
Attribute	M/O	Value	Description
GivenName	O	S(25)	Given name in WNPA format (mixed case)
FamilyName	M	S(25)	Family name in WNPA format (mixed case)
Gender	M	<a href="#">CC @PersonGender</a>	Gender of the athlete
Organisation	M	<a href="#">CC @Organisation</a>	Athletes' organisation
BirthDate	O	Date	Birth date (example: YYYY-MM-DD). Must include if the data is available
IFId	O	S(16)	International Federation ID
Class	O	<a href="#">CC @DisplineClass</a>	Code to identify the sport class in the case of events with athletes with a disability (e.g: Paralympic Games).

Element: Competition /Stats /Competitor /Composition /Athlete /StatsItems /StatsItem (1,N)			
Type	Code	Pos	Description
ST	POS	N/A	Element Expected: If available in CUM and IND_RANKING.
	<b>Attribute</b>	<b>M/O</b>	<b>Value</b>
	Value	M	<a href="#">CC @Position</a>
ST	MP	N/A	Element Expected:



				If available in CUM and IND_RANKING.
Attribute	M/O	Value	Description	
Value	M	Numeric #0	Total games played. (Dressed for GK)	
<b>Sub Element: Competition /Stats /Competitor /Composition /Athlete /StatsItems /StatsItem /ExtendedStat Expected If available for GK in CUM and IND_RANKING.</b>				
Attribute	Value	Description		
Code	GPI			
Pos	N/A			
Value	Numeric #0	Total games where the GK was on the ice.		
ST	GF	N/A	Element Expected: If available in CUM (not rank etc.) and IND_RANKING.	
Attribute	M/O	Value	Description	
Value	M	Numeric ##0	Number of goals for.	
Attempt	M	Numeric ##0	Total shots	
Percent	O	Numeric ##0.00	Percentage or goals from total shots where Attempts is greater than 0	
Rank	O	S(3)	Send the Rank for display for the scoring ranking (IND_RANKING message).	
RankEqual	O	S(1)	Identifies if a rank has been equalled. Send Y if applicable else not sent.	
SortOrder	O	Numeric ##0	Send the sort order.	
ST	ASSIST	N/A	Element Expected: If available in CUM (not rank etc.) and IND_RANKING.	
Attribute	M/O	Value	Description	
Value	M	Numeric ##0	Number of assists.	
Rank	O	S(3)	Send the Rank for display for the scoring ranking (IND_RANKING message).	
RankEqual	O	S(1)	Identifies if a rank has been equalled. Send Y if applicable else not sent.	
SortOrder	O	Numeric ##0	Send the sort order.	
ST	PTS	N/A	Element Expected: If available in CUM (not rank etc.) and IND_RANKING.	
Attribute	M/O	Value	Description	
Value	M	Numeric ##0	Number of points.	
Rank	O	S(3)	Send the Rank for display for the scoring ranking (IND_RANKING message).	



	RankEqual	O	S(1)	Identifies if a rank has been equalled. Send Y if applicable else not sent.
	SortOrder	O	Numeric ##0	Send the sort order.
ST		PTS_DEF_RANK	N/A	Element Expected: If available in IND_RANKING.
	<b>Attribute</b>	<b>M/O</b>	<b>Value</b>	<b>Description</b>
	Value	M	Numeric ##0	Defensemen leading scorers rank.
ST		PIM	N/A	Element Expected: If available in CUM (not rank etc.) and IND_RANKING.
	<b>Attribute</b>	<b>M/O</b>	<b>Value</b>	<b>Description</b>
	Value	M	Numeric ##0	Penalties in minutes.
	Avg	M	mm:ss	PIM (average) per game (in minutes and seconds). Remove leading zeros when minutes are 1-9.
	Rank	O	S(3)	Send the Rank for display for the scoring ranking (IND_RANKING message).
	RankEqual	O	S(1)	Identifies if a rank has been equalled. Send Y if applicable else not sent.
	SortOrder	O	Numeric ##0	Send the sort order.
<b>Sub Element: Competition /Stats /Competitor /Composition /Athlete /StatsItems /StatsItem /ExtendedStat Expected If available in IND_RANKING.</b>				
	<b>Attribute</b>	<b>Value</b>	<b>Description</b>	
	Code	10MIN		
	Pos	N/A		
	Value	Numeric ##0	Number of 10 minute penalties.	
<b>Sub Element: Competition /Stats /Competitor /Composition /Athlete /StatsItems /StatsItem /ExtendedStat Expected If available in IND_RANKING.</b>				
	<b>Attribute</b>	<b>Value</b>	<b>Description</b>	
	Code	2MIN		
	Pos	N/A		
	Value	Numeric ##0	Number of 2 minute penalties.	
<b>Sub Element: Competition /Stats /Competitor /Composition /Athlete /StatsItems /StatsItem /ExtendedStat Expected If available in IND_RANKING.</b>				
	<b>Attribute</b>	<b>Value</b>	<b>Description</b>	
	Code	5MIN		
	Pos	N/A		
	Value	Numeric ##0	Number of 5 minute penalties.	
<b>Sub Element: Competition /Stats /Competitor /Composition /Athlete /StatsItems /StatsItem /ExtendedStat Expected If available in IND_RANKING.</b>				



Attribute	Value	Description	
Code	GM		
Pos	N/A		
Value	Numeric ##0	Number of game misconducts, gross misconducts.	
<b>Sub Element: Competition /Stats /Competitor /Composition /Athlete /StatsItems /StatsItem /ExtendedStat Expected If available in IND_RANKING.</b>			
Attribute	Value	Description	
Code	MP		
Pos	N/A		
Value	Numeric ##0	Number of match penalties.	
ST	PLUS_MINUS	N/A	Element Expected: If available in CUM (not rank etc.) and IND_RANKING.
Attribute	M/O	Value	Description
Value	M	Numeric [+/-]##0 or 0	Plus / Minus net value.
Rank	O	S(3)	Send the Rank for display for the scoring ranking (IND_RANKING message).
RankEqual	O	S(1)	Identifies if a rank has been equalled. Send Y if applicable else not sent.
SortOrder	O	Numeric ##0	Send the sort order.
<b>Sub Element: Competition /Stats /Competitor /Composition /Athlete /StatsItems /StatsItem /ExtendedStat Expected If available in IND_RANKING.</b>			
Attribute	Value	Description	
Code	MINUS		
Pos	N/A		
Value	Numeric ##0	Total Minus.	
<b>Sub Element: Competition /Stats /Competitor /Composition /Athlete /StatsItems /StatsItem /ExtendedStat Expected If available in IND_RANKING.</b>			
Attribute	Value	Description	
Code	PLUS		
Pos	N/A		
Value	Numeric ##0	Total Plus.	
ST	GWG	N/A	Element Expected: If available in CUM.
Attribute	M/O	Value	Description
Value	M	Numeric ##0	Number of Game Winning Goals.
ST	PPG	N/A	Element Expected:



				If available in CUM and IND_RANKING.
	<b>Attribute</b>	<b>M/O</b>	<b>Value</b>	<b>Description</b>
	Value	M	Numeric ##0	Number of power play goals.
ST		SHG	N/A	Element Expected: If available in CUM and IND_RANKING.
	<b>Attribute</b>	<b>M/O</b>	<b>Value</b>	<b>Description</b>
	Value	M	Numeric ##0	Number of short hand goals.
ST		SOG	N/A	Element Expected: If available in CUM and IND_RANKING.
	<b>Attribute</b>	<b>M/O</b>	<b>Value</b>	<b>Description</b>
	Value	M	Numeric ##0	Number of shots on goal.
ST		MINS	N/A	Element Expected: If available in CUM and IND_RANKING.
	<b>Attribute</b>	<b>M/O</b>	<b>Value</b>	<b>Description</b>
	Value	M	mmm:ss	Total minutes time on ice for skaters. (remove leading zeros)
	Avg	M	mm:ss	Average time on ice for skaters. (per game) (remove leading zeros)
	Rank	O	S(3)	Send the Rank for display (IND_RANKING message).
	RankEqual	O	S(1)	Identifies if a rank has been equalled. Send Y if applicable else not sent.
	SortOrder	O	Numeric ##0	Send the sort order for time on ice
ST		SHIFTS	N/A	Element Expected: If available in CUM.
	<b>Attribute</b>	<b>M/O</b>	<b>Value</b>	<b>Description</b>
	Value	M	Numeric ##0	Total shifts played.
	Avg	M	mm:ss	Average length of each shift
<b>Sub Element: Competition /Stats /Competitor /Composition /Athlete /StatsItems /StatsItem /ExtendedStat Expected If available for IND_RANKING.</b>				
	<b>Attribute</b>	<b>Value</b>	<b>Description</b>	
	Code	SPG		
	Pos	N/A		
	Value	Numeric #0.0	Average shifts per game	
ST		FO	N/A	Element Expected: If available for IND_RANKING.
	<b>Attribute</b>	<b>M/O</b>	<b>Value</b>	<b>Description</b>
	Value	M	Numeric #0	Face-offs won
	Percent	M	Numeric	Face-offs won percent



			##0.00	
	Rank	O	S(3)	Send the Rank for display (IND_RANKING message).
	RankEqual	O	S(1)	Send Y in case of the Rank has been equalled else do not send.
	SortOrder	O	Numeric ##0	Send the sort order.
<b>Sub Element: Competition /Stats /Competitor /Composition /Athlete /StatsItems /StatsItem /ExtendedStat Expected If available for IND_RANKING.</b>				
	<b>Attribute</b>	<b>Value</b>	<b>Description</b>	
	Code	LOST		
	Pos	N/A		
	Value	Numeric #0	Face-offs lost.	
<b>Sub Element: Competition /Stats /Competitor /Composition /Athlete /StatsItems /StatsItem /ExtendedStat Expected If available for IND_RANKING.</b>				
	<b>Attribute</b>	<b>Value</b>	<b>Description</b>	
	Code	PLUS_MINUS		
	Pos	N/A		
	Value	Numeric [+/-]#0 or 0	Face-offs net.	
ST		GK	N/A	Element Expected: If available for GK in CUM (not rank etc.) and IND_RANKING.
	<b>Attribute</b>	<b>M/O</b>	<b>Value</b>	<b>Description</b>
	Value	M	Numeric ##0	Saves by the goalkeeper.
	Attempt	M	Numeric ##0	Shots on goal against the goalkeeper.
	Avg	O	Numeric #0.00	Goals against as average per 60 minutes. In Paralympics Goals against as average per 45 minutes.
	Percent	M	Numeric ##0.00	Save percentage by the goalkeeper.
	Rank	O	S(2)	Send the Rank for display for the GK ranking.
	RankEqual	O	S(1)	Identifies if a rank has been equalled. Send Y if applicable else not sent.
	SortOrder	O	Numeric #0	Send the sort order.
<b>Sub Element: Competition /Stats /Competitor /Composition /Athlete /StatsItems /StatsItem /ExtendedStat Expected If available for CUM and IND_RANKING.</b>				
	<b>Attribute</b>	<b>Value</b>	<b>Description</b>	
	Code	GA		
	Pos	N/A		
	Value	Numeric ##0	Goals against the goalkeeper.	





Sub Element: Competition /Stats /Competitor /Composition /Athlete /StatsItems /StatsItem /ExtendedStat Expected If available for CUM and IND_RANKING.			
Attribute	Value	Description	
Code	SO		
Pos	N/A		
Value	Numeric ##0	Shut outs by the goalkeeper.	
Sub Element: Competition /Stats /Competitor /Composition /Athlete /StatsItems /StatsItem /ExtendedStat Expected If available for CUM and IND_RANKING.			
Attribute	Value	Description	
Code	WON		
Pos	N/A		
Value	Numeric ##0	Games won by the goalkeeper.	
Sub Element: Competition /Stats /Competitor /Composition /Athlete /StatsItems /StatsItem /ExtendedStat Expected If available for CUM and IND_RANKING.			
Attribute	Value	Description	
Code	LOST		
Pos	N/A		
Value	Numeric ##0	Games lost by the goalkeeper.	
Sub Element: Competition /Stats /Competitor /Composition /Athlete /StatsItems /StatsItem /ExtendedStat Expected If available for CUM and IND_RANKING.			
Attribute	Value	Description	
Code	PPGA		
Pos	N/A		
Value	Numeric ##0	Power play goals against the goalkeeper.	
Sub Element: Competition /Stats /Competitor /Composition /Athlete /StatsItems /StatsItem /ExtendedStat Expected If available for CUM and IND_RANKING.			
Attribute	Value	Description	
Code	SHGA		
Pos	N/A		
Value	Numeric ##0	Short handed goals against the goalkeeper.	
ST	GK_MINS	N/A	Element Expected: If available in CUM and IND_RANKING.
Attribute	M/O	Value	Description
Value	M	mmm:ss	Total minutes played for goalkeeper
Avg	M	mm:ss	Average minutes played for goalkeeper
Percent	O	Numeric ##0.00	MIP as percentage (for goalkeepers)

### Sample (IND\_RANKING)



```
<Stats Code="IND_RANKING">
  <Competitor Code="IHOMTEAM6---CAN01" Type="T" Order="1" Organisation="CAN" >
    <Composition>
      <Athlete Code="2018820" Order="2">
        <Description GivenName="John" FamilyName="Smith" Gender="M" Organisation="GER" BirthDate="1994-12-15" />
        <StatsItems>
          <StatsItem Type="ST" Code="MP" Value="3" />
          <StatsItem Type="ST" Code="GF" Value="5" Attempt="50" Percent="10.00" Rank="2" SortOrder="2">
          <StatsItem Type="ST" Code="POS" Value="D" />
          <StatsItem Type="ST" Code="ASSIST" Value="2" Rank="5" RankEqual="Y" SortOrder="7" />
          <StatsItem Type="ST" Code="PIM" Value="2" Avg="1:00" Rank="18" RankEqual="Y" SortOrder="21" />
            <ExtendedStat Code="2MIN" Value="1" />
        </StatsItem>
      </Athlete>
    </Composition>
  </Competitor>
</Stats>
```

### 2.3.10.6 Message Sort

Sort according to the @Order attributes.



## 2.3.11 Event Final Ranking

### 2.3.11.1 Description

The event final ranking is a message containing the final results and ranking at the completion of one particular event.

The final ranking message is a generic message for all sports, including the full event final result for all competitors who were either ranked, got an Invalid Rank Mark (disqualified, etc.), or both.

### 2.3.11.2 Header Values

The following table describes the message header attributes.

Attribute	Value	Comment
CompetitionCode	<a href="#">CC @Competition</a>	Unique ID for competition
DocumentCode	<a href="#">CC @Event</a>	Event Final ranking message
DocumentType	DT_RANKING	Event Final ranking message
Version	1..V	Version number associated to the message's content. Ascending number
ResultStatus	<a href="#">CC @ResultStatus</a>	Result status, indicates whether the data is official or partial. PARTIAL OFFICIAL
FeedFlag	"P"-Production "T"-Test	Test message or production message.
Date	Date	Date when the message is generated, expressed in the local time zone where the message was produced.
Time	Time	Time up to milliseconds when the message is generated, expressed in the local time zone where the message was produced.
LogicalDate	Date	Logical Date of events. This is the same as the physical day except when the unit or message transmission extends after midnight. See full explanation in ODF Foundation.
Source	<a href="#">SC @Source</a>	Code indicating the system which generated the message.

### 2.3.11.3 Trigger and Frequency


This message is only triggered after a unit which affects the final ranking is official and that ranking is not subject to change.

\* After each final position is known (PARTIAL or OFFICIAL).

### 2.3.11.4 Message Structure

The following table defines the structure of the message.

Level 1	Level 2	Level 3	Level 4	Level 5	Level 6	Level 7
<a href="#">Competition (0.1)</a>						
	Gen					
	Sport					
	Codes					

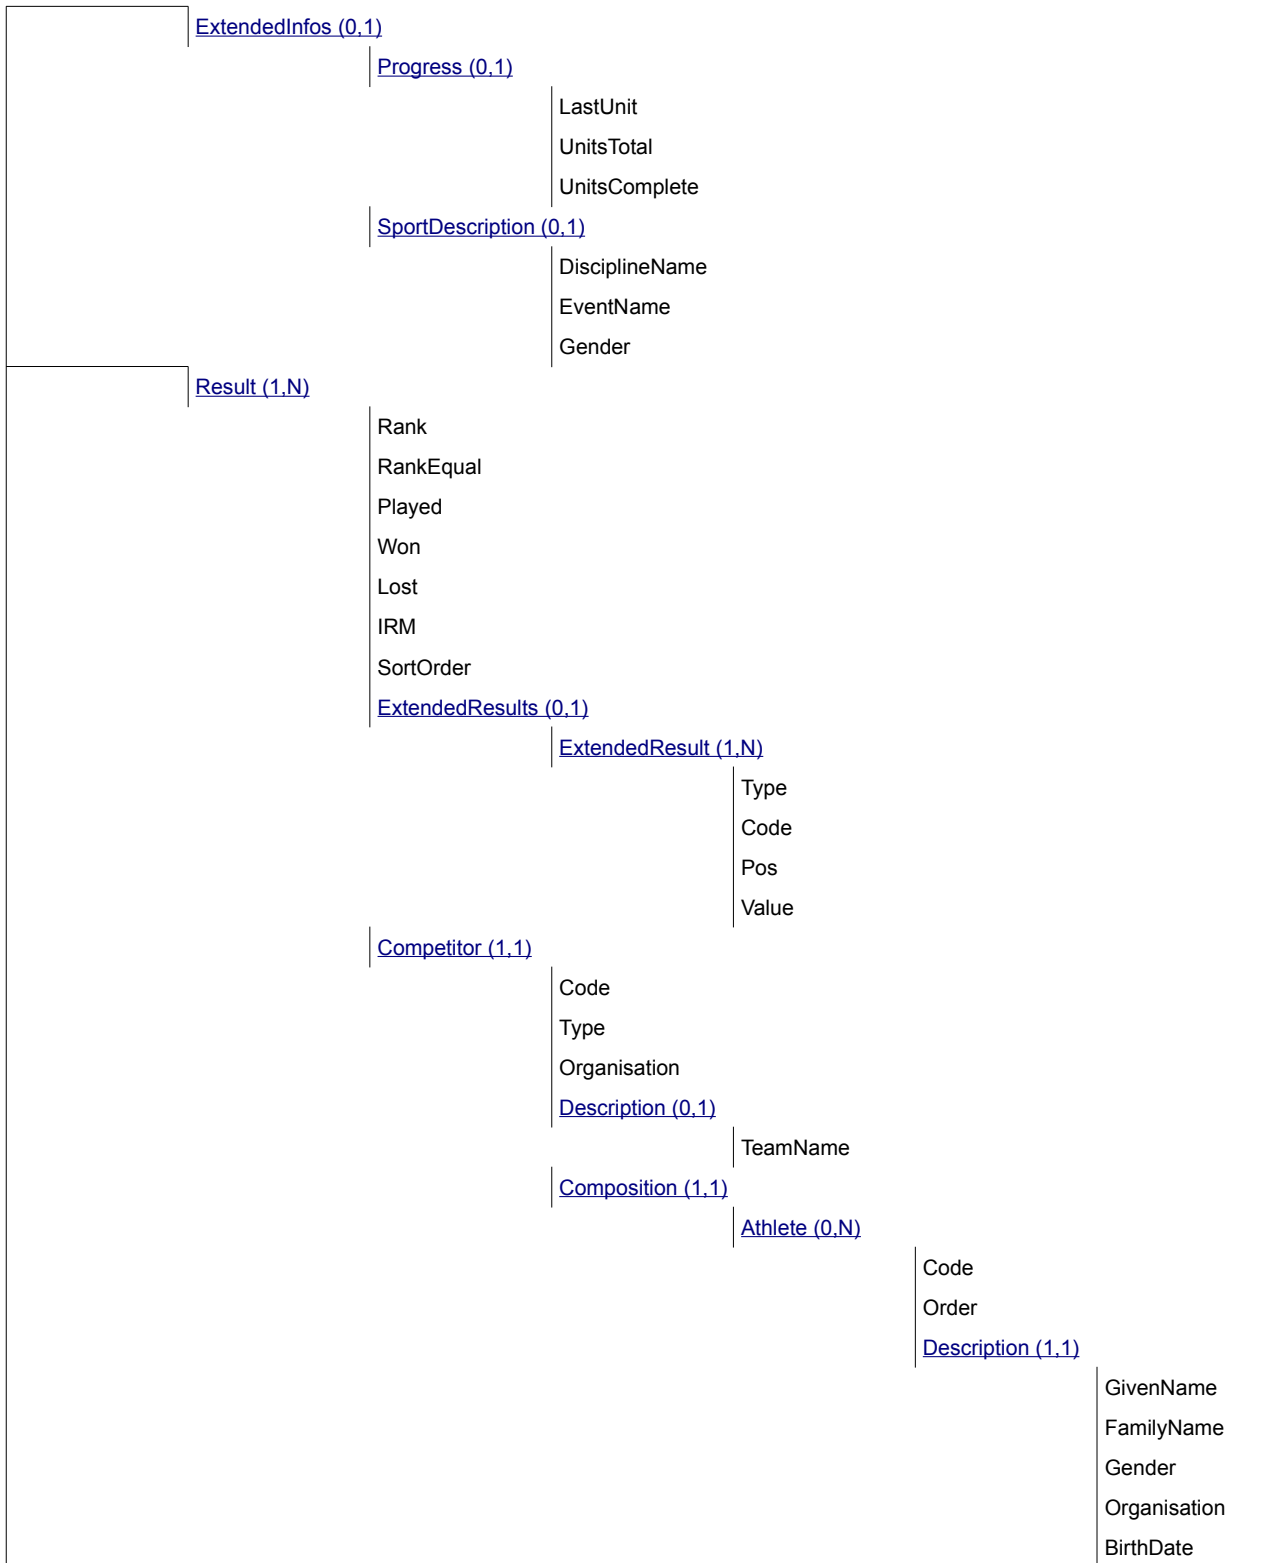



	IFld Class
--	---------------

### 2.3.11.5 Message Values

Element: Competition (0,1)			
Attribute	M/O	Value	Description
Gen	O	S(20)	Version of the General Data Dictionary applicable to the message
Sport	O	S(20)	Version of the Sport Data Dictionary applicable to the message
Codes	O	S(20)	Version of the Codes applicable to the message

Element: Competition /ExtendedInfos /Progress (0,1)			
Attribute	M/O	Value	Description
LastUnit	O	<a href="#">CC @Unit</a>	Send the full RSC of the most recently completed unit in the event.
UnitsTotal	O	Numeric ##0	Total number of units to be played in the event
UnitsComplete	O	Numeric ##0	Total number of units which are official of the UnitsTotal.

Element: Competition /ExtendedInfos /SportDescription (0,1)			
Sport Description in text			
Attribute	M/O	Value	Description
DisciplineName	M	S(40)	Discipline ENG Description (not code) from Common Codes
EventName	M	S(40)	Event ENG Description (not code) from Common Codes
Gender	M	CC @SportGender	Gender code for the event.

Element: Competition /Result (1,N)			
For any event final ranking message, there should be at least one competitor being awarded a result for the event.			
Attribute	M/O	Value	Description
Rank	O	Text	Rank of the competitor in the result. It is optional because the team can be disqualified
RankEqual	O	S(1)	Send "Y" if the Rank is equalled else do not send.
Played	O	Numeric #0	Send number of matches played.
Won	O	Numeric #0	Send number of matches won in regulation time.
Lost	O	Numeric #0	Send number of matches lost in regulation time.
IRM	O	<a href="#">SC @IRM</a>	Send if the team has been disqualified
SortOrder	M	Numeric	This attribute is a sequential number with the order of the competitors at the end of the event, if they were to be presented. It is mostly based on the rank, but it should be used



			to sort out disqualified teams.
--	--	--	---------------------------------

Element: Competition /Result /ExtendedResults /ExtendedResult (1,N)			
Type	Code	Pos	Description
ER	OTW	N/A	Element Expected: Always
	<b>Attribute</b>	<b>M/O</b>	<b>Value</b>
	Value	M	Numeric #0
ER	OTL	N/A	Element Expected: Always
	<b>Attribute</b>	<b>M/O</b>	<b>Value</b>
	Value	M	Numeric #0
ER	GF	N/A	Element Expected: Always
	<b>Attribute</b>	<b>M/O</b>	<b>Value</b>
	Value	M	Numeric #0
ER	GA	N/A	Element Expected: Always
	<b>Attribute</b>	<b>M/O</b>	<b>Value</b>
	Value	M	Numeric #0

Element: Competition /Result /Competitor (1,1)			
Competitor related to one final event result.			
Attribute	M/O	Value	Description
Code	M	S(20) with no leading zeroes or SC @CompetitorPlace	Competitor's ID. "NO_AWARD" in the case where there is no competitor in the rank due to IRM.
Type	M	S(1)	T for team
Organisation	O	<a href="#">CC @Organisation</a>	Organisation of the competitor

Element: Competition /Result /Competitor /Description (0,1)			
Attribute	M/O	Value	Description
TeamName	M	S(73)	Name of the team

Element: Competition /Result /Competitor /Composition /Athlete (0,N)			
Attribute	M/O	Value	Description
Code	M	S(20) with no leading zeroes	Athlete's ID, corresponding to an individual athlete or a team member. Team members should be participating in the event.
Order	M	Numeric #0	Order attribute used to sort team members in a team as defined in the sport



Element: Competition /Result /Competitor /Composition /Athlete /Description (1,1)			
Attribute	M/O	Value	Description
GivenName	O	S(25)	Given name in WNPA format (mixed case)
FamilyName	M	S(25)	Family name in WNPA format (mixed case)
Gender	M	<a href="#">CC @PersonGender</a>	Gender of the athlete
Organisation	M	<a href="#">CC @Organisation</a>	Athletes' organisation
BirthDate	O	Date	Birth date (example: YYYY-MM-DD). Must include if the data is available
IFId	O	S(16)	International Federation ID
Class	O	<a href="#">CC @DisplineClass</a>	Code to identify the sport class in the case of events with athletes with a disability (e.g: Paralympic Games).

### Sample (Final Ranking)

```
<Result Rank="1" SortOrder="1" Played="6" Won="5" Lost="0" >
  <ExtendedResults>
    <ExtendedResult Type="ER" Code="OTW" Value="1" />
    <ExtendedResult Type="ER" Code="OTL" Value="0" />
    <ExtendedResult Type="ER" Code="GF" Value="17" />
    <ExtendedResult Type="ER" Code="GA" Value="3" />
  </ExtendedResults>
  <Competitor Code="IHOWTEAM6---SWE01" Type="T" Organisation="SWE" >
    <Description TeamName="Sweden"/>
    <Composition>
      <Athlete Code="2002600" Order="1" />
    </Composition>
  </Competitor>
</Result>
```

### 2.3.11.6 Message Sort

Sort by Result @SortOrder



International  
Olympic  
Committee

WOG-2022-IHO-1.2 APP





### 3 Message Timeline

#### 3.1 Preparation Phase

Trigger	Message	Status	D	E	P	S	U
As soon as ODF operations start	DT_CODES		o	o	o		o
Periodically as soon as ODF operations start	DT_PARTIC		x				
	DT_PARTIC_TEAMS		x				
	DT_PARTIC_NAME		x				
	DT_SCHEDULE		x			o	o
	DT_PDF C08 Competition Schedule			x			
	DT_PDF C35A Directorate			x			
	DT_PDF C35B Competition Officials			x			

#### 3.2 Before competition

Trigger	Message	Status	D	E	P	S	U
After Initial Download - after any competition schedule change	DT_SCHEDULE_UPDATE		x		o		o
After Initial Download - as soon as Participant verification process finishes (C38/C39 process) or after any other change in participant's data	DT_PARTIC_UPDATE		x				
After Initial Download - after changes of team data	DT_PARTIC_TEAMS_UPDATE		x				
When available	DT_IMAGE	OFFICIAL	x				
For each group for each gender	DT_POOL_STANDING	START_LIST			x		
For each gender	DT_BRACKETS	START_LIST			x		
After the Initial Directorate Meeting for the gender	DT_PARTIC_UPDATE		x				
	DT_PARTIC_TEAMS_UPDATE		x				
After the Initial Directorate Meeting for the gender - for each team	DT_PDF C33 Team Roster			x			

#### 3.3 Before a game

Trigger	Message	Status	D	E	P	S	U
Roster is known (-120')	DT_RESULT	START_LIST					x
	DT_PLAY_BY_PLAY	START_LIST					x
	DT_PDF C54A Game Roster						x
	DT_PDF C58 Game Officials Assignment			x			
Line-up is known (-50)	DT_RESULT	START_LIST					x



	DT_PLAY_BY_PLAY	START_LIST							x
	DT_PDF C54B Line-ups								x
Starters Line-up is known (-10)	DT_RESULT	START_LIST							x
	DT_PLAY_BY_PLAY	START_LIST							x
	DT_PDF C54C Graphical Line-ups								x
At scheduled start time (0)	DT_SCHEDULE_UPDATE	GETTING_READY	x						o

### 3.4 During each period

Trigger	Message	Status	D	E	P	S	U
Event unit starts (at puck drop)	DT_SCHEDULE_UPDATE	RUNNING	x				o
	DT_RESULT	LIVE					x
	DT_PLAY_BY_PLAY	LIVE					x
	DT_CURRENT						x
	DT_RESULT	LIVE					x
	DT_SCHEDULE_UPDATE	SCHEDULED_BREAK	x				o
After the end of the period	DT_RESULT	INTERMEDIATE					x
	DT_PLAY_BY_PLAY	INTERMEDIATE					x
	DT_PDF C74 Game Summary						x
	DT_PDF C77A Shot Chart						x
	DT_PDF C77B Face-off Chart						x

### 3.5 After end of the game

Trigger	Message	Status	D	E	P	S	U
Game finished	DT_SCHEDULE_UPDATE	FINISHED	x				o
Game score confirmed	DT_RESULT	OFFICIAL					x
	DT_PLAY_BY_PLAY	OFFICIAL					x
	DT_PDF C74 Game Summary						x
	DT_PDF C77A Shot Chart						x
	DT_PDF C77B Face-off Chart						x
If in Preliminary Round	DT_POOL_STANDINGS	INTERMEDIATE			x		
	C76x Tournament Progress			x			
If in Play-Off	DT_BRACKETS	INTERMEDIATE		x			
	C76x Tournament Progress				x		
If changes in the schedule (game added in play-off)	DT_SCHEDULE_UPDATE	SCHEDULED	x				o
If any rank known	DT_RANKING	PARTIAL		x			
	DT_STATS	INTERMEDIATE		x			
	DT_PDF C83 Player Statistics by Team			x			
	DT_PDF C84 Team Statistics			x			



	DT_PDF C85x Statistics Leaders		x				
--	--------------------------------	--	---	--	--	--	--

### 3.6 After the Bronze Medal Game

Trigger	Message	Status	D	E	P	S	U
After the event unit is official	DT_MEDALLISTS	PARTIAL		x			
	DT_MEDALS		x				
	DT_RANKING	PARTIAL		x			

### 3.7 After the Gold Medal Game

Trigger	Message	Status	D	E	P	S	U
After the last event unit is official	DT_MEDALLISTS	OFFICIAL		x			
	DT_MEDALS		x				
	DT_MEDALLISTS_DISCIPLINE		x				
	DT_RANKING	OFFICIAL		x			
	DT_PDF C92C Medallists (Team)			x			
	DT_PDF C93 Medallists By Event		x				
	DT_PDF C95 Medal Standings		x				

Legend:

**D** Discipline; **E** Event; **P** Phase; **S** Session; **U** Unit  
**x** Sent on that level; **o** Includes info from that level



## 4 Document Control

Version history		
Version	Date	Comments
V0.1	29 Apr 2019	First version
V0.2	6 Jun 2019	Updated
V0.3	19 Aug 2019	Updated with ORIS 1.0
V0.4	27 Feb 2020	Updated with feedback
V0.5	11 May 2020	Updated
V0.6	4 Aug 2020	Updated
V0.7	4 Sep 2020	Updated
V0.8	11 Sep 2020	Updated with review
V1.0	25 Sep 2020	Update, moved to APP
V1.1	19 Mar 2021	Updated with CR021235
V1.2	30 Nov 2021	Updated after HT

### File Reference: WOG-2022-IHO-1.2 APP

Change Log		
Version	Status	Changes on version
V0.1	SFR	First version
V0.2	SFR	Updated with modification after ORIS meeting
V0.3	SFA	DT_STATS: Update for PO, MINS, SHIFTS and GK_MINS for athletes DT_PLAY_BY_PLAY: Add Actions/Action/Speed. DT_RESULTS: Add PKP (Puck Possession for the team). Change Penalty Killing percent to PK. DT_POOL_STANDING: Replace ER/WR by ER/SEED
V0.4	SFA	CR18355: Add ResultStatus START_LIST in DT_POOL_STANDING CR18395: Increase size of SessionCode in DT_SCHEDULE DT_CURRENT: Add Result element and remove Period element. DT_PARTIC: Add F_CITIZEN, M_CITIZEN, CLUB_CITY, CLUB_LEAGUE, ADD_CITIZEN at Participant /Discipline /RegisteredEvent /EventEntry DT_IMAGE: Add message DT_RESULT: Add IFId at Officials /Official /Description and Result /Competitor /Composition /Athlete /Description DT_PLAY_BY_PLAY: add IFId and Class at Actions /Action /Competitor /Composition /Athlete /Description DT_STATS: Add IFId and Class at Stats /Competitor /Composition /Athlete /Description DT_RANKING: Add IFId and Class at Stats /Competitor /Composition /Athlete /Description DT_RESULT: Add Class @ Result /Competitor /Composition /Athlete /Description DT_POOL_STANDINGS: Add UI/QUAL_RULE @ ExtendedInfos /ExtendedInfo DT_PLAY_BY_PLAY: Delete Actions /Action /ImageData DT_STATS: Add ST/MP at Stats /StatsItems /StatsItem Other minor editorial improvements without changing the intent
V0.5	SFA	Update applicable messages DT_STATS: Update DocumentSubtype to use team ID DT_PARTIC_TEAM: Add Team/ShortName and Team/TeamType [CR19497]
V0.6	SFA	Add 2.1, Ice Hockey Overview Removed UNOFFICIAL throughout as it is not applicable in this discipline. DT_RESULT: Remove Result/StartOrder DT_RESULT: Update Value at ST/GF to Mandatory at Result /Competitor /StatsItems /StatsItem and Result /Competitor /Composition /Athlete /StatsItems /StatsItem



		<p>DT_RESULT: Update StatsItem information to always send unless it is for a period and the period has not started.</p> <p>DT_RESULT: Update Value at ST/TPP to Mandatory at Result /Competitor /StatsItems /StatsItem</p> <p>DT_RESULT: Update Value at ST/GF @Pos at Result /Competitor /Composition /Athlete /StatsItems /StatsItem</p> <p>DT_RESULT: Update all instances of "SC @Period or S(3)" "to SC @Period" as S(3) is redundant</p> <p>DT_PLAY_BY_PLAY: Update DocumentSubcode in the header</p> <p>DT_POOL_STANDINGS: Update ExtendedInfos /Progress /LastUnit and ExtendedInfos /Progress /UnitsComplete</p> <p>DT_POOL_STANDINGS: Change Result /Competitor /Opponent /Organisation &amp; Date</p> <p>DT_POOL_STANDINGS: Change Result /Competitor /Opponent /Unit to Mandatory</p> <p>DT_BRACKETS: Update Bracket /BracketItems /BracketItem /Code</p> <p>DT_BRACKETS: Change Bracket /BracketItems /BracketItem /CompetitorPlace /PreviousUnit /Unit to Mandatory</p> <p>Correct typographical errors</p>
V0.7	SFA	<p>DT_PLAY_BY_PLAY: Clarify triggering</p> <p>DT_RANKING: Update Result /Competitor /Code</p> <p>Minor typographical correction not affecting message content</p>
V0.8	SFA	<p>DT_CURRENT: Update the message description</p> <p>DT_RESULT: Update Value for ST/TPP at Result /Competitor /StatsItems /StatsItem</p> <p>DT_STATS: Update Value and Avg for ST/TPP at Stats /Competitor /StatsItems /StatsItem</p> <p>DT_STATS: Update Value and Avg for ST/TSH at Stats /Competitor /StatsItems /StatsItem</p> <p>DT_POOL_STANDING: Update comment in DocumentCode in header values</p> <p>DT_POOL_STANDING: Add ER/SUB_RANK at Result /ExtendedResults /ExtendedResult</p>
V1.0	APP	<p>DT_PLAY_BY_PLAY: Update Actions/Action/Action</p>
V1.1	APP	<p>DT_RESULT: Correct typo in format of ST/GF_TOURN at Result /Competitor /StatsItems /StatsItem</p> <p>DT_RESULT: Clarify ST/MINS format at Result /Competitor /Composition /Athlete /StatsItems /StatsItem</p> <p>DT_PLAY_BY_PLAY: Update Actions/Action/Result to use codes is Action is P (Penalty to allow translation and add missing actions)</p> <p>DT_PLAY_BY_PLAY: Update triggering</p> <p>DT_PLAY_BY_PLAY: Fix typo to remove Type values at Actions /Action /ExtendedAction as these are not supported in GEN</p> <p>DT_STATS: Add ST/ASSIST at Competitor /StatsItems /StatsItem</p> <p>DT_STATS: Add ST/PTS at Competitor /StatsItems /StatsItem</p> <p>DT_PARTIC: Update Description of Participant/Height and Participant/Weight to exclude use in Paralympic Games.</p> <p>DT_RESULT: Correct typo in Description of DISPLAY at ExtendedInfos /ExtendedInfo to replace GOAL with GF.</p> <p>DT_STATS: Update ST/GF/Percent at Stats /Competitor /Composition /Athlete /StatsItems /StatsItem /ExtendedStatto not include if no attempts.</p>
V1.2	APP	<p>DT_PARTIC: Remove ENTRY/ADD_CITIZEN, M_CITIZEN and F_CITIZEN at Participant /Discipline /RegisteredEvent /EventEntry [HPQC199268]</p> <p>2.1 Update description for Paralympic to include mixed [editorial change].</p> <p>DT_RESULT: Update Value of ST/PPN at Result /Competitor /StatsItems /StatsItem [HPQC199287]</p> <p>DT_RESULT: Update Result/Result for double forfeit. [HPQC199340]</p> <p>DT_RESULT: Remove ST/PKP at Result /Competitor /StatsItems /StatsItem [HPQC199355]</p> <p>DT_PLAY_BY_PLAY: Remove Actions/Actions/X and Y [HPQC199296]</p> <p>DT_PLAY_BY_PLAY: Update Actions /Action /When [editorial change]</p> <p>DT_PLAY_BY_PLAY: Add ExtendedInfos/ExtendedInfo [HPQC199327]</p> <p>DT_BRACKETS: Update Triggers and Bracket /BracketItems [HPQC199313]</p> <p>DT_STATS: Update Value of ST/PIM/Avg at Stats /Competitor /StatsItems /StatsItem /ExtendedStat and athlete level [HPQC199310]</p> <p>DT_STATS: Add Rank, RankEqual and SortOrder for ST/FO at Composition /Athlete /StatsItems /StatsItem /ExtendedStat [HPQC199328]</p> <p>DT_STATS: Remove ST/PO at Stats /Competitor /Composition /Athlete /StatsItems /StatsItem [HPQC199355]</p> <p>DT_RANKING: Update Result/Won and Result/Lost [HPQC199335]</p>